4832, solder terminal, screened, 3-pole, Audio Plug/Sockets, 3.5 mm



Approvals and Compliances

Description

- Solder terminal : for cable mounting
- Audio entrances and exits
- Data and Signal transfer
- Audio Plug: 3-pole , shielded , straight

References

Alternative: Housing insulated 4832.1310; 4832.1320

hnical	

Diameter	3.5 mm
Number of Poles	3-pole
Ratings DC	0.5 A / 30 VDC
Ratings AC	0.5 A / 30 VAC
Dielectric Strength	500 VDC
Insulation Resistance	> 100 MΩ @ 500 VDC

Allowable Operation Tempe-	-20°C to 70°C
rature	
Terminal	solder terminal nickel-plated
Housings	screened
Style	straight
Lifetime	5000 Insertions

Approvals and Compliances


Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

Compliances

The product complies with following Guide Lines

Identification	Details	Initiator	Description
RoHS	RoHS	SCHURTER AG	EU Directive RoHS 2011/65/EU
50	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.

Dimensions [mm]

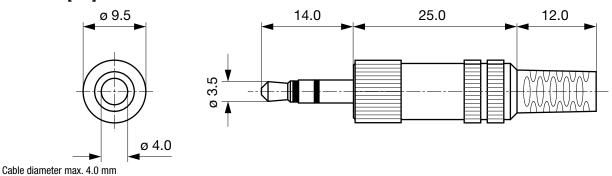

All Variants

Product group	Diameter [mm]	Number of Poles	Terminal	Order Number	_
Audio Plug/Sockets	3.5	3-pole	solder terminal	4832.1300	

Most Popular.

Availability for all products can be searched real-time:https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER

Packaging unit

100 Pcs

Mating Outlets/Connectors

Category / Description

Audio Plug/Sockets Overview complete

4832, solder terminal, screened, 3-pole, Audio Plug/Sockets, 3.5 mm	4832.2300
4832, PCB terminals, screened, 3-pole, Audio Plug/Sockets, 3.5 mm	4832.2320
4832, PCB terminals, insulated, 3-pole, Audio Plug/Sockets, 3.5 mm	4832.2330
4832, solder terminal, insulated, 3-pole, Audio Plug/Sockets, 3.5 mm	4832.3300
Audio Plug/Sockets further types to 4832.1300	

The specifications, descriptions and illustrations indicated in this document are based on current

product selected for their own applications.