

2 Megabit (256K x 8) SuperFlash MTP

SST27SF020, SST27VF020



Preliminary Specifications

FEATURES:

- **5.0-Volt Read Operation for 27SF020**
- **2.7-Volt Read Operation for 27VF020**
- **Superior Reliability**
 - Endurance: Minimum 1000 Cycles
 - Greater than 100 years Data Retention
- **Low Power Consumption**
 - Active Current: 20 mA (typical) for 5V and 10 mA (typical) for 2.7V
 - Standby Current: 10 μ A (typical) for both 27SF020 and 27VF020
- **Fast Access Time**
 - 5.0-Volt Read - 90 and 120 ns
 - 2.7-Volt Read - 200 and 250 ns
- **Fast Programming Operation**
 - 20 μ s per byte
 - 5.4 second for the entire chip
- **Features Electrical Erase**
 - Does Not Require UV Source
 - Chip Erase Time: 100 ms
- **TTL I/O Compatibility**
- **JEDEC Standard Byte-wide EPROM Pinouts**
- **12V Power Supply for Programming/Erase**
- **Packages Available**
 - 32-Pin PLCC
 - 32-Pin Plastic DIP
 - 32-Pin TSOP

PRODUCT DESCRIPTION

The 27SF020/27VF020 are a 256K x 8 CMOS, many time programmable (MTP) low cost flash memories, manufactured with SST's proprietary, high performance SuperFlash technology. The split gate cell design and thick oxide tunneling injector attain better reliability and manufacturability compared with alternate approaches. The 27SF020/27VF020 can be electrically erased and programmed at least 1000 times using an external programmer. The 27SF020/27VF020 have to be erased prior to programming. The 27SF020/27VF020 conform to JEDEC standard pinouts for byte-wide memories.

Featuring high performance byte programming, the 27SF020/27VF020 provide a byte-program time of 20 μ s. The entire memory can be programmed byte by byte in 5.4 seconds. Designed, manufactured, and tested for a wide spectrum of applications, the 27SF020/27VF020 are offered with an endurance of 1000 cycles. Data retention is rated at greater than 100 years.

The 27SF020/27VF020 are suited for applications that require infrequent writes and low power nonvolatile storage. The 27SF020/27VF020 will improve flexibility, efficiency, and performance while matching the low cost in nonvolatile applications that currently use UV-EPROMs, OTPs, and mask ROMs.

To meet surface mount and conventional through hole requirements, the 27SF020/27VF020 are offered in 32-pin PLCC, 32-pin PDIP and 32-pin TSOP packages. See Figures 1 and 2 for pinouts.

Device Operation

The 27SF020/27VF020 are low cost flash solutions that can be used to replace existing UV-EPROM, OTP, and mask ROM sockets. It is functionally (read and program) and pin compatible with industry standard EPROM products. In addition to EPROM functionality, the device also supports electrical erase operation via an external programmer. The 27SF020/27VF020 do not require a UV source to erase, and therefore the packages do not have a window.

Read

The Read operation of the 27SF020/27VF020 are controlled by CE# and OE#. Both CE# and OE# have to be low for the system to obtain data from the outputs. Once the address is stable, the address access time is equal to the delay from CE# to output (T_{CE}). Data is available at the output after a delay of T_{OE} from the falling edge of OE#, assuming that CE# pin has been low and the addresses have been stable for at least $T_{CE} - T_{OE}$. When the CE# pin is high, the chip is deselected and a typical standby current of 10 μ A is consumed. OE# is the output control and is used to gate data from the output pins. The data bus is in high impedance state when either CE# or OE# is high.

Programming operation

The 27SF020/27VF020 are programmed by using an external programmer. The programming mode is activated by asserting 12V ($\pm 5\%$) on Vpp pin, $V_{CC} = 5V \pm 5\%$, V_{IL} on CE# pin, and V_{IH} on OE# pin. The device is programmed byte by byte with the desired data at the desired address using a single pulse (PGM# pin low) of



2 Megabit SuperFlash MTP SST27SF020, SST27VF020

Preliminary Specifications

20 μ s. Using the MTP programming algorithm, the byte programming process continues byte by byte until the entire chip (256K bytes) has been programmed.

Chip Erase Operation

The only way to change a data from a "0" to "1" is by electrical erase that changes every bit in the device to "1". Unlike traditional EPROMs, which use UV light to do the chip erase, the 27SF020/27VF020 use an electrical chip erase operation. This saves a significant amount of time (about 30 minutes for erase operation). The entire chip can be erased in a single pulse of 100 ms (PGM# pin low). In order to activate the erase mode, the 12V ($\pm 5\%$) is applied to V_{PP} and A_9 pins, $V_{CC} = 5V \pm 5\%$, V_{IL} on CE# pin, and V_{IH} on OE# pin. All other address and data pins are "don't care". The falling edge of PGM# will start the Chip Erase operation. Once the chip has been erased, all bytes must be verified for FF. Refer to figure 8 for the flow chart.

The 27SF020/27VF020 can also be reprogrammed in the system. This requires the availability of 12V for V_{PP} to program and an additional 12V for address A_9 to erase.


Product Identification Mode

The product identification mode identifies the device as the 27SF020/27VF020 and manufacturer as SST. This mode may be accessed by hardware method. To activate this mode, the programming equipment must force V_H ($12V \pm 5\%$) on address A_9 with V_{PP} pin at $5V \pm 10\%$. Two identifier bytes may then be sequenced from the device outputs by toggling address line A_0 . For details, see Table 3 for hardware operation.

TABLE 1: PRODUCT IDENTIFICATION TABLE

	Byte	Data
Manufacturer's Code	0000 H	BF H
27SF020 Device Code	0001 H	A6 H
27VF020 Device Code	0001 H	C6 H

319 PGM T1.0

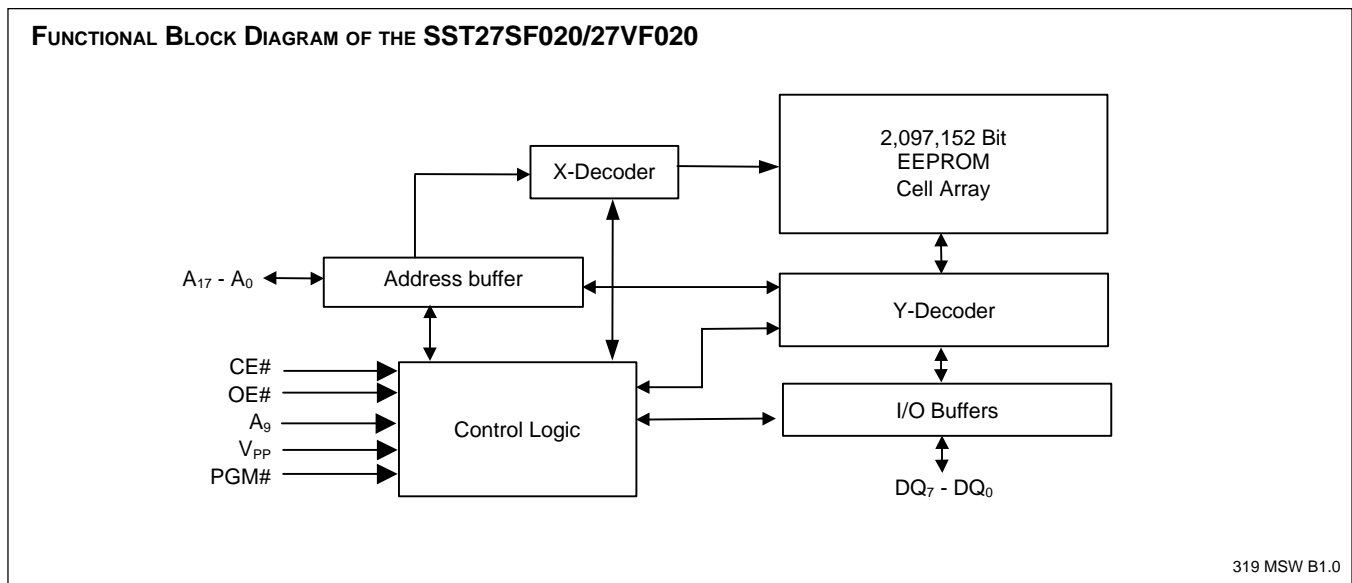



2 Megabit SuperFlash MTP SST27SF020, SST27VF020

Preliminary Specifications

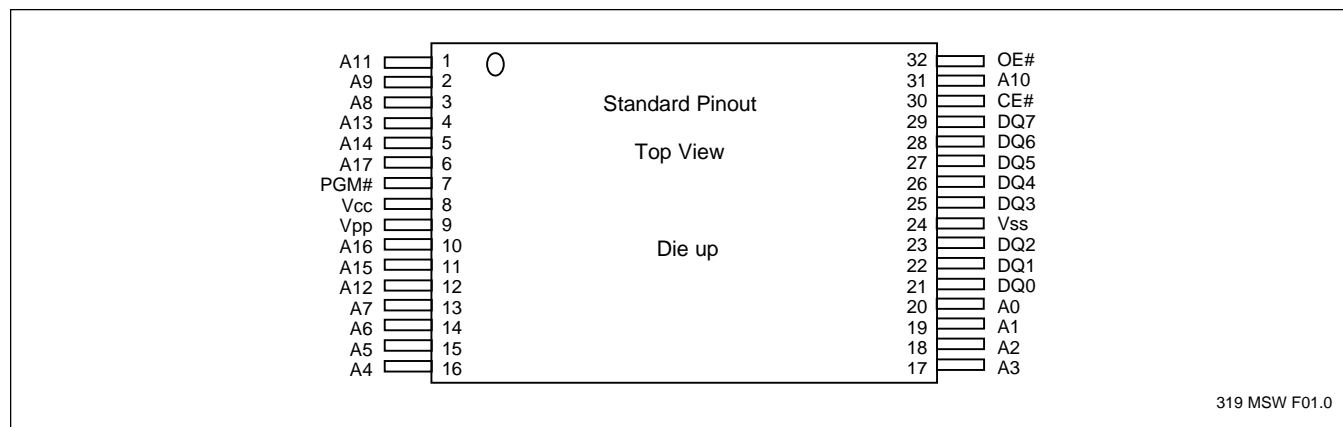


FIGURE 1: PIN ASSIGNMENTS FOR 32-PIN TSOP PACKAGES

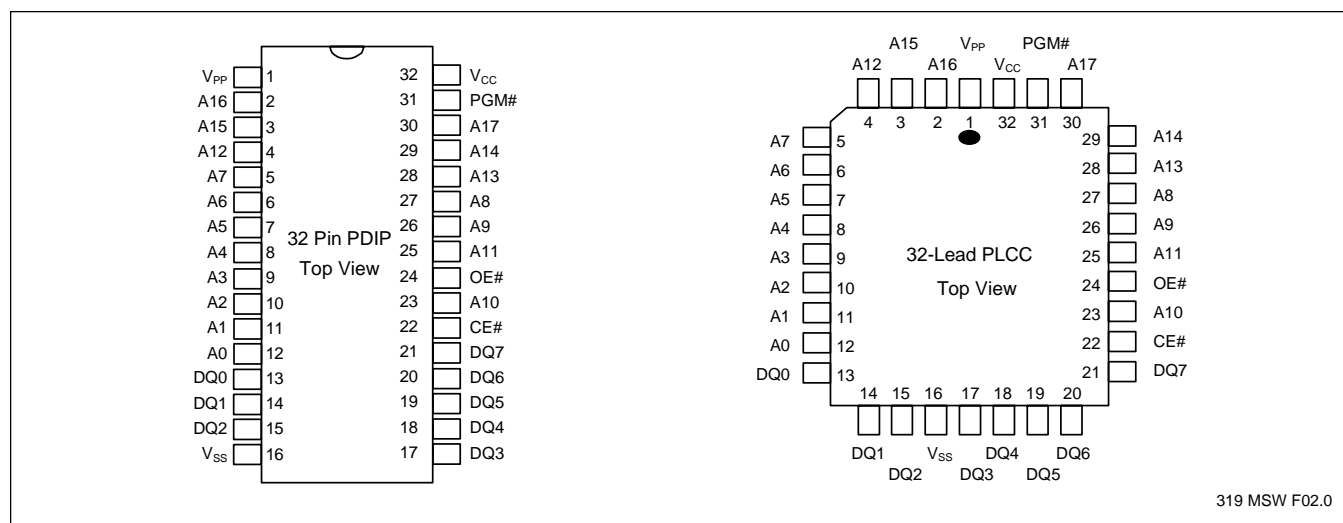


FIGURE 2: PIN ASSIGNMENTS FOR 32-PIN PLASTIC DIPs AND 32-LEAD PLCCs

TABLE 2: PIN DESCRIPTION

Symbol	Pin Name	Functions
A ₁₇ -A ₀	Address Inputs	To provide memory addresses
DQ ₇ -DQ ₀	Data Input/Output	To output data during read cycles and receive input data during program cycle, the outputs are in tri-state when OE# or CE# is high
CE#	Chip Enable	To activate the device when CE# is low
OE#	Output Enable	To gate the data output buffers during read operation
PGM#	Program/Erase Pin	Used for program or erase (PGM# = V _{IL} pulse during program or erase)
V _{PP}	Power Supply for Program or Erase	High voltage pin during chip erase and programming operation 12-volt (±5%)
V _{CC}	Power Supply	To provide 5-volt supply (±10%) for the 27SF020 and 3-volt supply (2.7-3.6 V) for the 27VF020
V _{SS}	Ground	

319 PGM T2.1



TABLE 3: OPERATION MODES SELECTION

Mode	CE#	OE#	PGM#	A ₉	V _{PP}	DQ	Address
Read	V _{IL}	V _{IL}	X	A _{IN}	V _{CC} or V _{SS}	D _{OUT}	A _{IN}
Output Disable	V _{IL}	V _{IH}	X	X	V _{CC} or V _{SS}	High Z	A _{IN}
Program	V _{IL}	V _{IH}	V _{IL}	A _{IN}	V _{PPH}	D _{IN}	A _{IN}
Standby	V _{IH}	X	X	X	V _{CC} or V _{SS}	High Z	X
Chip Erase	V _{IL}	V _{IH}	V _{IL}	V _H	V _{PPH}	High Z	X
Program/Erase Inhibit	V _{IH}	X	X	X	V _{PPH}	High Z	X
Product Identification	V _{IL}	V _{IL}	X	V _H	V _{CC} or V _{SS}	Manufacturer Code (BF) Device Code (A6 for 27SF020 & C6 for 27VF020)	A ₁₇ -A ₁ = V _{IL} , A ₀ = V _{IL} A ₁₇ -A ₁ = V _{IL} , A ₀ = V _{IH}

Note: X = V_{IL} or V_{IH}
V_{PPH} = 12V±5%, V_H = 12V±5%

319 PGM T3.0

Absolute Maximum Stress Ratings (Applied conditions greater than those listed under “Absolute Maximum Stress Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these conditions or conditions greater than those defined in the operational sections of this data sheet is not implied. Exposure to absolute maximum stress rating conditions may affect device reliability.)

Temperature Under Bias	-55°C to +125°C
Storage Temperature	-65°C to +150°C
D. C. Voltage on Any Pin to Ground Potential	-0.5V to V _{CC} + 0.5V
Transient Voltage (<20 ns) on Any Pin to Ground Potential	-1.0V to V _{CC} + 1.0V
Voltage on A ₉ and V _{PP} Pin to Ground Potential	-0.5V to 14.0V
Package Power Dissipation Capability (T _A = 25°C)	1.0W
Through Hole Lead Soldering Temperature (10 Seconds)	300°C
Surface Mount Lead Soldering Temperature (3 Seconds)	240°C
Output Short Circuit Current ⁽¹⁾	100 mA

Note: ⁽¹⁾ Outputs shorted for no more than one second. No more than one output shorted at a time.

27SF020 OPERATING RANGE (READ)

Range	Ambient Temp	V _{CC}
Commercial	0°C to +70°C	5V±10%
Industrial	-40°C to +85°C	5V±10%

AC CONDITIONS OF TEST

Input Rise/Fall Time	10 ns
Output Load	1 TTL Gate and C _L = 100 pF
See Figures 6 and 7	

27VF020 OPERATING RANGE (READ)

Range	Ambient Temp	V _{CC}
Commercial	0°C to +70°C	2.7-3.6V
Industrial	-40°C to +85°C	2.7-3.6V

AC CONDITIONS OF TEST

Input Rise/Fall Time	10 ns
Output Load	1 TTL Gate and C _L = 100 pF
See Figures 6 and 7	



2 Megabit SuperFlash MTP SST27SF020, SST27VF020

Preliminary Specifications

TABLE 4: 27SF020 READ MODE DC OPERATING CHARACTERISTICS

$V_{CC} = 5 V \pm 10\%$, $T_A = 0^\circ C$ to $70^\circ C$ (Commercial) or $-40^\circ C$ to $+85^\circ C$ (Industrial)

Symbol	Parameter	Limits			Test Conditions
		Min	Max	Units	
I _{CC}	V _{CC} Read Current		30	mA	CE# = OE# = V _{IL} all I/Os open, Address Input = V _{IL} /V _{IH} at f = 1/T _{RC} Min, V _{CC} = V _{CC} Max
I _{PPR}	V _{PP} Read Current		100	μA	CE# = OE# = V _{IL} , all I/Os open, Address Input = V _{IL} /V _{IH} at f = 1/T _{RC} Min, V _{CC} = V _{CC} Max, V _{pp} = V _{CC}
I _{SB1}	Standby V _{CC} Current (TTL input)		3	mA	CE# = OE# = V _{IH} , V _{CC} = V _{CC} Max
I _{SB2}	Standby V _{CC} Current (CMOS input)		50	μA	CE# = OE# = V _{CC} - 0.3V V _{CC} = V _{CC} Max.
I _{LI}	Input Leakage Current		1	μA	V _{IN} = GND to V _{CC} , V _{CC} = V _{CC} Max
I _{LO}	Output Leakage Current		10	μA	V _{OUT} = GND to V _{CC} , V _{CC} = V _{CC} Max
V _{IL}	Input Low Voltage		0.8	V	V _{CC} = V _{CC} Max
V _{IH}	Input High Voltage	2.0	V _{CC} +0.5	V	V _{CC} = V _{CC} Max
V _{OL}	Output Low Voltage		0.4	V	I _{OL} = 2.1 mA, V _{CC} = V _{CC} Min
V _{OH}	Output High Voltage	2.4		V	I _{OH} = -400 μA, V _{CC} = V _{CC} Min
I _H	Supervoltage Current for A ₉		100	μA	CE# = OE# = V _{IL} , A ₉ = V _H

319 PGM T4.3

TABLE 5: 27VF020 READ MODE DC OPERATING CHARACTERISTICS

$V_{CC} = 2.7-3.6V$, $T_A = 0^\circ C$ to $70^\circ C$ (Commercial) or $-40^\circ C$ to $+85^\circ C$ (Industrial)

Symbol	Parameter	Limits			Test Conditions
		Min	Max	Units	
I _{CC}	V _{CC} Read Current		12	mA	CE# = OE# = V _{IL} all I/Os open, Address input = V _{IL} /V _{IH} at f = 1/T _{RC} Min., V _{CC} = V _{CC} Max
I _{PPR}	V _{PP} Read Current		100	μA	CE# = OE# = V _{IL} , all I/Os open, Address Input = V _{IL} /V _{IH} at f = 1/T _{RC} Min, V _{CC} = V _{CC} Max, V _{pp} = V _{CC}
I _{SB1}	Standby V _{CC} Current (TTL input)		1	mA	CE# = OE# = V _{IH} , V _{CC} = V _{CC} Max.
I _{SB2}	Standby V _{CC} Current (CMOS input)		15	μA	CE# = OE# = V _{CC} - 0.3V. V _{CC} = V _{CC} Max.
I _{LI}	Input Leakage Current		1	μA	V _{IN} = GND to V _{CC} , V _{CC} = V _{CC} Max.
I _{LO}	Output Leakage Current		10	μA	V _{OUT} = GND to V _{CC} , V _{CC} = V _{CC} Max.
V _{IL}	Input Low Voltage		0.8	V	V _{CC} = V _{CC} Max.
V _{IH}	Input High Voltage	2.0	V _{CC} +0.5	V	V _{CC} = V _{CC} Max.
V _{OL}	Output Low Voltage		0.4	V	I _{OL} = 100 μA, V _{CC} = V _{CC} Min.
V _{OH}	Output High Voltage	2.4		V	I _{OH} = -100 μA, V _{CC} = V _{CC} Min.
I _H	Supervoltage Current for A ₉		100	μA	CE# = OE# = V _{IL} , A ₉ = V _H

319 PGM T5.3



TABLE 6: 27SF020/27VF020 PROGRAM/ERASE DC OPERATING CHARACTERISTICS

$V_{CC} = 5 V \pm 10\%$, $V_{PP} = V_{PPH}$, $T_A = 25^\circ C \pm 5^\circ C$

Symbol	Parameter	Limits			Test Conditions
		Min	Max	Units	
I _{CP}	V _{CC} Erase or Program Current		30	mA	CE# = V _{IL} , V _{pp} = 12V±5%, V _{CC} = V _{CC} Max
I _{PP}	V _{PP} Erase or Program Current		1	mA	CE# = V _{IL} , V _{pp} = 12V±5%, V _{CC} = V _{CC} Max
I _{LI}	Input Leakage Current		1	µA	V _{IN} = GND to V _{CC} , V _{CC} = V _{CC} Max
I _{LO}	Output Leakage Current		10	µA	V _{OUT} = GND to V _{CC} , V _{CC} = V _{CC} Max
V _H	Supervoltage for A ₉	11.4	12.6	V	CE# = OE# = V _{IL}
I _H ⁽¹⁾	Supervoltage Current for A ₉		200	µA	CE# = OE# = V _{IL} , A ₉ = V _H Max
V _{PPH}	High Voltage for V _{PP} Pin	11.4	12.6	V	

319 PGM T6.0

Note: ⁽¹⁾ This parameter is measured only for initial qualification and after the design or process change that could affect this parameter.

TABLE 7: POWER-UP TIMINGS

Symbol	Parameter	Maximum	Units
T _{PU-READ} ⁽¹⁾	Power-up to Read Operation	100	µs

319 PGM T7.0

Note: ⁽¹⁾ This parameter is measured only for initial qualification and after a design or process change that could affect this parameter.

TABLE 8: CAPACITANCE (T_A = 25 °C, f=1 MHz, other pins open)

Parameter	Description	Test Condition	Maximum
C _{I/O} ⁽¹⁾	I/O Pin Capacitance	V _{I/O} = 0V	12 pF
C _{IN} ⁽¹⁾	Input Capacitance	V _{IN} = 0V	6 pF

319 PGM T8.0

Note: ⁽¹⁾ This parameter is measured only for initial qualification and after a design or process change that could affect this parameter.

TABLE 9: RELIABILITY CHARACTERISTICS

Symbol	Parameter	Minimum Specification	Units	Test Method
N _{END}	Endurance	1000	Cycles	MIL-STD-883, Method 1033
T _{DR} ⁽¹⁾	Data Retention	100	Years	JEDEC Standard A103
V _{ZAP_HBM} ⁽¹⁾	ESD Susceptibility Human Body Model	2000	Volts	JEDEC Standard A114
V _{ZAP_MM} ⁽¹⁾	ESD Susceptibility Machine Model	300	Volts	JEDEC Standard A115
I _{LTH} ⁽¹⁾	Latch Up	100	mA	JEDEC Standard 78

319 PGM T9.1

Note: ⁽¹⁾ This parameter is measured only for initial qualification and after a design or process change that could affect this parameter.



2 Megabit SuperFlash MTP SST27SF020, SST27VF020

Preliminary Specifications

AC CHARACTERISTICS

TABLE 10: 27SF020 READ CYCLE TIMING PARAMETERS

Symbol	Parameter	27SF020-90		27SF020-120		Units
		Min	Max	Min	Max	
T _{RC}	Read Cycle Time	90		120		ns
T _{CE}	Chip Enable Access Time		90		120	ns
T _{AA}	Address Access Time		90		120	ns
T _{OE}	Output Enable Access Time		40		50	ns
T _{CLZ} ⁽¹⁾	CE# Low to Active Output	0		0		ns
T _{OLZ} ⁽¹⁾	OE# Low to Active Output	0		0		ns
T _{CHZ} ⁽¹⁾	CE# High to High-Z Output		30		30	ns
T _{OHZ} ⁽¹⁾	OE# High to High-Z Output		30		30	ns
T _{OH} ⁽¹⁾	Output Hold from Address Change	0		0		ns

319 PGM T10.0

TABLE 11: 27VF020 READ CYCLE TIMING PARAMETERS

Symbol	Parameter	27VF020-200		27VF020-250		Units
		Min	Max	Min	Max	
T _{RC}	Read Cycle Time	200		250		ns
T _{CE}	Chip Enable Access Time		200		250	ns
T _{AA}	Address Access Time		200		250	ns
T _{OE}	Output Enable Access Time		100		120	ns
T _{CLZ} ⁽¹⁾	CE# Low to Active Output	0		0		ns
T _{OLZ} ⁽¹⁾	OE# Low to Active Output	0		0		ns
T _{CHZ} ⁽¹⁾	CE# High to High-Z Output		50		50	ns
T _{OHZ} ⁽¹⁾	OE# High to High-Z Output		50		50	ns
T _{OH} ⁽¹⁾	Output Hold from Address Change	0		0		ns

319 PGM T11.0



2 Megabit SuperFlash MTP SST27SF020, SST27VF020


Preliminary Specifications

TABLE 12: PROGRAMMING/ERASE CYCLE TIMING PARAMETERS

Symbol	Parameter	Min	Max	Units
T _{CES} ⁽¹⁾	CE# Setup Time	2		μs
T _{CEH} ⁽¹⁾	CE# Hold Time	2		μs
T _{AS} ⁽¹⁾	Address Setup Time	2		μs
T _{AH} ⁽¹⁾	Address Hold Time	2		μs
T _{PRT} ⁽¹⁾	V _{PP} Pulse Rise Time	50		ns
T _{VPS} ⁽¹⁾	V _{PP} Setup Time	2		μs
T _{VPH} ⁽¹⁾	V _{PP} Hold Time	2		μs
T _{PW}	PGM# Program Pulse Width	20	40	μs
T _{EW}	PGM# Erase Pulse Width	100	500	ms
T _{DS} ⁽¹⁾	Data Setup Time	2		μs
T _{DH} ⁽¹⁾	Data Hold Time	2		μs
T _{VR} ⁽¹⁾	A ₉ Recovery Time for Erase	2		μs
T _{ART}	A ₉ Rise Time to 12V during Erase	50		ns
T _{A9S} ⁽¹⁾	A ₉ Setup Time during Erase	2		μs
T _{A9H} ⁽¹⁾	A ₉ Hold Time during Erase	2		μs


319 PGM T12.0

Note: ⁽¹⁾This parameter is measured only for initial qualification and after the design or process change that could affect this parameter.

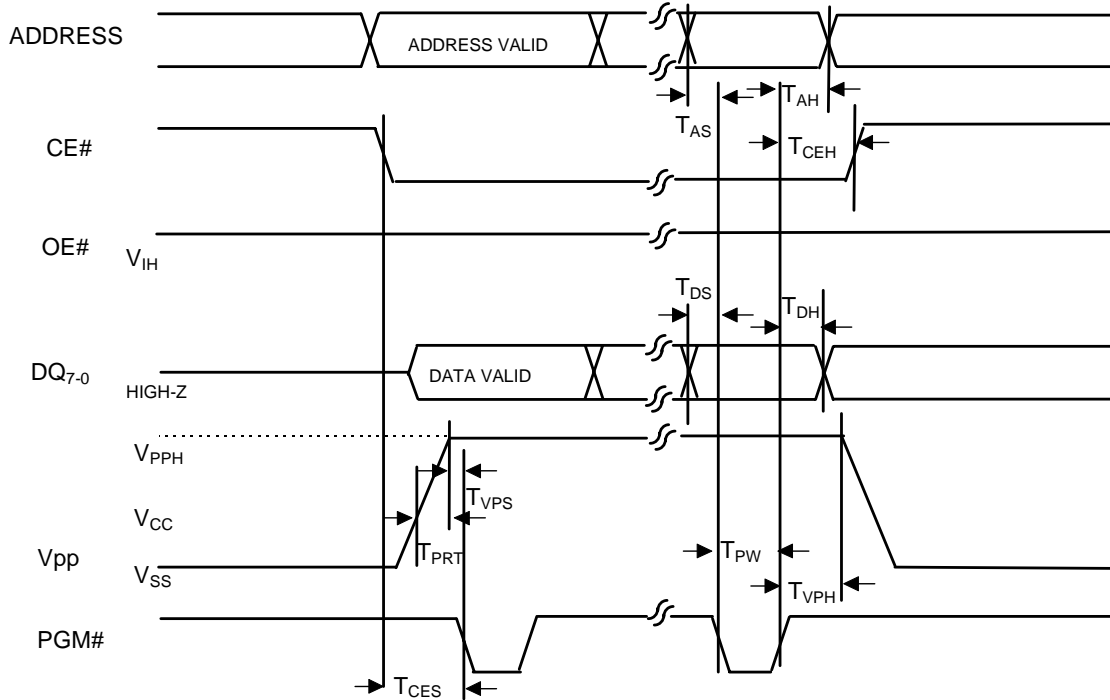

319 AC F05.0

FIGURE 5: PROGRAM TIMING DIAGRAM

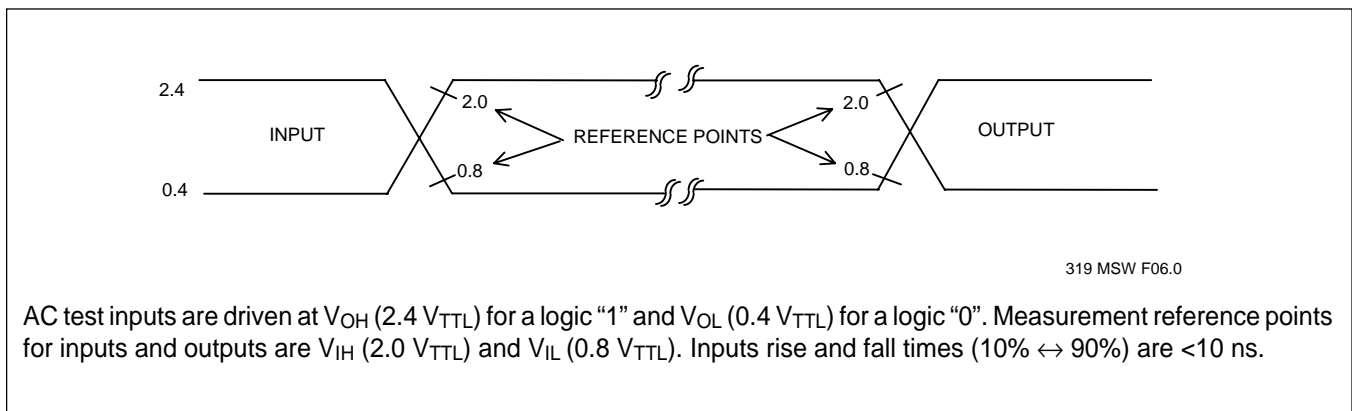

319 MSW F06.0

AC test inputs are driven at V_{OH} (2.4 V_{TTL}) for a logic "1" and V_{OL} (0.4 V_{TTL}) for a logic "0". Measurement reference points for inputs and outputs are V_{IH} (2.0 V_{TTL}) and V_{IL} (0.8 V_{TTL}). Inputs rise and fall times (10% \leftrightarrow 90%) are <10 ns.

FIGURE 6: AC INPUT/OUTPUT REFERENCE WAVEFORMS

2 Megabit SuperFlash MTP SST27SF020, SST27VF020



Preliminary Specifications


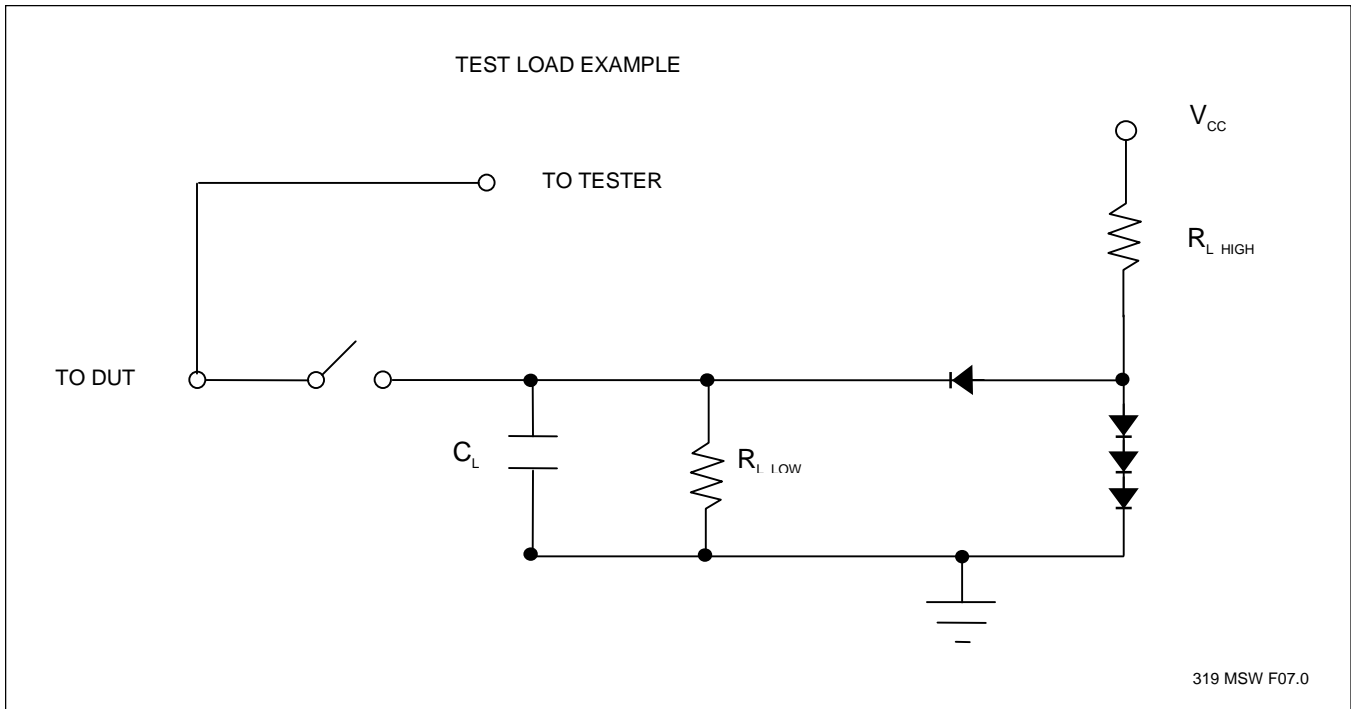


FIGURE 7: TEST LOAD EXAMPLE




319 MSW F08.0

FIGURE 8: ERASE ALGORITHM

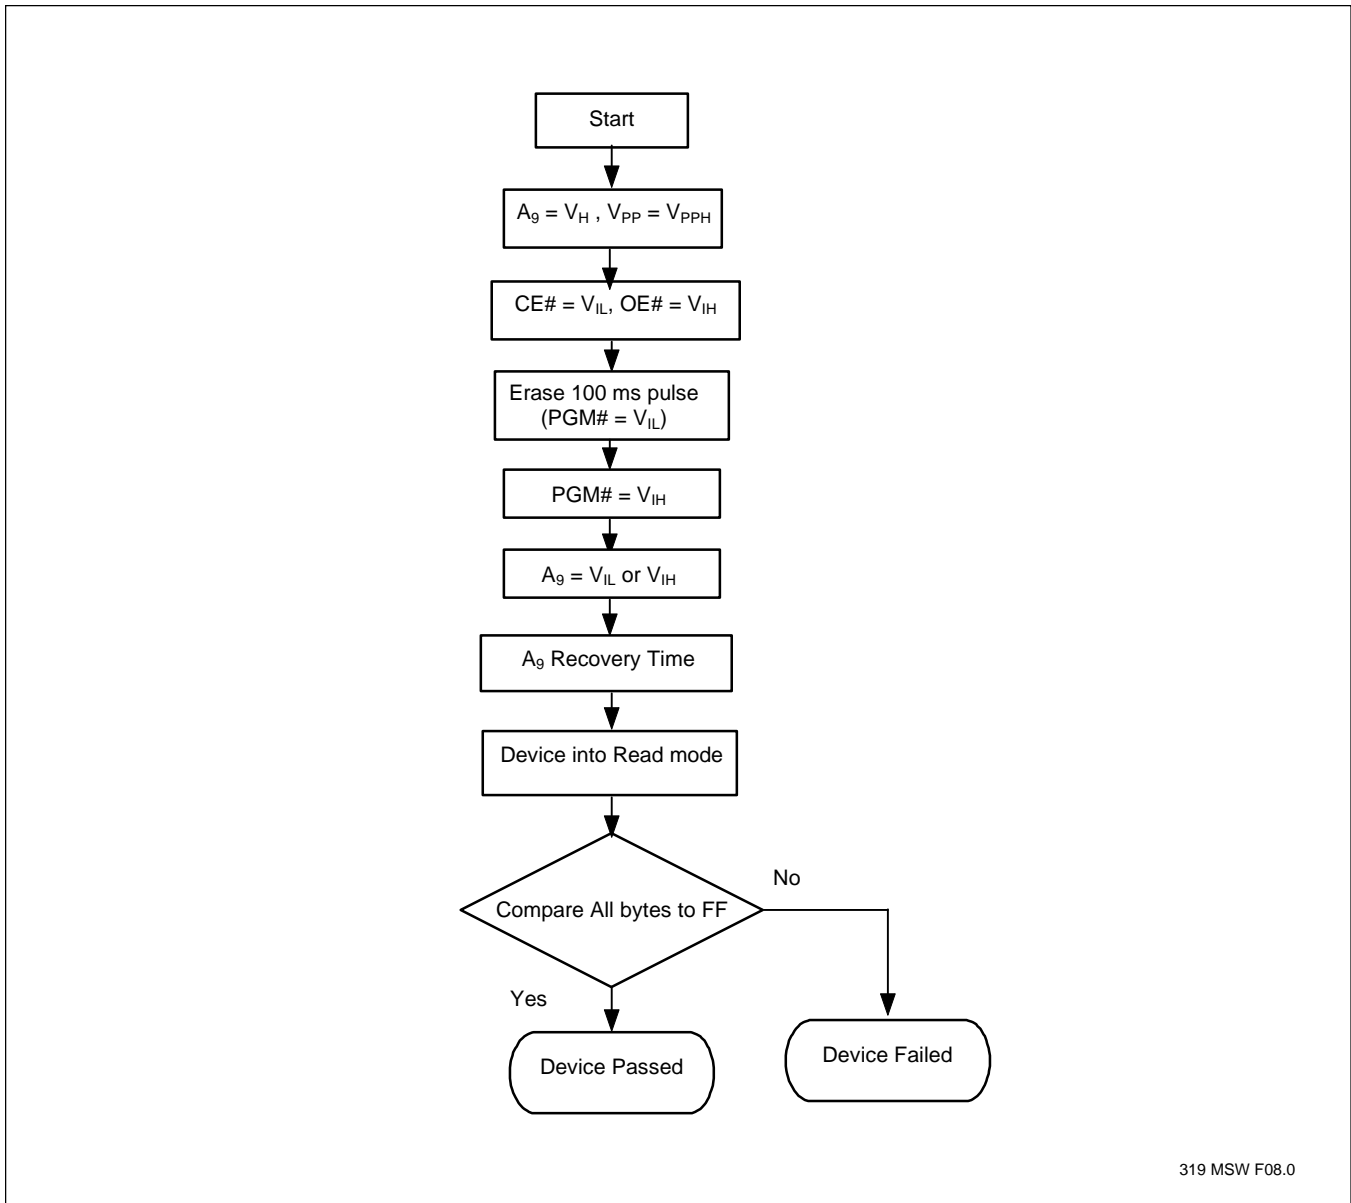

2 Megabit SuperFlash MTP SST27SF020, SST27VF020

Preliminary Specifications

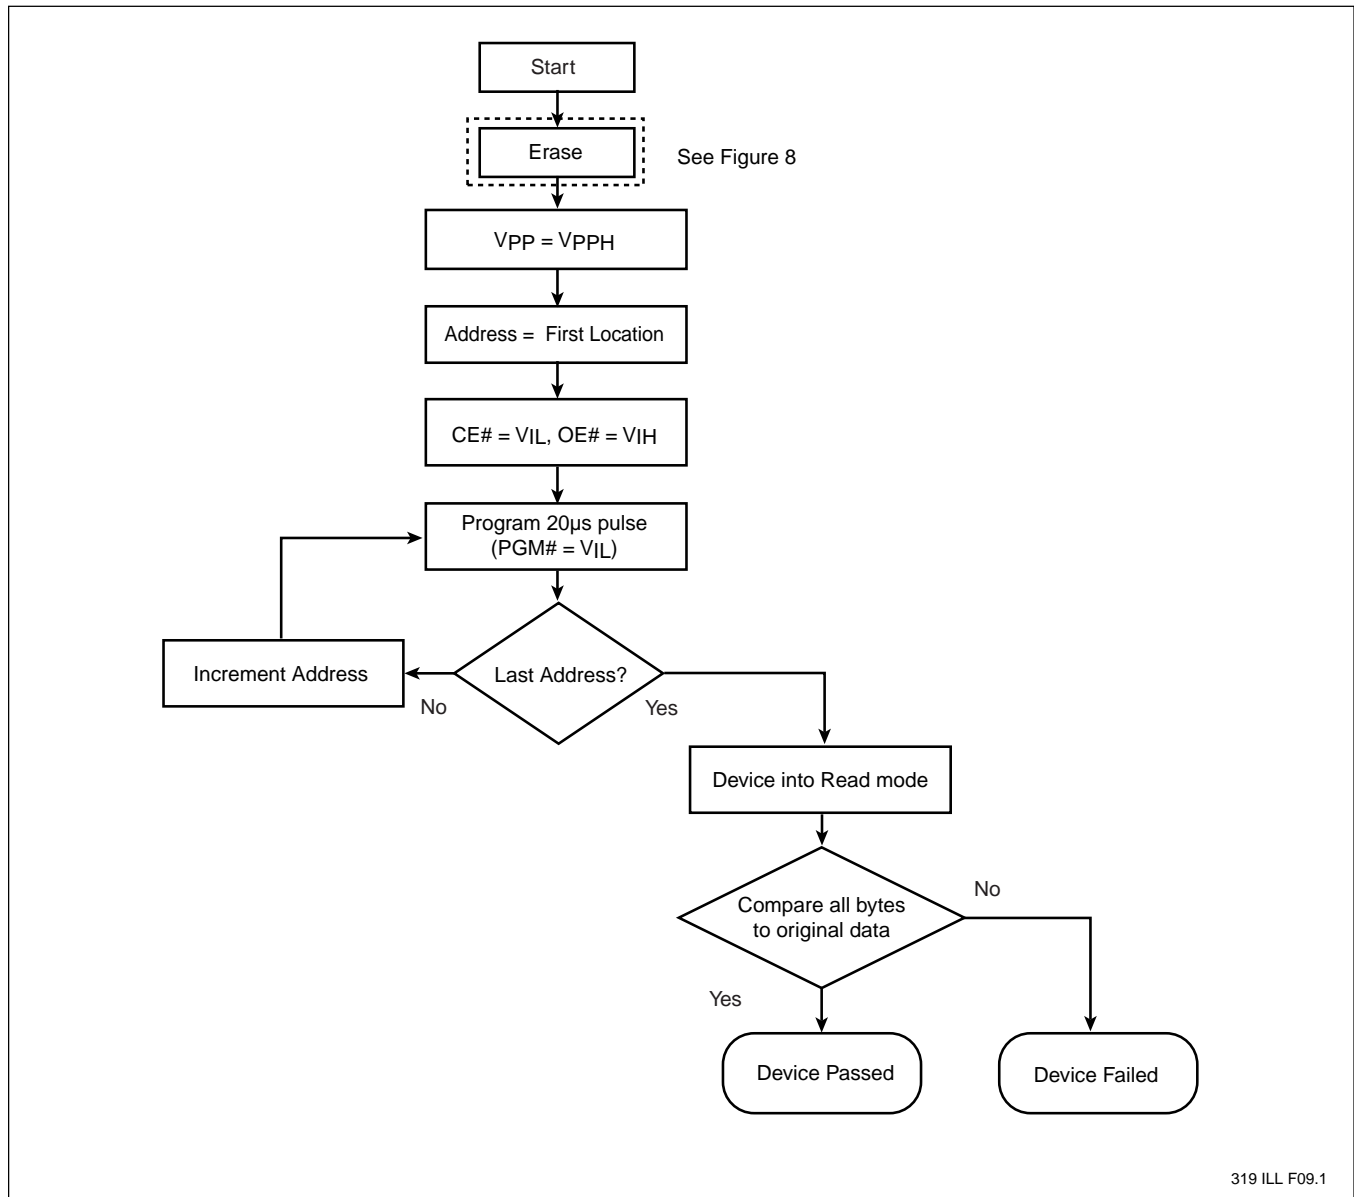

319 ILL F09.1

FIGURE 9: PROGRAMMING ALGORITHM




2 Megabit SuperFlash MTP SST27SF020, SST27VF020

Preliminary Specifications

PRODUCT ORDERING INFORMATION

Device **Speed** **Suffix1** **Suffix2**

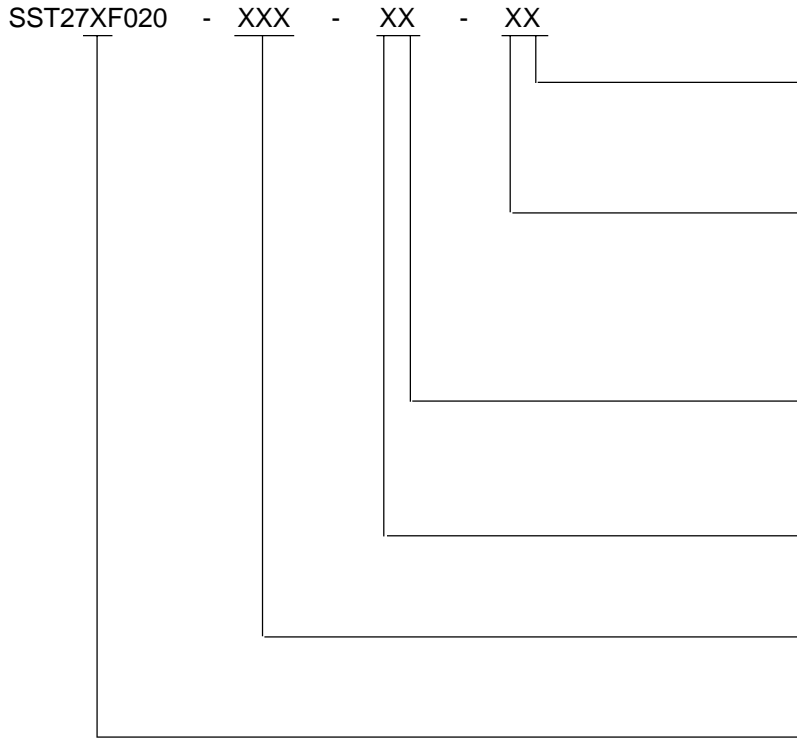

Package Modifier

H = 32 leads
Numeric = Die modifier

Package Type

P = PDIP
N = PLCC
E = TSOP (die up)
U = Unencapsulated die

Operating Temperature

C = Commercial = 0° to 70°C
I = Industrial = -40° to 85°C

Minimum Endurance

3 = 1000 cycles

Read Access Speed

90 = 90 ns, 120 = 120 ns
200 = 200 ns, 250 = 250 ns

Read Voltage

S = 5.0 Volt Read
V = 2.7 Volt Read (2.7-3.6V)



2 Megabit SuperFlash MTP SST27SF020, SST27VF020

Preliminary Specifications

27SF020 Valid combinations

SST27SF020- 90-3C-EH	SST27SF020- 90-3C-NH	SST27SF020- 90-3C-PH
SST27SF020- 120-3C-EH	SST27SF020- 120-3C-NH	SST27SF020- 120-3C-PH

SST27SF020- 90-3I-EH	SST27SF020- 90-3I-NH	
SST27SF020- 120-3I-EH	SST27SF020- 120-3I-NH	SST27SF020- 120-3C-U1

27VF020 Valid combinations


SST27VF020- 200-3C-EH	SST27VF020- 200-3C-NH	SST27VF020- 200-3C-PH
SST27VF020- 250-3C-EH	SST27VF020- 250-3C-NH	SST27VF020- 250-3C-PH

SST27VF020- 200-3I-EH	SST27VF020- 200-3I-NH	SST27VF020-250-3C-U1
-----------------------	-----------------------	----------------------

Example: Valid combinations are those products in mass production or will be in mass production. Consult your SST sales representative to confirm availability of valid combinations and to determine availability of new combinations.




PACKAGING DIAGRAMS

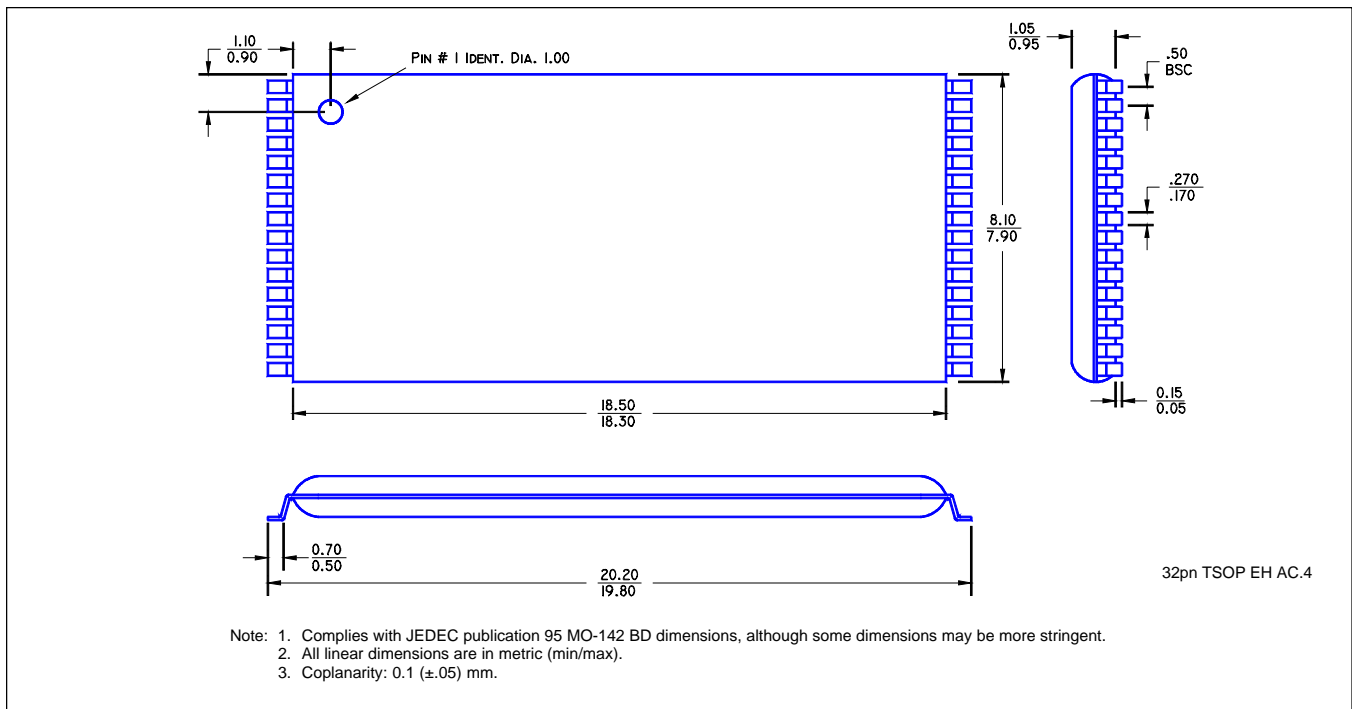

32-LEAD THIN SMALL OUTLINE PACKAGE (TSOP)

SST PACKAGE CODE: EH

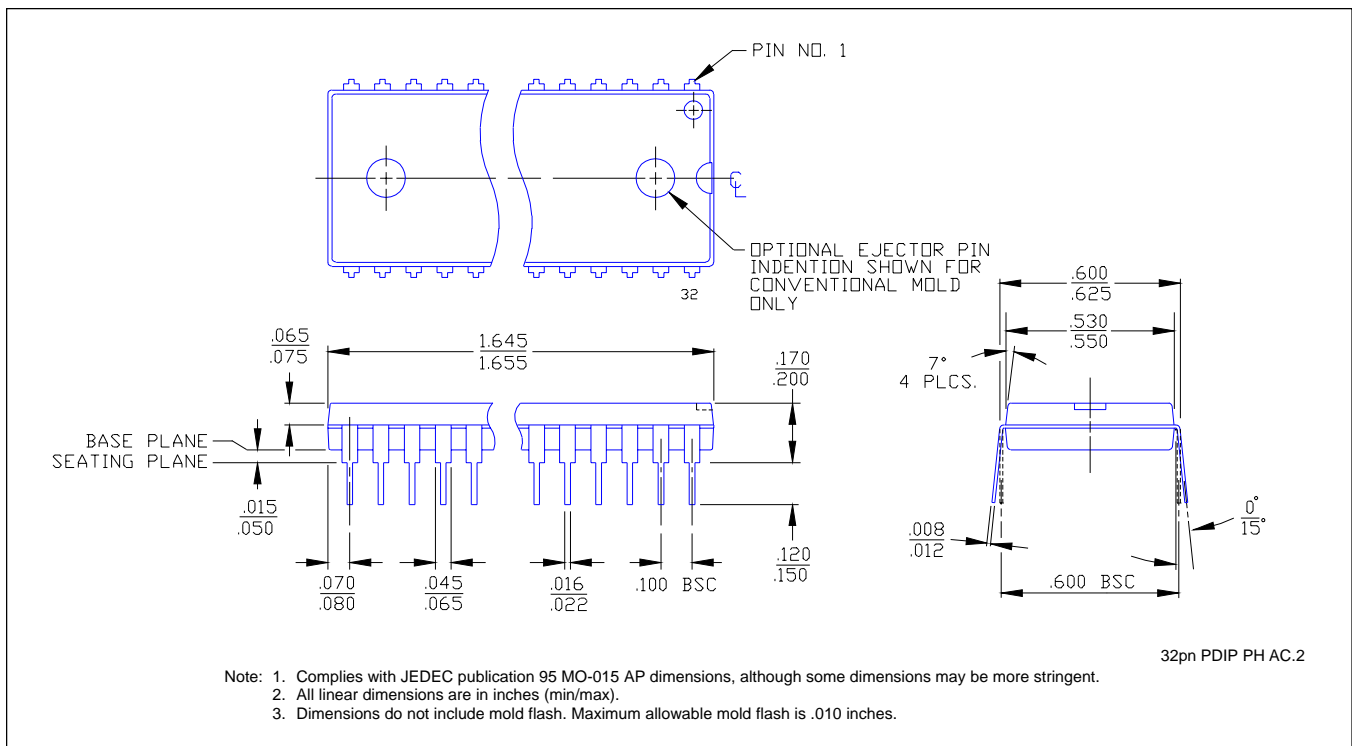


32-LEAD PLASTIC DUAL-IN-LINE PACKAGE (PDIP)

SST PACKAGE CODE: PH



2 Megabit SuperFlash MTP SST27SF020, SST27VF020

Preliminary Specifications

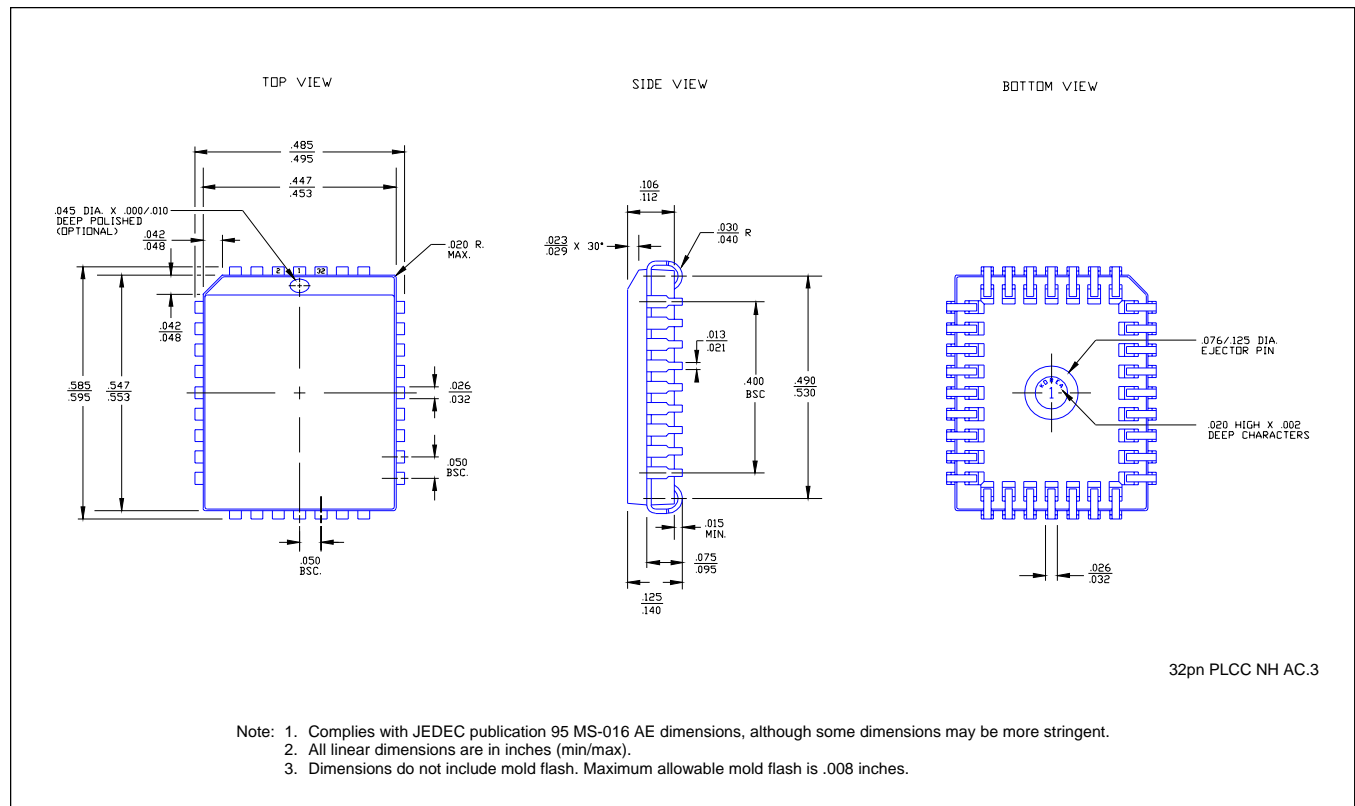

32-LEAD PLASTIC LEAD CHIP CARRIER (PLCC) SST PACKAGE CODE: NH