
#### **Features**

- AVR® Microcontroller-based Function Controller and Hub
- Binary-compatible with the AT43USB355
- Fully Programmable Full-Speed USB 2.0 Hub with Two External and One Attached Downstream Ports
- Full Speed USB Function with Four Endpoints
- High Performance and Low Power 12/24 MIPs AVR RISC Microcontroller
- 120 Powerful Instructions Most with 83/41.5 ns Execution Cycle Times
- 24 KB Masked ROM Program Memory
- 1 KB Internal Data SRAM
- 32 x 8 General-purpose Working Registers
- 15 Programmable I/O Port Pins
- 12-channel 10-bit Analog-to-Digital Converter (ADC)
- One 8-bit Timer/Counter with Separate Pre-scaler
- One 16-bit Timer/Counter with Separate Pre-scaler and Two PWMs
- External and Internal Interrupt Sources
- Programmable Watchdog Timer
- Low Power Suspend Mode
- 6 MHz Crystal Oscillator with PLL
- 5V Operation with On-chip 3.3V Regulators
- 48-lead LQFP Package



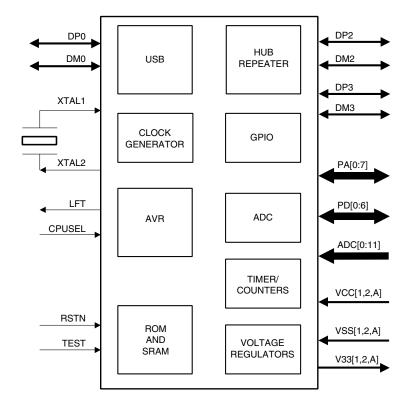

# Low Cost USB Microcontroller with Hub, ADC and PWM

### AT43USB353M

# **Summary**







#### Overview

The Atmel AT43USB353M is a full-speed USB AVR-based microcontroller with a full-speed USB 2.0 compliant embedded hub especially suitable for use in applications requiring Analog-to-Digital converters (ADCs) and PWMs such as in force feedback game controllers. The USB hub has 3 downstream ports, one of which is permanently attached to the USB function. The USB function controller has its own device address and endpoints. In game controller applications, the two external downstream USB ports can be used to connect other devices such as headphone sets for voice commands flash memory modules or any other USB device.

The MCU of the AT43USB353M is a high performance 8-bit AVR RISC that operates at a clock frequency of 12 MHz or 24 MHz. Its program memory is a 24-Kbyte mask programmable ROM and its data memory is 1-Kbyte SRAM. The ADC has a minimum conversion time of 12 ms that together with the 12 input channels should cover even the most demanding game controllers such as gamepads, joysticks and racing wheels. The two PWM outputs can be programmed for 8-, 9- or 10-bit resolution for applications requiring force feedback. The 15 general-purpose programmable I/O pins provide generous inputs for the various buttons and switches and LED indicators that are being used in increasing numbers in today's game controllers.

The USB function has one control endpoint and three additional programmable endpoints, each with their own FIFOs. Two of the endpoints have a 64-byte FIFO each, while the third has an 8-byte FIFO. The USB hardware supports the physical and link layers of the USB protocol while the transaction layer function must be implemented in the MCU's firmware. The AVR architecture was developed to be efficiently programmed in C and without loss in performance.

The AT43USB353M is binary-compatible with the AT43USB355. Firmware written for the AT43USB355 will run on the AT43USB353M without modification as long as only features common to both devices are used.

# Development Support

The AT43USB353M uses the same program and development tools as the AT43USB355 and other Atmel AVR microcontrollers including: C compilers, macro assemblers, program debuggers/simulators, in-circuit emulators. The development kit is the AT43DK355, which comes with USB firmware library and sample source code for the most common USB applications.

# **Ordering Information**

Program Memory	Ordering Code	Package	Operation Range
Mask ROM	AT43USB353M-AC	48 LQFP	Commercial
			(0°C to 70°C)


Package Type		
48AA	48-lead, 7 x 7 mm Body Size, Low Profile Plastic Quad Flat Package (LQFP)	





## **Packaging Information**

#### 48AA - LQFP

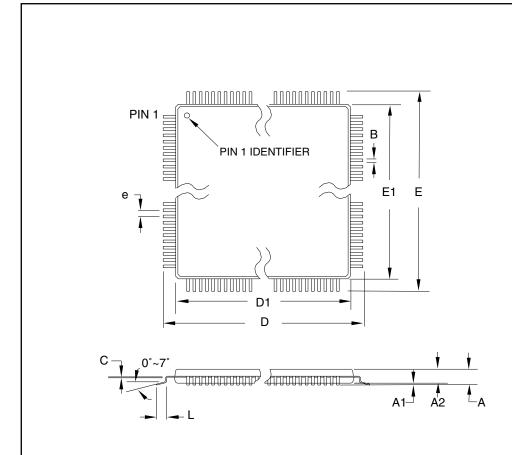

#### COMMON DIMENSIONS

(Unit of Measure = mm)

SYMBOL	MIN	NOM	MAX	NOTE
Α	_	_	1.60	
A1	0.05	_	0.15	
A2	1.35	1.40	1.45	
D	8.75	9.00	9.25	
D1	6.90	7.00	7.10	Note 2
E	8.75	9.00	9.25	
E1	6.90	7.00	7.10	Note 2
В	0.17	_	0.27	
С	0.09	_	0.20	
L	0.45	_	0.75	
е	0.50 TYP			

10/5/2001

Notes:

- 1. This package conforms to JEDEC reference MS-026, Variation BBC.
- Dimensions D1 and E1 do not include mold protrusion. Allowable protrusion is 0.25 mm per side. Dimensions D1 and E1 are maximum plastic body size dimensions including mold mismatch.
- 3. Lead coplanarity is 0.08 mm maximum.

4lmei	2325 Orchard Parkway San Jose, CA 95131
AIIIIEL	San Jose, CA 95131

TITLE
48AA, 48-lead, 7 x 7 mm Body Size, 1.4 mm Body Thickness,
0.5 mm Lead Pitch, Low Profile Plastic Quad Flat Package (LQFP

DRAWING NO.	REV.
48AA	С



#### **Atmel Headquarters**

Corporate Headquarters 2325 Orchard Parkway San Jose, CA 95131 TEL 1(408) 441-0311 FAX 1(408) 487-2600

#### Europe

Atmel Sarl Route des Arsenaux 41 Case Postale 80 CH-1705 Fribourg Switzerland TEL (41) 26-426-5555 FAX (41) 26-426-5500

#### Asia

Room 1219 Chinachem Golden Plaza 77 Mody Road Tsimshatsui East Kowloon Hong Kong TEL (852) 2721-9778 FAX (852) 2722-1369

#### Japan

9F, Tonetsu Shinkawa Bldg. 1-24-8 Shinkawa Chuo-ku, Tokyo 104-0033 Japan TEL (81) 3-3523-3551 FAX (81) 3-3523-7581

#### **Atmel Operations**

#### Memory

2325 Orchard Parkway San Jose, CA 95131 TEL 1(408) 441-0311 FAX 1(408) 436-4314

#### Microcontrollers

2325 Orchard Parkway San Jose, CA 95131 TEL 1(408) 441-0311 FAX 1(408) 436-4314

La Chantrerie BP 70602 44306 Nantes Cedex 3, France TEL (33) 2-40-18-18-18 FAX (33) 2-40-18-19-60

#### ASIC/ASSP/Smart Cards

Zone Industrielle 13106 Rousset Cedex, France TEL (33) 4-42-53-60-00 FAX (33) 4-42-53-60-01

1150 East Cheyenne Mtn. Blvd. Colorado Springs, CO 80906 TEL 1(719) 576-3300 FAX 1(719) 540-1759

Scottish Enterprise Technology Park Maxwell Building East Kilbride G75 0QR, Scotland TEL (44) 1355-803-000 FAX (44) 1355-242-743

#### RF/Automotive

Theresienstrasse 2 Postfach 3535 74025 Heilbronn, Germany TEL (49) 71-31-67-0 FAX (49) 71-31-67-2340

1150 East Cheyenne Mtn. Blvd. Colorado Springs, CO 80906 TEL 1(719) 576-3300 FAX 1(719) 540-1759

Biometrics/Imaging/Hi-Rel MPU/ High Speed Converters/RF Datacom Avenue de Rochepleine BP 123 38521 Saint-Egreve Cedex, France TEL (33) 4-76-58-30-00 FAX (33) 4-76-58-34-80

e-mail
literature@atmel.com

Web Site http://www.atmel.com

#### © Atmel Corporation 2003.

Atmel Corporation makes no warranty for the use of its products, other than those expressly contained in the Company's standard warranty which is detailed in Atmel's Terms and Conditions located on the Company's web site. The Company assumes no responsibility for any errors which may appear in this document, reserves the right to change devices or specifications detailed herein at any time without notice, and does not make any commitment to update the information contained herein. No licenses to patents or other intellectual property of Atmel are granted by the Company in connection with the sale of Atmel products, expressly or by implication. Atmel's products are not authorized for use as critical components in life support devices or systems.

Atmel® and AVR® are the registered trademarks of Atmel.

Other terms and product names may be the trademarks of others.

