

ELECTRICAL SPECIFICATIONS:

NOTES

1.0 TURNS RATIO: (P6-P5-P4) : (J6-J3) (P3-P2-P1) : (J2-J1)

: 1CT : 1CT± 3% : 1CT : 1.41CT ± 3% 1.0 PINS WITHOUT ELECTRICAL CONNECTION ARE OMITTED.

2.0 INDUCTANCE: (P6-P4)

(P3-P1)

: 350uH MIN. @ 0.1V, 100KHz, 8mA DC Bias : 350uH MIN. @ 0.1V, 100KHz, 8mA DC Bias

3.0 LEAKAGE INDUCTANCE: P6-P4 (WITH J6 AND J3 SHORT)

P3-P1 (WITH J2 AND J1 SHORT)

: 0.3uH MAX. @ 1MHz : 0.3uH MAX. @ 1MHz

4.0 INTERWINDING CAPACITANCE: (P6,P5,P4) TO (J6,J3) (P3,P2,P1) TO (J2,J1)

: 30pf TYP. @ 1MHz : 30pf TYP. @ 1MHZ

5.0 DC RESISTANCE: (J6-J3)=(J2-J1)

: 1.2 ohms Max.

Bel Stewart Connector 11118 Susquehanna Trail, South Glen Rock, Pa 17327-9199

http://www.stewartconnector.com

SHEET 1 OF 4

717.234.7512

DRAWING NO.

SI - 40256

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND PROPERTY OF BEL STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONTENT OF BEL STEWART CONNECTOR. THE SUBJECT MATTER MAY BE PATENTED OR A PATENT MAY BE PENDING.

6.0 RETURN LOSS: 1MHz TO 30MHz 60MHz TO 80MHz NOTE: 100 OHMS CONNECTED TO (J2-J1) OR (J6-J3).	RECEIVE : 18dB MIN. : 12dB MIN.	TRANSMIT 12dB MIN.
7.0 DIELECTRIC WITHSTAND: (J1, J2) TO (P1, P3) (J3, J6) TO (P4,P6)	: 1500 VAC : 1500 VAC	1500 VAC 1500 VAC
8.0 INSERTION LOSS: RS=RL=100 ohms 100KHz TO 100MHz	: 1.1 dB TYP	1.1 dB TYP
9.0 RISE TIME: RS=100 OHMS AND RL = 100 OHMS OUTPUT VOLTAGE = 1 V peak PULSE WIDTH= 112nS	: 3.0 nS MAX : 3.0 nS MAX	3.0 nS MAX 3.0 nS MAX
10.0 CROSS TALK: 1MHz TO 100MHz	: 40 dB TYP	40 dB TYP
11.0 COMMON TO COMMON MODE ATTENUATION: 30MHz TO 100MHz	: 35dB TYP	35dB TYP


Bel Stewart Connector 11118 Susquehanna Trail, South Glen Rock, Pa 17327-9199 717.234.7512 MagJack

 ${\bf http://www.stewartconnector.com}$

TEWART SHEET 2 OF 4


DRAWING NO.

SI-40256 REV.C





LED SPECIFICATION			
STANDARD LED	WAVELENGTH	* Forward V (MAX)	(TYP)
GREEN	565 nm	2.5 V	2.1 V

*WITH A FORWARD CURRENT OF 20 mA



CT720034X1/24-0168

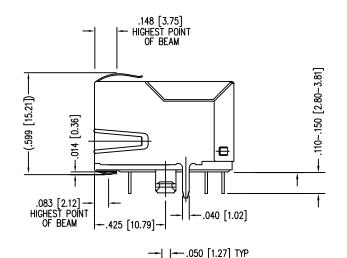

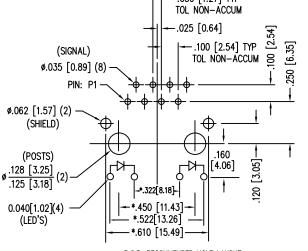

P.C.B. RECOMMENDED HOLE LAYOUT SEEN FROM COMPONENT SIDE TOLERANCE ±.003 [0.08] UNLESS OTHERWISE SPECIFIED

NOTES:

1. CONNECTOR MATERIALS:

HOUSING: THERMOPLASTIC UL94 V-0

CONTACT/SHIELD: COPPER ALLOY

CONTACT PLATING: SELECTIVE GOLD.

SHIELD PLATING: NICKEL OR TIN

DRAWING NO.

REV.

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND PROPERTY OF BEL STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONTENT OF BEL STEWART CONNECTOR. THE SUBJECT MATTER MAY BE PATENTED OR A PATENT MAY BE PENDING.

SEE ELECTRICAL DRAWING FOR OMITTED PINS. 3. TOLERANCES COMPLY WITH F.C.C. DIMENSION REQUIREMENTS. 4. THE SUGGESTED PANEL OPENING IS INTENDED TO GIVE

2. PIN NOT ELECTRICALLY CONNECTED MAYBE OMITTED.

50 MICRO-INCHES MIN. IN CONTACT AREA.

CLEARANCES, YET MAINTAIN GROUNDING CAPABILITY. 5. WAVE SOLDER COMPATIBLE - PREHEAT 125°C/90SECS.

USER THE ABILITY TO HAVE REASONABLE JACK/PANEL


Bel Stewart Connector 11118 Susquehanna Trail, South


SHEET

3 OF 4

MagJack Glen Rock, Pa 17327-9199 717.234.7512

http://www.stewartconnector.com



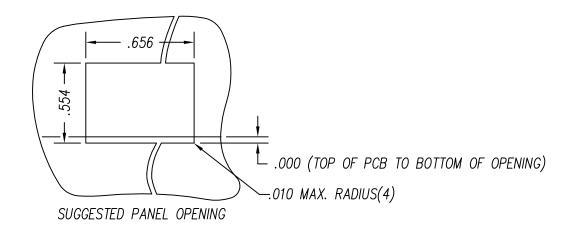

CT720034X1/24-0168

Bel Stewart Connector 11118 Susquehanna Trail, South Glen Rock, Pa 17327-9199 MagJack*

http://www.stewartconnector.com

SHEET 4 OF 4

717.234.7512

DRAWING NO.

SI-40256 REV.O