




## OUTLINE DIMENSION & 🤖 風迹 東 电话: 020-33819057 /www.lcdfriends.com



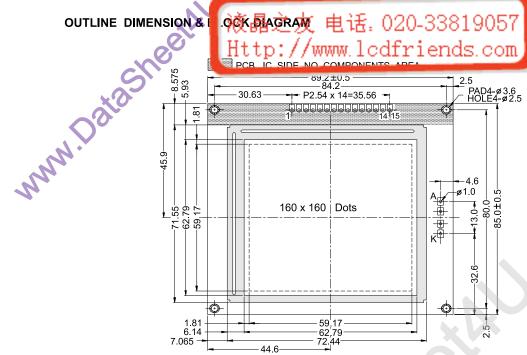

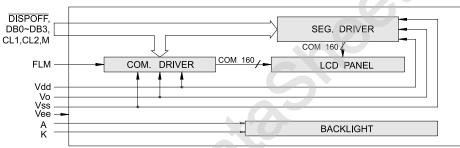



The tolerance unless classified ± 0.3mm

| MECHANICAL SPECIFICATION |               |          |            |  |  |  |  |  |
|--------------------------|---------------|----------|------------|--|--|--|--|--|
| Overall Size             | 89.2 x 85.0   | Module   | H2 / H1    |  |  |  |  |  |
| View Area                | 62.79 x 62.79 | W /O B/L | - / -      |  |  |  |  |  |
| Dot Size                 | 0.34 x 0.34   | EL B/L   | - / -      |  |  |  |  |  |
| Dot Pitch                | 0.37 x 0.37   | LED B/L  | 9.4 / 13.5 |  |  |  |  |  |

| PIN ASSIGNMENT |         |                              |  |  |  |
|----------------|---------|------------------------------|--|--|--|
| Pin no.        | Symbol  | Function                     |  |  |  |
| 1              | Vss     | Power supply (GND)           |  |  |  |
| 2              | М       | Alternation control signal   |  |  |  |
| 3              | FLM     | Shift direction select       |  |  |  |
| 4              | CL1     | Display data input clock     |  |  |  |
| 5              | CL2     | Display data input clock     |  |  |  |
| 6              | DB3     | Data bus line                |  |  |  |
| 7              | DB2     | Data bus line                |  |  |  |
| 8              | DB1     | Data bus line                |  |  |  |
| 9              | DB0     | Data bus line                |  |  |  |
| 10             | Vee     | Negative voltage Input       |  |  |  |
| 11             | Vdd     | Power supply (+)             |  |  |  |
| 12             | Vo      | Contrast Adjust              |  |  |  |
| 13             | DISPOFF | Data bus line                |  |  |  |
| 14             | Α       | Power supply for LED B/L (-) |  |  |  |
| 15             | K       | Power supply for LED B/L (+) |  |  |  |

| ABSOLUTE MAXIMUM RATING          |           |       |           |      |            |         |      |         |     |       |
|----------------------------------|-----------|-------|-----------|------|------------|---------|------|---------|-----|-------|
| Item                             | Symbo     | ы С   | Condition |      | Min.       |         |      | Max.    |     | Units |
| Supply for logic voltage         | Vdd-Vss   |       | 25°C      |      | -0.3       |         |      | 7.0     |     | V     |
| LCD driving supply voltage       | Vdd-Ve    | ее    | 25°C      |      | 0          |         |      | 30.0    |     | V     |
| Input voltage                    | Vin       |       | 25°C -    |      | <b>-</b> 0 | -0.3    |      | Vdd+0,3 |     | V     |
| ELECTRICAL CHARACTERISTICS       |           |       |           |      |            |         |      |         |     |       |
| Item                             | Symbol Co |       | dition    | Min. |            | Typical |      | M       | ax. | Units |
| Power supply voltage             | Vdd-Vss   | 25    | 25°C      |      | 4.5        |         |      |         | 5   | V     |
| LCD operation voltage            | Vop       | T     | Тор       |      | W          | N       | W    | N       | W   | V     |
|                                  |           | -20   | Oo        | _    | -(         | 3       | 1    | _       | -   | V     |
|                                  |           | 0,    | oC .      | -    | .0         | 7       | _    | _       | _   | V     |
|                                  |           | 25    | °C        | 7    | 1          | _       | 18.3 | _       | _   | V     |
|                                  |           | 50    | 50°C      |      | <i>r_</i>  | _       | _    | _       | _   | V     |
|                                  |           | 70    | °C        | /_   | _          | _       | _    | _       | _   | V     |
| LCM current consumption (No B/L) | Idd       | Vdc   | I=5V      | _    |            | 3       |      | 5       |     | mA    |
| Darliight account and a second   | LED/edge  | VB/L  | =4.2V     | T -  |            |         |      | _       |     | mA    |
| Backlight current consumption    | LED/array | VB/L= | =4.2V     |      |            | 500     |      |         |     | mA    |