

---

# 2SD755, 2SD756, 2SD756A

Silicon NPN Epitaxial


# HITACHI

---

## Application

- Low frequency high voltage amplifier
- Complementary pair with 2SB715, 2SB716 and 2SB716A

## Outline

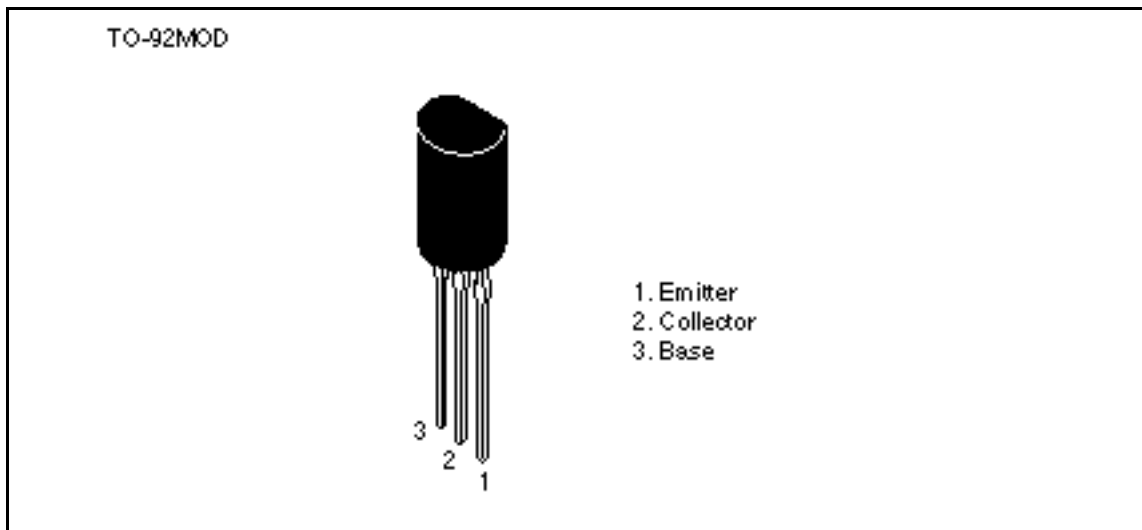

## 2SD755, 2SD756, 2SD756A

### Absolute Maximum Ratings (Ta = 25°C)


Item	Symbol	2SD755	2SD756	2SD756A	Unit
Collector to base voltage	$V_{CBO}$	100	120	140	V
Collector to emitter voltage	$V_{CEO}$	100	120	140	V
Emitter to base voltage	$V_{EBO}$	5	5	5	V
Collector current	$I_C$	50	50	50	mA
Collector power dissipation	$P_C$	750	750	750	mW
Junction temperature	$T_J$	150	150	150	°C
Storage temperature	$T_{stg}$	-55 to +150	-55 to +150	-55 to +150	°C

### Electrical Characteristics (Ta = 25°C)


Item	Symbol	2SD755			2SD756			2SD756A			Unit	Test conditions
		Min	Typ	Max	Min	Typ	Max	Min	Typ	Max		
Collector to emitter breakdown voltage	$V_{(BR)CEO}$	100	—	—	120	—	—	140	—	—	V	$I_C = 1 \text{ mA}$ , $R_{BE} =$
Collector to base breakdown voltage	$V_{(BR)CBO}$	100	—	—	120	—	—	140	—	—	V	$I_C = 10 \text{ } \mu\text{A}$ , $I_E = 0$
Collector cutoff current	$I_{CBO}$	—	—	0.5	—	—	0.5	—	—	0.5	$\mu\text{A}$	$V_{CB} = 100 \text{ V}$ , $I_E = 0$
DC current transfer ratio	$h_{FE1}^{*1}$	250	—	1200	250	—	800	250	—	500		$V_{CE} = 12 \text{ V}$ , $I_C = 2 \text{ mA}$
	$h_{FE2}$	125	—	—	125	—	—	125	—	—		$V_{CE} = 12 \text{ V}$ , $I_C = 10 \text{ mA}$
Base to emitter voltage	$V_{BE}$	—	—	0.75	—	—	0.75	—	—	0.75	V	$V_{CE} = 12 \text{ V}$ , $I_C = 2 \text{ mA}$
Collector to emitter saturation voltage	$V_{CE(sat)}$	—	—	0.2	—	—	0.2	—	—	0.2	V	$I_C = 10 \text{ mA}$ , $I_B = 1 \text{ mA}$
Gain bandwidth product	$f_T$	—	350	—	—	350	—	—	350	—	MHz	$V_{CE} = 12 \text{ V}$ , $I_C = 5 \text{ mA}$
Collector output capacitance	$C_{ob}$	—	1.6	—	—	1.6	—	—	1.6	—	pF	$V_{CB} = 25 \text{ V}$ , $I_E = 0$ , $f = 1 \text{ MHz}$

Note: 1. The 2SD755, 2SD756 and 2SD756A are grouped by  $h_{FE1}$  as follows.

	D	E	F
2SD755	250 to 500	400 to 800	600 to 1200
2SD756	250 to 500	400 to 800	—
2SD756A	250 to 500	—	—

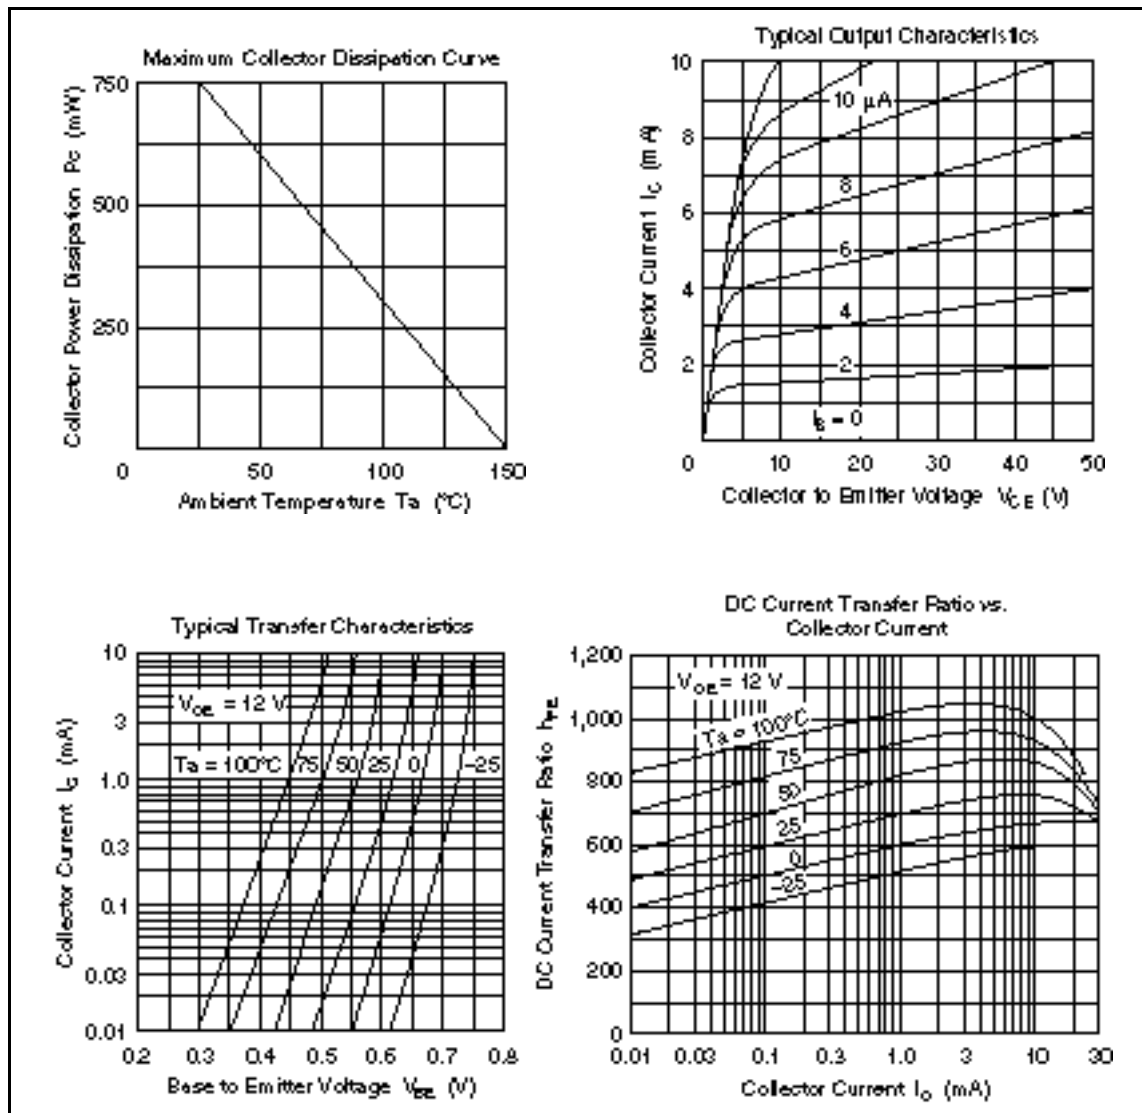

## 2SD755, 2SD756, 2SD756A

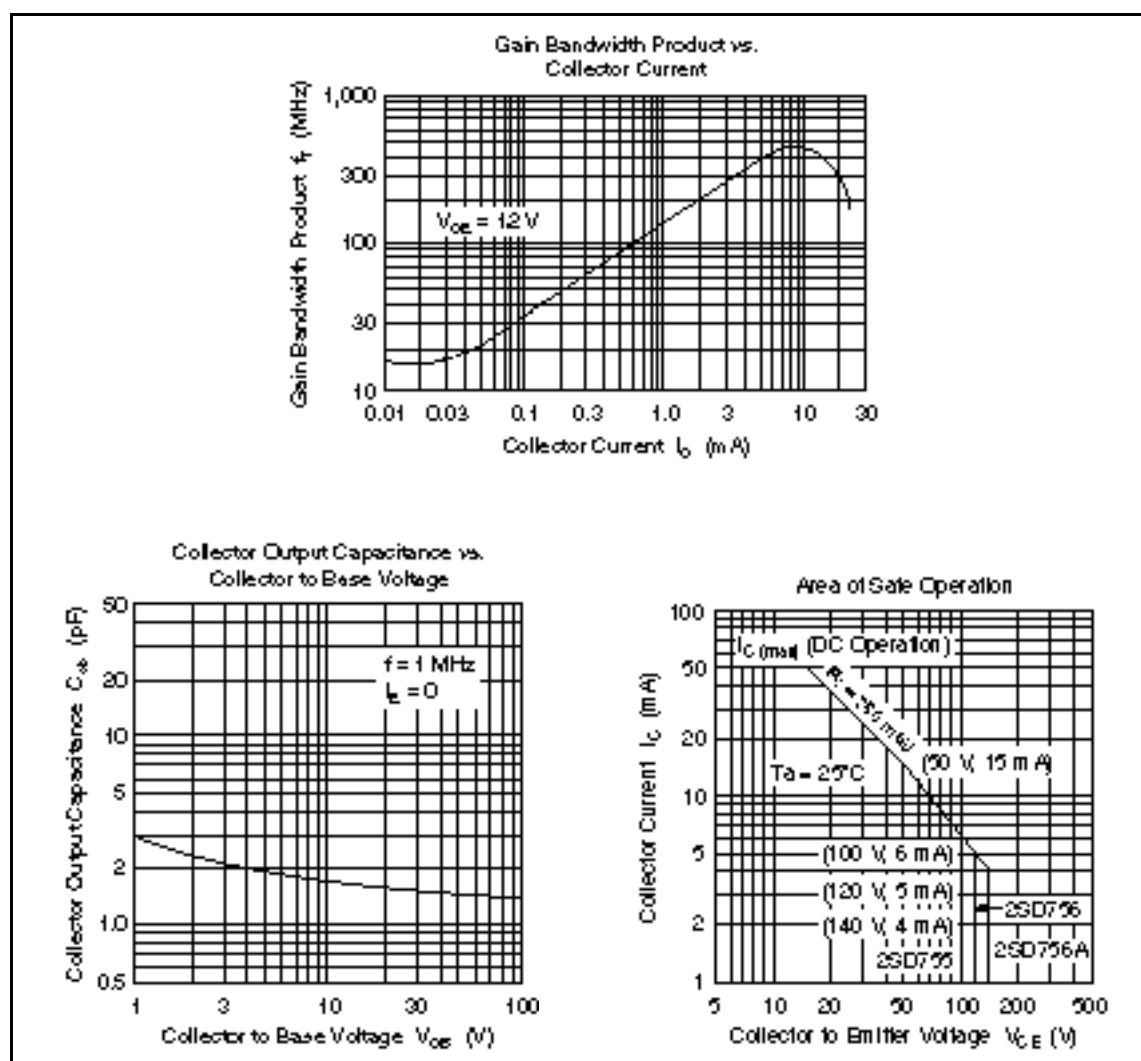

**HITACHI**

When using this document, keep the following in mind:

1. This document may, wholly or partially, be subject to change without notice.
2. All rights are reserved: No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without Hitachi's permission.
3. Hitachi will not be held responsible for any damage to the user that may result from accidents or any other reasons during operation of the user's unit according to this document.
4. Circuitry and other examples described herein are meant merely to indicate the characteristics and performance of Hitachi's semiconductor products. Hitachi assumes no responsibility for any intellectual property claims or other problems that may result from applications based on the examples described herein.
5. No license is granted by implication or otherwise under any patents or other rights of any third party or Hitachi, Ltd.
6. **MEDICAL APPLICATIONS:** Hitachi's products are not authorized for use in **MEDICAL APPLICATIONS** without the written consent of the appropriate officer of Hitachi's sales company. Such use includes, but is not limited to, use in life support systems. Buyers of Hitachi's products are requested to notify the relevant Hitachi sales offices when planning to use the products in **MEDICAL APPLICATIONS**.

---

# HITACHI

## **Hitachi, Ltd.**

Semiconductor & IC Div.

Nippon Bldg., 2-6-2, Ohite-machi, Chiyoda-ku, Tokyo 100, Japan

Tel: Tokyo (03) 3270-2111

Fax: (03) 3270-5109

For further information write to:

**Hitachi America, Ltd.**

Semiconductor & IC Div.

2000 Sierra Point Parkway

Brisbane, CA 94005-4835

U.S.A.

Tel: 415-589-8000

Fax: 415-589-4207

**Hitachi Europe GmbH**

Electronic Components Group

Continental Europe

Dornacher Straße 3

D-85622 Feldkirchen

München

Tel: 089-9 94 80-0

Fax: 089-9 29 30 00

**Hitachi Europe Ltd.**

Electronic Components Div.

Northern Europe Headquarters

Whitebrook Park

Lower Cookham Road

Maidenhead

Berkshire SL6 8YA

United Kingdom

Tel: 0628-585000

Fax: 0628-778322

**Hitachi Asia Pte. Ltd.**

45 Collyer Quay #20-00

Hitachi Tower

Singapore 0104

Tel: 535-2100

Fax: 535-1533

**Hitachi Asia (Hong Kong) Ltd.**

Unit 705, North Tower,

World Finance Centre

Harbour City, Canton Road

Tsim Sha Tsui, Kowloon

Hong Kong

Tel: 27359218

Fax: 27306074