


# BAV19WS - BAV21WS



## SURFACE MOUNT FAST SWITCHING DIODE

### **Features**

- High Conductance
- Fast Switching Speed
- Surface Mount Package Ideally Suited for Automatic Insertion
- For General Purpose Switching Application
- Plastic Material UL Recognition Flammability Classification 94V-O



SOD-323					
Dim	Min	Max			
Α	2.30	2.70			
В	1.75	1.95			
С	1.15	1.35			
D	0.25	0.35			
Е	0.05	0.15			
G	0.70	0.95			
Н	0.30				
All Dimensions in mm					

## **Mechanical Data**

Case: SOD-323, Molded Plastic

 Terminals: Plated Leads Solderable per MIL-STD-202, Method 208

Polarity: Cathode Band

• Weight: 0.004 grams (approx.)

• Marking: BAV19WS A8

BAV20WS A80 BAV21WS A82

Lead Free: For RoHS / Lead Free Version,
Add "-LF" Suffix to Part Number, See Page 4

## $\begin{tabular}{ll} \textbf{Maximum Ratings} & @T_A = 25^{\circ}C \ unless \ otherwise \ specified \end{tabular}$


Characteristic	Symbol	BAV19WS	BAV20WS	BAV21WS	Unit	
Non-Repetitive Peak Reverse Voltage		VRM	120	200	250	V
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage		VRRM VRWM VR	100	150	200	V
RMS Reverse Voltage	VR(RMS)	70	105	140	V	
Forward Continuous Current (Note 1)		lF	400		mA	
Average Rectified Output Current (Note 1)		lo	200		mA	
Non-Repetitive Peak Forward Surge Current @ t = 1.0µs @ t = 1.0s		IFSM	2.5 0.5		А	
Power Dissipation		Pd	200		mW	
Typical Thermal Resistance, Junction to Ambie	$R_{ heta}$ JA	625			K/W	
Operating and Storage Temperature Range	Tj, Tstg	-65 to +150			°C	

## Electrical Characteristics @TA=25°C unless otherwise specified

Characteristic		Symbol	BAV19WS	BAV20WS	BAV21WS	Unit
Forward Voltage Drop	@ IF = 100mA	VFM		1.0		V
Peak Reverse Leakage Current @ Rated DC Blocking Voltage		lгм	100			nA
Typical Junction Capacitance (VR = 0V DC, f = 1.0MHz)		Cj	5.0		pF	
Reverse Recovery Time (Note 2)		trr	50		nS	

Note: 1. Valid provided that terminals are kept at ambient temperature.

2. Measured with IF = IR = 30mA, IRR = 0.1 x IR, RL =  $100 \Omega$ .

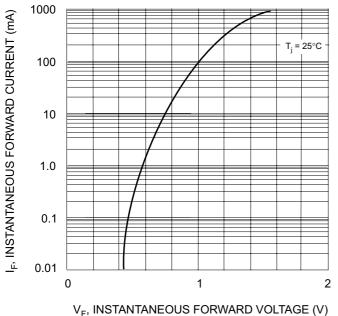


100 (ip) 10 (ip) 0.1 0 100 200

NSTANTANEOUS FORWARD VOLTAGE (V) Fig. 1 Forward Characteristics


 $\label{eq:total_total_total} \textbf{T}_{j}, \, \text{JUNCTION TEMPERATURE (°C)} \\ \text{Fig. 2 Leakage Current vs Junction Temperature} \\$ 

## **MARKING INFORMATION**

## **RECOMMENDED FOOTPRINT**

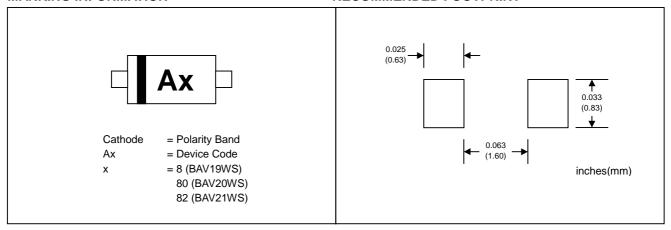

### **PACKAGING INFORMATION**

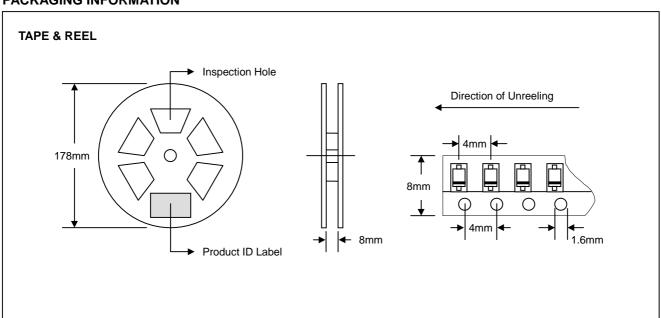

Reel Diameter (mm)	Quantity (PCS)	Inner Box Size L x W x H (mm)	Quantity (PCS)	Carton Size L x W x H (mm)	Quantity (PCS)	Approx. Gross Weight (KG)
178	5,000	187 x 187 x 65	25,000	390 x 240 x 420	250,000	10.0

Note: 1. Anti-static plastic reel, white, water clear or blue color. Inspection hole might be varied in different alignment.

2. Components are packed in accordance with EIA standard 481-1 and 481-2.

#### **ORDERING INFORMATION**

Product No.	Package Type	Shipping Quantity		
BAV19WS-T1	SOD-323	5000/Tape & Reel		
BAV20WS-T1	SOD-323	5000/Tape & Reel		
BAV21WS-T1	SOD-323	5000/Tape & Reel		

- Shipping quantity given is for minimum packing quantity only. For minimum order quantity, please consult the Sales Department.
- To order RoHS / Lead Free version (with Lead Free finish), add "-LF" suffix to part number above. For example, BAV19WS-T1-LF.

Won-Top Electronics Co., Ltd (WTE) has checked all information carefully and believes it to be correct and accurate. However, WTE cannot assume any responsibility for inaccuracies. Furthermore, this information does not give the purchaser of semiconductor devices any license under patent rights to manufacturer. WTE reserves the right to change any or all information herein without further notice.

**WARNING**: DO NOT USE IN LIFE SUPPORT EQUIPMENT. WTE power semiconductor products are not authorized for use as critical components in life support devices or systems without the express written approval.

Won-Top Electronics Co., Ltd.

No. 44 Yu Kang North 3rd Road, Chine Chen Dist., Kaohsiung, Taiwan

**Phone:** 886-7-822-5408 or 886-7-822-5410

Fax: 886-7-822-5417 Email: sales@wontop.com Internet: http://www.wontop.com

We power your everyday.