



Zener Diode

unit : mm

Applications

- Constant voltage regulation
- Reference voltage application


Features

- Dual chip in one package
- Small and compact SMD package used: SOT-23
- Zener voltage: V_z=6.8V Typ.

Ordering Information

Type NO.	Marking	Package Code
SDZ6V8WA	Τ4	SOT-23

Outline Dimensions

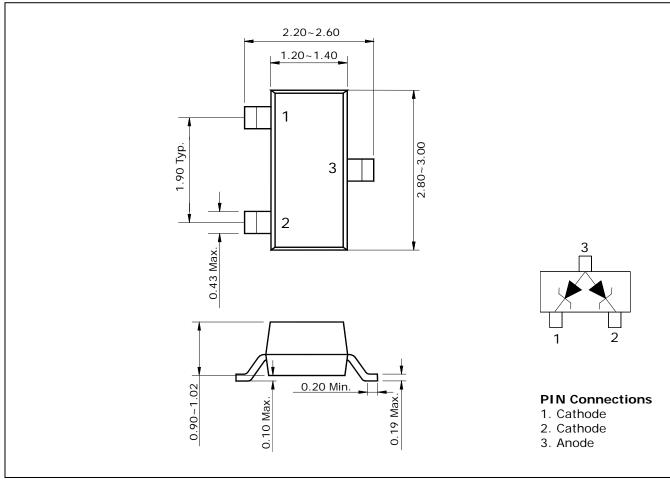

SDZ6V8WA


Absolute Maximum Ratings

Absolute Maximum Ratings	(Ta=25°C)			
Characteristic	Symbol	Rating	Unit	
Power dissipation	P _D	200	mW	
Junction temperature	TJ	150	°C	
Storage temperature range	T _{STG}	-55~150	°C	

Electrical Characteristics

Electrical Characteristics (Ta=25°C)							
Characteristic	Symbol	Test Condition	Min.	Тур.	Max.	Unit	
Zener voltage	Vz	I _Z =5mA	6.50	-	7.10	V	
Dynamic impedance	Z _{ZT}	I _Z =5mA	-	-	8	Ω	
KNEE dynamic impedance	Z _{ZK}	I _Z =0.25mA	-	-	750	Ω	
Reverse current	I _R	V _R =5.2V	-	-	1	μA	

* Recommend PCB solder land (Unit : mm)





Electrical Characteristic Curves

SDZ6V8WA

Fig. 1 P_D.T_a

Fig. 2 $I_Z V_Z$

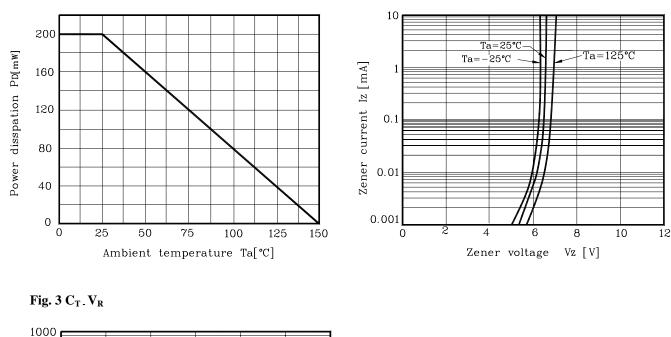

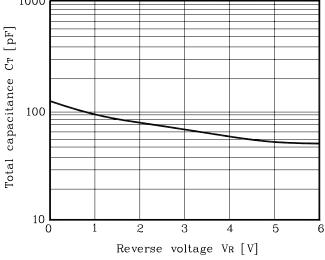

The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..

Specifications mentioned in this publication are subject to change without notice.