

# Monolithic Dual Switching Diode


## Common Cathode

- Pb-Free Package is Available.

### MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ )


Rating	Symbol	Max	Unit
Reverse Voltage	$V_R$	70	Vdc
Forward Current	$I_F$	200	mAdc
Peak Forward Surge Current	$I_{F(\text{surge})}$	500	mAdc

**LBAV70LT1**

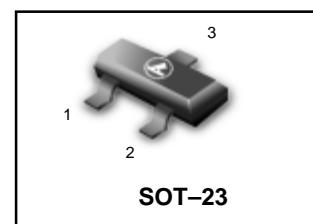

### THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Total Device Dissipation FR-5 Board <sup>(1)</sup>	$P_D$	225	mW
$T_A = 25^\circ\text{C}$			
Derate above $25^\circ\text{C}$		1.8	mW/ $^\circ\text{C}$
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	556	$^\circ\text{C}/\text{W}$
Total Device Dissipation	$P_D$	300	mW
Alumina Substrate <sup>(2)</sup> $T_A = 25^\circ\text{C}$			
Derate above $25^\circ\text{C}$		2.4	mW/ $^\circ\text{C}$
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	417	$^\circ\text{C}/\text{W}$
Junction and Storage Temperature	$T_J, T_{stg}$	-55 to +150	$^\circ\text{C}$

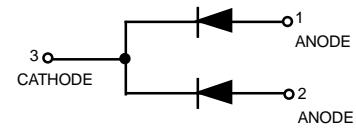

### DEVICE MARKING

LBAV70LT1 = A4

### ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)


Characteristic	Symbol	Min	Max	Unit
<b>OFF CHARACTERISTICS</b>				
Reverse Breakdown Voltage ( $I_{(BR)} = 100 \mu\text{Adc}$ )	$V_{(BR)}$	70	—	Vdc
Reverse Voltage Leakage Current ( $V_R = 25 \text{ Vdc}, T_J=150^\circ\text{C}$ )	$I_R$	—	60	$\mu\text{Adc}$
( $V_R = 70 \text{ Vdc}$ )		—	2.5	
( $V_R = 70 \text{ Vdc}, T_J=150^\circ\text{C}$ )		—	100	
Diode Capacitance ( $V_R = 0, f = 1.0 \text{ MHz}$ )	$C_D$	—	1.5	pF
Forward Voltage ( $I_F = 1.0 \text{ mAdc}$ )	$V_F$	—	715	mVdc
( $I_F = 10 \text{ mAdc}$ )		—	855	
( $I_F = 50 \text{ mAdc}$ )		—	1000	
( $I_F = 150 \text{ mAdc}$ )		—	1250	
Reverse Recovery Time $R_L=100\Omega$ ( $I_F= I_R=10 \text{ mAdc}, VR=5.0\text{Vdc}, I_{R(\text{REC})}= 1.0 \text{ mAdc}$ ) (Figure 1)	$t_{rr}$	—	6.0	ns

1. FR-5 =  $1.0 \times 0.75 \times 0.062$  in.

2. Alumina =  $0.4 \times 0.3 \times 0.024$  in. 99.5% alumina.

### ORDERING INFORMATION


Device	Marking	Shipping
LBAV70LT1	A4	3000 Tape & Reel
LBAV70LT1G	A4(Pb-Free)	3000 Tape & Reel

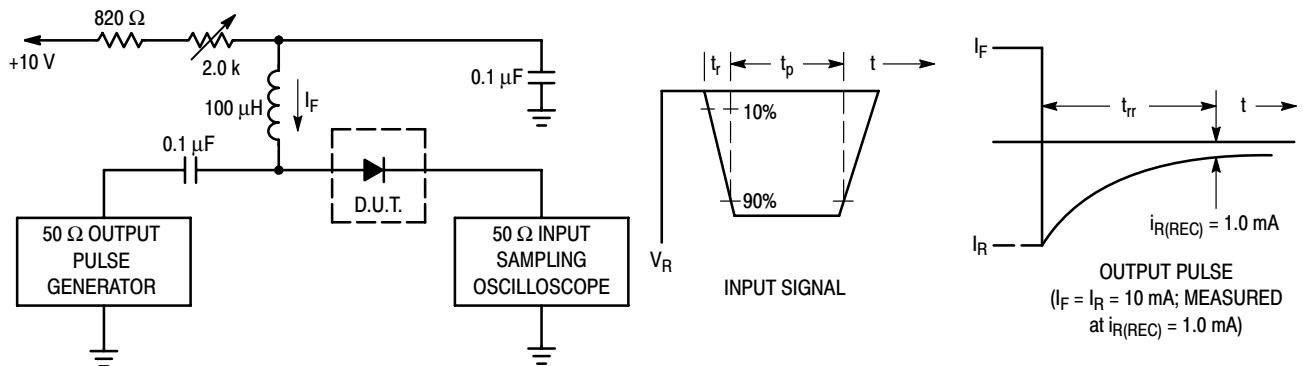**LBAV70LT1**


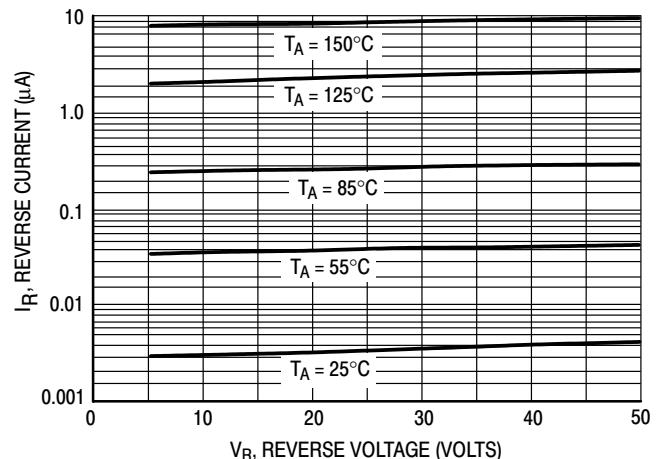
- Notes:
1. A 2.0 kΩ variable resistor adjusted for a Forward Current ( $I_F$ ) of 10 mA.
  2. Input pulse is adjusted so  $I_{R(\text{peak})}$  is equal to 10 mA.
  3.  $t_p \gg t_{\text{rr}}$

**Figure 1. Recovery Time Equivalent Test Circuit**


#### Curves Applicable to Each Anode

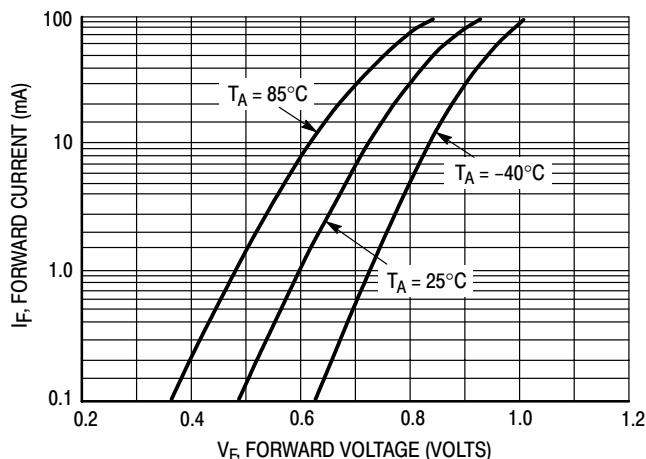


**Figure 2. Forward Voltage**



**Figure 3. Leakage Current**

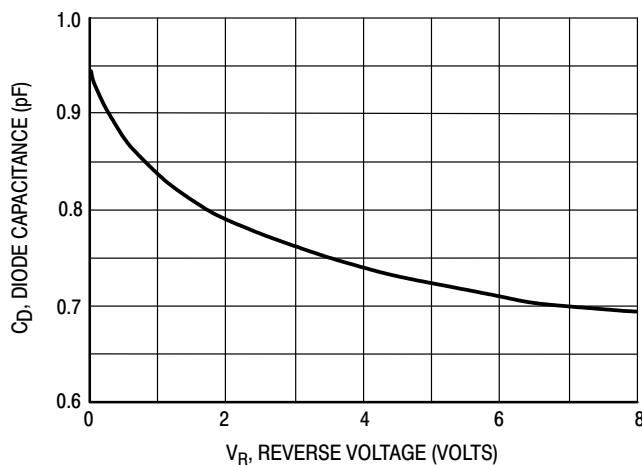

**Figure 4. Capacitance**

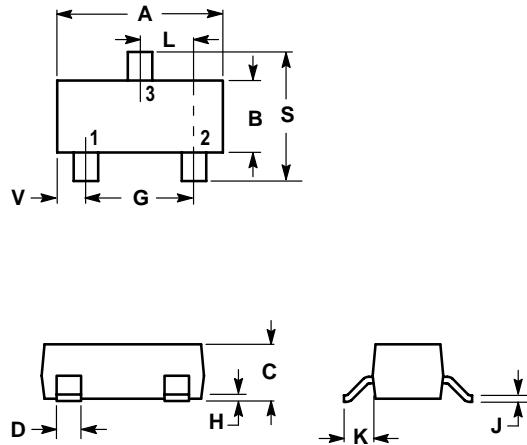**LBAV70LT1**
**SOT-23**

**NOTES:**

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
<b>A</b>	0.1102	0.1197	2.80	3.04
<b>B</b>	0.0472	0.0551	1.20	1.40
<b>C</b>	0.0350	0.0440	0.89	1.11
<b>D</b>	0.0150	0.0200	0.37	0.50
<b>G</b>	0.0701	0.0807	1.78	2.04
<b>H</b>	0.0005	0.0040	0.013	0.100
<b>J</b>	0.0034	0.0070	0.085	0.177
<b>K</b>	0.0140	0.0285	0.35	0.69
<b>L</b>	0.0350	0.0401	0.89	1.02
<b>S</b>	0.0830	0.1039	2.10	2.64
<b>V</b>	0.0177	0.0236	0.45	0.60

PIN 1. ANODE  
 2. ANODE  
 3. CATHODE

