

SRC1206N

NPN Silicon Transistor

Descriptions

- Switching application
- Interface circuit and driver circuit application


Features

- With built-in bias resistors
- Simplify circuit design
- Reduce a quantity of parts and manufacturing process
- Complementary pair with SRA2206N

Ordering Information

Type NO.	Marking	Package Code			
SRC1206N	SRC1206	TO-92N			

Outline Dimensions

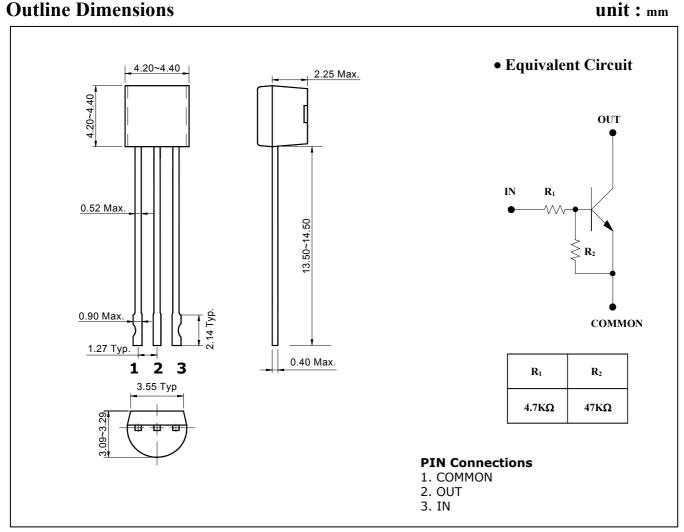

KSD-R0C006-000

Absolute Maximum Ratings

(Ta=25°C)

Characteristic	Symbol	Rating	Unit
Output voltage	Vo	50	V
Input voltage	$V_{\rm I}$	20,-5	V
Output current	I_{O}	100	mA
Power dissipation	P_{D}	400	mW
Junction temperature	T ₁	150	°C
Storage temperature range	T_{stg}	-55 ~ 150	°C

Electrical Characteristics

(Ta=25°C)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output cut-off current	I _{O(OFF)}	$V_0 = 50V, V_I = 0$	-	-	500	nA
DC current gain	G_{I}	V _O =5V, I _O =10mA	80	200	-	-
Output voltage	V _{O(ON)}	$I_O=10$ mA, $I_I=0.5$ mA	-	0.1	0.3	V
Input voltage (ON)	$V_{I(ON)}$	$V_0 = 0.2V$, $I_0 = 5mA$	-	0.9	1.3	V
Input voltage (OFF)	$V_{I(OFF)}$	V _O =5V, I _O =0.1mA	0.5	0.65	-	V
Transition frequency	f_T^*	V_0 =10V, I_0 =5mA, f=1MHz	-	200	-	MHz
Input current	$I_{\rm I}$	$V_I=5V$, $I_O=0$	-	-	1.8	mA
Input resistor (Input to base)	R_1	-	3.3	4.7	6.1	K Ω
Input resistor (Base to common)	R ₂	-	33	47	61	K Ω

^{* :} Characteristic of transistor only

Electrical Characteristic Curves

Fig. 1 I_O - $V_{I(ON)}$

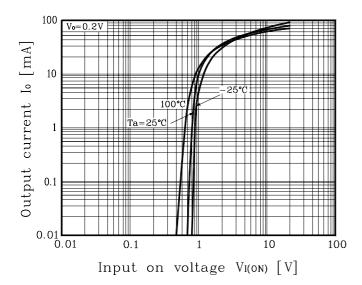


Fig. 2 I_O - $V_{I(OFF)}$


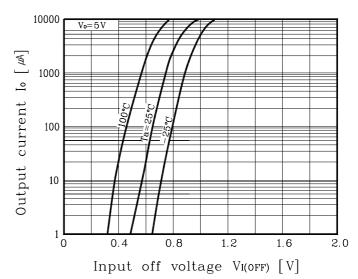


Fig. 3 G_I - I_O

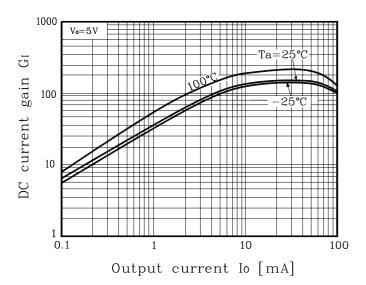

The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..

Specifications mentioned in this publication are subject to change without notice.