

Technical Data Sheet

0603 Package Chip LED (0.4mm Height)

19-217/S2C-FM2P1VY/3T

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.

Descriptions


- The 19-217 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

Device Selection Guide


| | C | | |
|-----------------------|----------|------------------|-------------|
| Part No. | Material | Emitted Color | Lens Color |
| 19-217/S2C-FM2P1VY/3T | AlGaInP | Brilliant Orange | Water Clear |



Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.1 Page: 1 of 10

Device No.: DSE-197- Prepared date: 16-Nov-2006 Prepared by: Ashley Kuo

Package Outline Dimensions

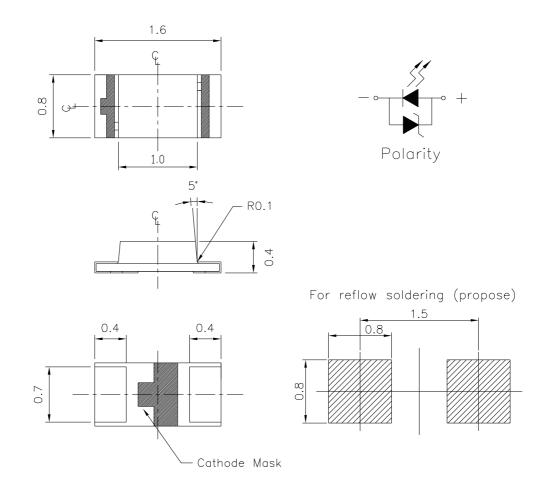

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.1 Page: 2 of 10



Absolute Maximum Ratings (Ta=25℃)

| Parameter | Symbol | Rating | Unit |
|--|--------|---|------------------------|
| Reverse Voltage | VR | 5 | V |
| Forward Current | IF | 25 | mA |
| Operating Temperature | Topr | -40 ~ +85 | $^{\circ}\!\mathbb{C}$ |
| Storage Temperature | Tstg | -40 ~ +90 | $^{\circ}\!\mathbb{C}$ |
| Electrostatic Discharge(HBM) | ESD | 2000 | V |
| Power Dissipation | Pd | 60 | mW |
| Peak Forward Current (Duty 1/10 @1KHz) | Ifp | 60 | mA |
| Soldering Temperature | Tsol | Reflow Soldering: 260 °C for 10 se Hand Soldering: 350 °C for 3 sec. | |

Electro-Optical Characteristics (Ta=25℃)

| Parameter | Symbol | Min. | Тур. | Max. | Unit | Condition |
|------------------------------|---------|-------|-------|-------|---------|--------------------|
| Luminous Intensity | Iv | 22.5 | | 57.0 | mcd | |
| Peak Wavelength | λp | | 611 | | nm | |
| Dominant Wavelength | λd | 603.0 | 605.0 | 609.0 | nm | |
| Spectrum Radiation Bandwidth | Δλ | | 17 | | nm | IF=5mA |
| Viewing Angle | 2 θ 1/2 | | 120 | | deg | |
| Forward Voltage | VF | 1.70 | | 2.20 | V | |
| Reverse Current | Ir | | | 10 | μ A | V _R =5V |

Notes:

- 1. Tolerance of Luminous Intensity $\pm 10\%$
- 2.Tolerance of Dominant Wavelength ±1nm
- 3.Tolerance of Forward Voltage ±0.05V

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.1 Page: 3 of 10



Bin Range Of Dom. Wavelength

| Group | Bin | Min | Max | Unit | Condition |
|-------|-----|-------|-------|------|-----------|
| F | EE1 | 603.0 | 606.0 | | T 7 A |
| | EE2 | 606.0 | 609.0 | nm | IF=5mA |

Bin Range Of Luminous Intensity

| | v | | | |
|-----|------|------|------|-----------|
| Bin | Min | Max | Unit | Condition |
| M2 | 22.5 | 28.5 | mcd | IF=5mA |
| N1 | 28.5 | 36.0 | | |
| N2 | 36.0 | 45.0 | | |
| P1 | 45.0 | 57.0 | | |

Bin Range Of Forward Voltage

| Group | Bin | Min | Max | Unit | Condition |
|-------|-----|------|------|------|-----------|
| | 19 | 1.70 | 1.80 | | |
| | 20 | 1.80 | 1.90 | | |
| V | 21 | 1.90 | 2.00 | V | IF=5mA |
| | 22 | 2.00 | 2.10 | | |
| | 23 | 2.10 | 2.20 | | |

Notes:


1.Tolerance of Luminous Intensity ±10%

2.Tolerance of Dominant Wavelength ±1nm

3.Tolerance of Forward Voltage ±0.05V

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.1 Page: 4 of 10

Typical Electro-Optical Characteristics Curves

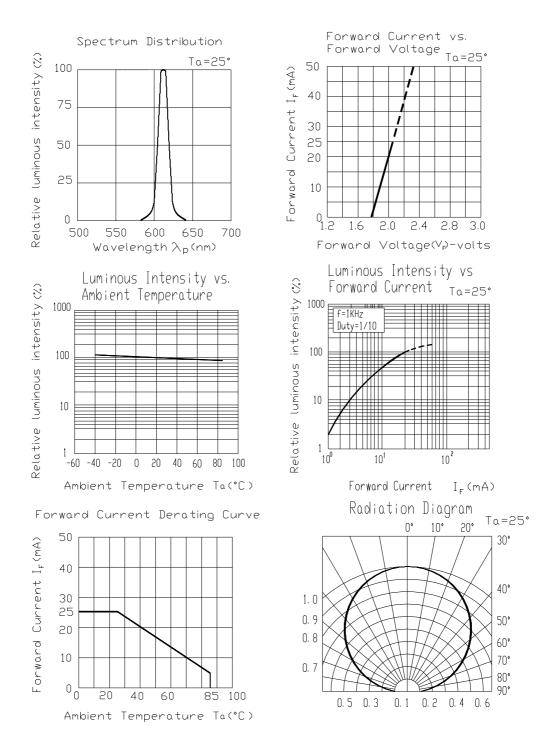

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.1 Page: 5 of 10

Device No.: DSE-197- Prepared date: 16-Nov-2006 Prepared by: Ashley Kuo

Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank




Reel Dimensions

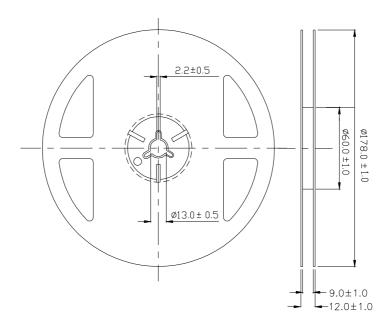

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm


Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.1 Page: 6 of 10

Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel

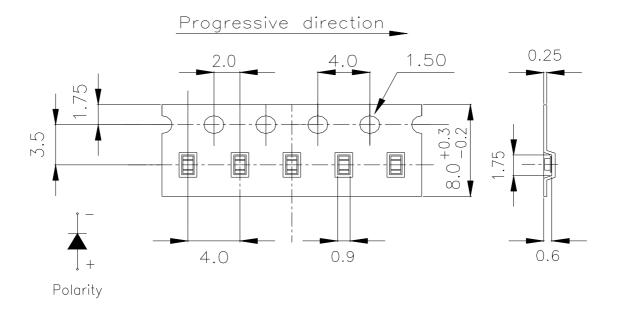

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

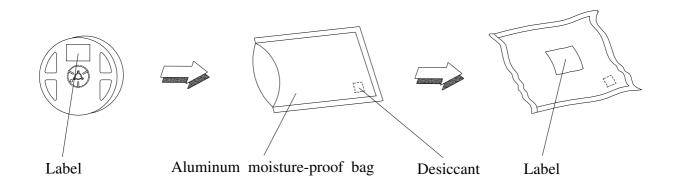

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.1 Page: 7 of 10



Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

| No. | Items | Test Condition | Test Hours/Cycles | Sample Size | Ac/Re |
|-----|-------------------------------------|---|----------------------|----------------|-------|
| 1 | Reflow Soldering | Temp. : 260°C±5°C Min. 5sec. | 6 Min. | 22 PCS. | 0/1 |
| 2 | Temperature Cycle | $H: +100^{\circ}\mathbb{C}$ 15min $\int 5 \text{ min}$ $L: -40^{\circ}\mathbb{C}$ 15min | 300 Cycles | 22 PCS. | 0/1 |
| 3 | Thermal Shock | H:+100°C 5min ∫ 10 sec L:-10°C 5min | 300 Cycles | 22 PCS. | 0/1 |
| 4 | High Temperature Storage | Temp. : 100°C | 1000 Hrs. | 22 PCS. | 0/1 |
| 5 | Low Temperature Storage | Temp. : -40°€ | 1000 Hrs. | 22 PCS. | 0/1 |
| 6 | DC Operating Life | $I_F = 20 \text{ mA}$ | 1000 Hrs. | 22 PCS. | 0/1 |
| 7 | High Temperature / High Humidity | 85°C / 85%RH | 1000 Hrs. | 22 PCS. | 0/1 |

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.1 Page: 8 of 10


Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
 - 2.2 Before opening the package: The LEDs should be kept at 30° C or less and 90%RH or less.
 - 2.3 After opening the package: The LED's floor life is 1 year under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
 - 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

 Baking treatment: 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

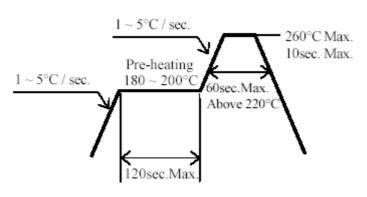

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.1 Page: 9 of 10

Device No.: DSE-197- Prepared date: 16-Nov-2006 Prepared by: Ashley Kuo




4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

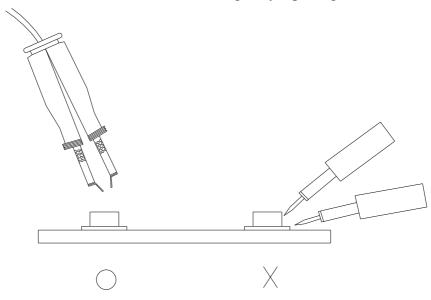

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.1 Page: 10 of 10