

#### **Technical Data Sheet**

## **Reverse Package Top View LEDs**

#### 67-21UYOC/S530-XX/TR10

#### **Features**

- P-LCC-2 package.
- White package.
- Optical indicator.
- Colorless clear window.
- Wide viewing angle.
- Suitable for vapor-phase reflow, Infrared reflow and wave solder processes.
- Computable with automatic placement equipment.
- Available on tape and reel (12mm Tape).
- Pb-free.
- The product itself will remain within RoHS compliant version

#### **Descriptions**


• The 67-21 series is available in soft orange, green, blue and yellow. Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector. This feature makes the TOP View LEDs ideal for light pipe application. The low current requirement makes this device ideal for portable equipment or any other application where power is at a premium.

#### **Applications**

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- Light pipe application.
- General use.

#### **Device Selection Guide**

C	Lawa Calan		
Material	<b>Emitted Color</b>	Lens Color	
AlGaInP	Brilliant Orange	Water Clear	

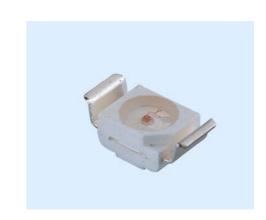

verlight Electronics Co., Ltd.

Device No.: DSE-671-237


http://www.everlight.com

Prepared date 18.Sep.2005

Rev. 2 Page: 1 of 9

## 67-21UYOC/S530-XX/TR10

### **Package Dimensions**

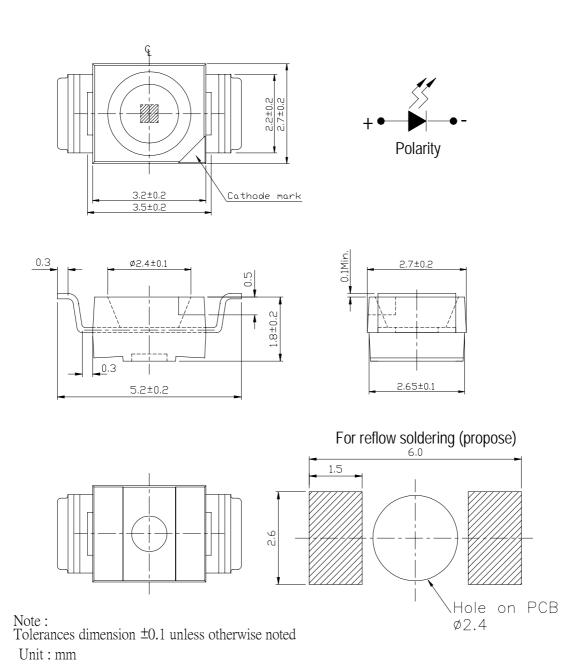

verlight Electronics Co., Ltd.

Device No.: DSE-671-237

http://www.everlight.com

Prepared date 18.Sep.2005

Rev. 2

Page: 2 of 9



## 67-21UYOC/S530-XX/TR10

## **Absolute Maximum Ratings (Ta=25°C)**

Parameter	Symbol	Rating	Unit
Reverse Voltage	$V_{R}$	5	V
Forward Current	<b>I</b> F	25	mA
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\! \mathbb{C}$
Storage Temperature	Tstg	-40 ~ +100	$^{\circ}\!\mathbb{C}$
Electrostatic Discharge(HBM)	ESD	2000	V
Power Dissipation	Pd	60	mW
Peak Forward Current (Duty 1/10 @1KHz)	Ifp	60	mA
Soldering Temperature	Tsol	Reflow Soldering: 260 °C for 10 sec.  Hand Soldering: 350 °C for 3 sec.	

verlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 3 of 9

Device No.: DSE-671-237 Prepared date 18.Sep.2005 Prepared by: Teresa Lee



## 67-21UYOC/S530-XX/TR10

**Electro-Optical Characteristics (Ta=25°C)** 

Parameter		*Chip Rank	Min.	Тур.	Max.	Unit	Condition
Luminous intensity		A2	40	55		mcd	I <sub>F</sub> =20mA
		A3	50	83			
		A4	63	95			
	Iv	A5	80	123			
		A6	100	154	-		
		A7	125	215			
		A8	140	251			
Viewing Angle	2 \theta 1/2			120		deg	I <sub>F</sub> =20mA
Peak Wavelength	λр			611		nm	I <sub>F</sub> =20mA
Dominant Wavelength	λd			605		nm	I <sub>F</sub> =20mA
Spectrum Radiation Bandwidth	Δλ			17		nm	I <sub>F</sub> =20mA
Forward Voltage	$V_{\mathrm{F}}$		1.7	2.0	2.4	V	I <sub>F</sub> =20mA
Reverse Current	IR				10	$\mu$ A	V <sub>R</sub> =5V

\*67-21UYOC/S530-<u>XX</u>/TR10



Chip Rank

verlight Electronics Co., Ltd. Device No. : DSE-671-237 http://www.everlight.com


Prepared date 18.Sep.2005

Rev. 2

Page: 4 of 9

#### 67-21UYOC/S530-XX/TR10

### **Typical Electro-Optical Characteristics Curves**

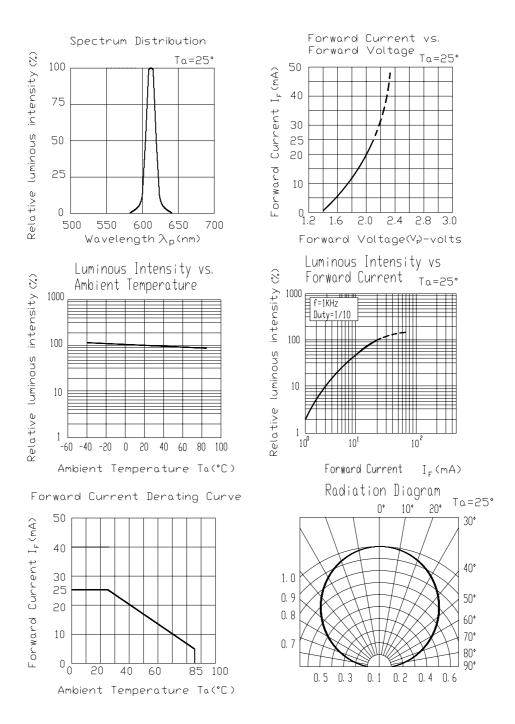




### 67-21UYOC/S530-XX/TR10

#### Label explanation


**CAT: Luminous Intensity Rank** 

**HUE: Dom. Wavelength Rank** 

**REF: Forward Voltage Rank** 

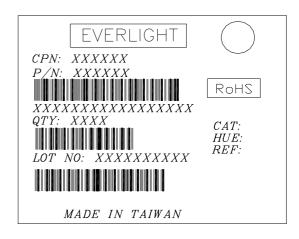

#### **Reel Dimensions**

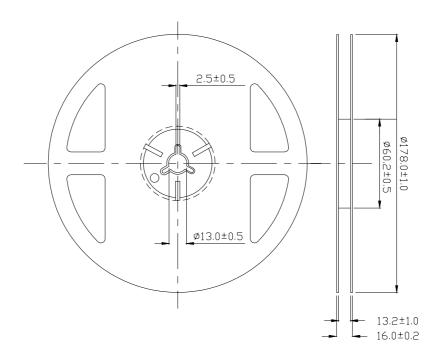

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

verlight Electronics Co., Ltd. Device No.: DSE-671-237 http://www.everlight.com


Rev. 2

Page: 6 of 9

Prepared date 18.Sep.2005


### 67-21UYOC/S530-XX/TR10

#### Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel.

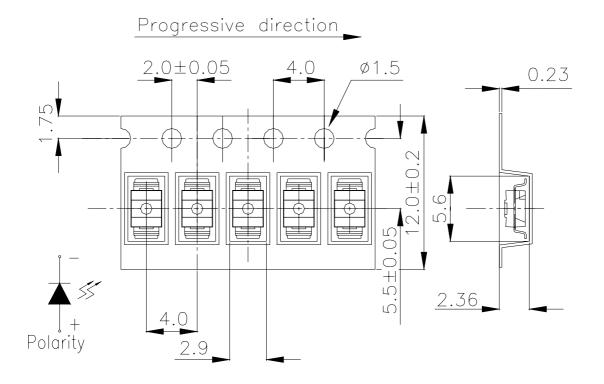

**Note:** Tolerances Unless Dimension  $\pm 0.1$ mm Unit = mm

#### **Moisture Resistant Packaging**

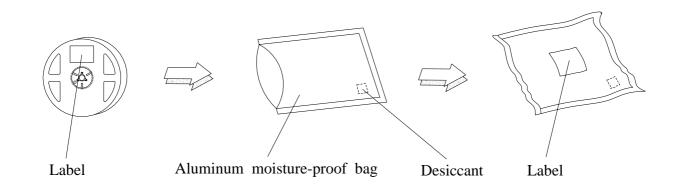

verlight Electronics Co., Ltd.

Device No.: DSE-671-237

http://www.everlight.com

Prepared date 18.Sep.2005

Rev. 2

Page: 7 of 9



### 67-21UYOC/S530-XX/TR10

### **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min $\int$ 5 min $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100°C 5min ∫ 10 sec L:-10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°C	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

Device No.: DSE-671-237



#### 67-21UYOC/S530-XX/TR10

#### **Precautions For Use**

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).


#### 2. Storage

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at 30°C or less and 70%RH or less.
- 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
- 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : 60±5°C for 24 hours.

#### 3. Soldering Condition

3.1 Pb-free solder temperature profile

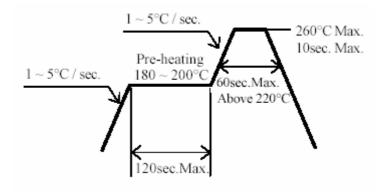

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

#### 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

verlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 9 of 9


Device No.: DSE-671-237 Prepared date 18.Sep.2005 Prepared by: Teresa Lee



### 67-21UYOC/S530-XX/TR10

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

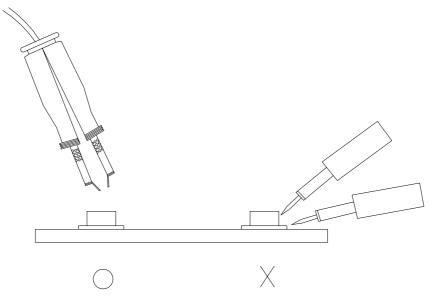

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

verlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 10 of 9

Device No.: DSE-671-237 Prepared date 18.Sep.2005 Prepared by: Teresa Lee