## KTE6000 / KTU6000...CS Series

### **OEM** submersible pressure transducers

#### **FEATURES**

- 0...250 to 0...5000 mbar,
   0...5 to 0...70 psi gage
- · For corrosive media
- · 4...20 mA output
- · Field interchangeable



Wetted materials:

stainless steel 1.4404 (316L), ceramic  $Al_2O_3$ , PVC, PUR, NBR $^{11}$ 

Housing:

protection class IP 68 (according to DIN EN 60529) respectively NEMA 6P<sup>1</sup>



#### SPECIFICATIONS9,10

#### **Maximum ratings**

Supply voltage<sup>2</sup>

(reverse polarity protection) 12...30 V

Temperature limits


Storage -40 to 85°C
Operating -25 to 85°C
Compensated 0 to 70°C

Vibration (5 to 500 Hz)  $10 g_{RMS}$ 

Mechanical shock 50 g

Proof pressure<sup>3</sup> 2 x rated pressure

### **ELECTRICAL CONNECTION**



August 2008 / 595 1/4



# KTE6000 / KTU6000...CS Series OEM submersible pressure transducers

#### PERFORMANCE CHARACTERISTICS

(unless otherwise noted,  $V_s = 15 \text{ V}$ ,  $R_I = 100 \Omega$ ,  $t_{amb} = 25 ^{\circ}\text{C}$ )

Characteristic	Characteristics Min. Ty			Max.	Unit	
Operating pressure	KTEM6250 KTEM6400 KTEM6600 KTEM61K0 KTEM61K6	0 0 0 0		250 400 600 1000 1600	mbar	
	KTEM62K0 KTEM65K0	0 0		2000 5000		
	KTU6005 KTU6010 KTU6015 KTU6020 KTU6030 KTU6070	0 0 0 0 0		5 10 15 20 30 70	psi	
Zero pressure offset		3.8	4.0	4.2	4.2 mA	
Full scale span <sup>7</sup>		15.8	16.0	16.2	IIIA	
Thermal effects (0 to 70°C) <sup>4</sup> Thermal effects (-25 to 0°C, 70 to 85°C)	Offset (250 mbar/5 psi) Offset (< 1 bar/15 psi) Offset (all others) Span Offset (<1 bar/15 psi)		0.04 0.03 0.02 0.02 0.06	0.08 0.06 0.04 0.04	%FSO/°C	
	Offset (all others) Span		0.03 0.03			
Non-linearity, hysteresis (BSL) and repeatability <sup>5</sup>			±0.1	±0.3		
Output noise (0 < f < 1 kHz)			±0.04		%FSO	
Long term stability <sup>6</sup>			±0.2			
Response time (10 to 90 %)			1	5	ms	
Power supply rejection	Offset Span		0.05 0.05		%FSO/V	
Power consumption (I <sub>L</sub> = 20 mA)			260		mW	

#### Specification notes (for all devices):

- 1. The package is an all-sealed housing. For proper function the gage port is vented to the atmosphere through the connecting cable. Thus the vent tube of the cable end must have access to the ambient pressure.
- 2. The minimum supply voltage is directly proportional to the load resistance seen by the transmitter. For more details see the load limitation diagram.
- 3. Proof pressure is the maximum pressure which may be applied without causing damage to the sensing element.
- 4. Thermal effects tested and guaranteed from 0°C to 70°C relative to 25°C. All specifications shown are relative to 25°C.
- 5. Non-linearity refers to the Best Straight Line fit measured for offset, full scale span and 1/2 full scale span.
- 6. Long term stability is the change in output after one year or 1 million pressure cycles.
- 7. Span is the arithmetic difference in transmitter output signal measured at zero pressure and the maximum operating pressure.
- 8. Tests are in accordance with EN61000-6-2, April 99.
- 9. CE-labelling is in accordance with 89/336/EEC.
- 10. The pressure transmitters must not be used as safety accessories according to article 1, 2.1.3 of the directive 97/23/EC.
- 11. Other sealing materials are available on request.


August 2008 / 595 2/4



#### **ELECTROMAGNETIC CAPABILITY8**

	Test conditions		Criterion	Interference
Radiated, radio frequency electromagnetic field immunity (RFI)	EN61000-4-3:	Grade 3 10 V/m, 80 MHz to 1000 MHz 80 % AMC (1 kHz)	А	<1 % FSO
Electrical fast transient / burst immunity (EFT)	EN61000-4-4:	Grade 3 ±2 kV	В	<1 % FSO
Electrostatic discharge immunity test (ESD)	EN61000-4-2:	Grade 4 ±8 kV, contact discharge	В	<1 % FSO
Immunity to conducted disturbances induced by radio-frequency fields	EN61000-4-6:	Grade 3 0,15 to 80 MHz 10 V, 80 % AMC (1 kHz)	А	<1 % FSO

#### **LOAD LIMITATION**




August 2008 / 595 3/4




# KTE6000 / KTU6000...CS Series OEM submersible pressure transducers

#### **OUTLINE DRAWING**

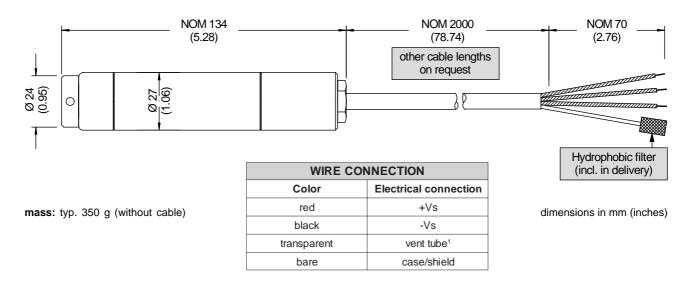

#### ORDERING INFORMATION

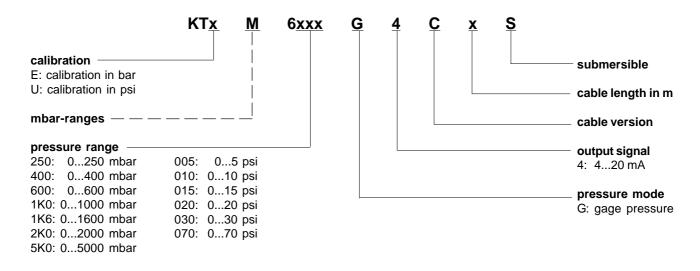

**Note:** Other pressure ranges and options are widely available. Please contact your nearest Sensortechnics sales representative.

Sensortechnics reserves the right to make changes to any products herein. Sensortechnics does not assume any liability arising out of the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.

August 2008 / 595 4/4

