



# Bandpass Filter

KR Model 2322

## Passband Amplitude & Group Delay

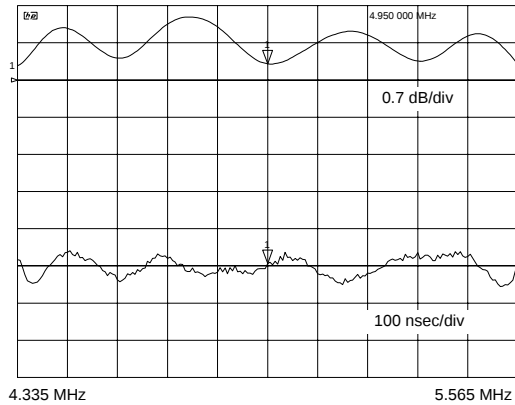


## Overall Amplitude

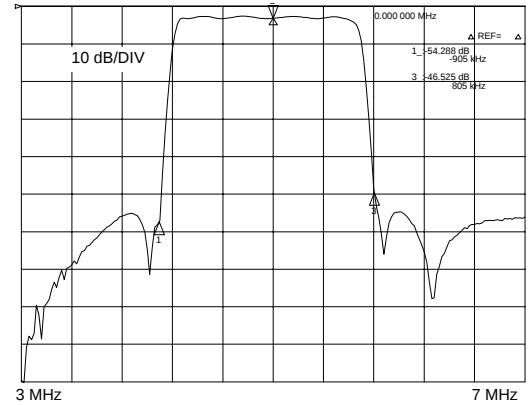

## Specifications

|                                           |                    |
|-------------------------------------------|--------------------|
| KR Part Number                            | 2322               |
| Filter Type                               | Bandpass           |
| Center Frequency                          | 4.95 MHz           |
| Insertion Loss                            | <3.5 dB            |
| Passband $\pm 0.7$ dB                     | 4.335 to 5.565 MHz |
| Lower Stopband dc to 4.905 MHz            | > 45 dB            |
| Upper Stopband 5.805 to 100 MHz           | > 45 dB            |
| Group Delay Ripple 4.335 MHz to 5.565 MHz | < $\pm 100$ nsec   |
| Source and Load Impedance                 | 75 $\Omega$        |

## Outline Drawing

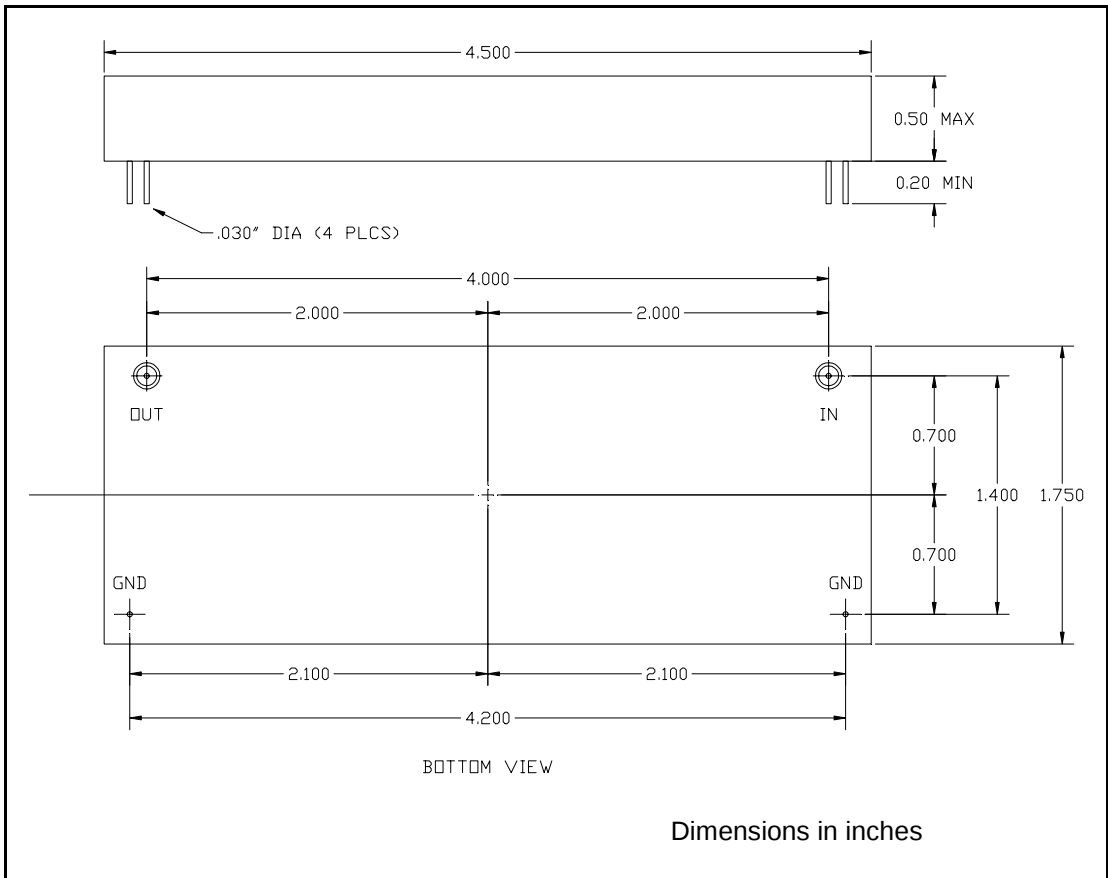

**KR Electronics**  
[www.krfilters.com](http://www.krfilters.com)  
 91 Avenel Street  
 Avenel, NJ 07001  
 732-636-1900