TACT Switch™ 6mm Square Dust-proof (Snap-in Type)

SKHW Series

RoHS


Suitable for various electronic devices with unique dust-proof structure and sharp operation feeling.



Product Line

Product No.	Operating force	Operating direction	Travel (mm)		Rating (min.)	Operating life (5mA 5V DC)	Initial contact resistance	Stem color	Stem height	Minimum order unit(pcs.)
SKHWALA010	1.57N		0.3	50mA 12V DC	10 <i>µ</i> A 1V DC	1,000,000cycles	100m max.	Dark gray	- h=4.3mm - h=5mm	- 1,000
SKHWARA010	2.55N	Vertical				500,000cycles		Red		
SKHWAPA010	1.57N	ventical	0.5			1,000,000cycles		Dark gray		
SKHWAQA010	2.55N	55N				500,000cycles		Red		

Dimensions

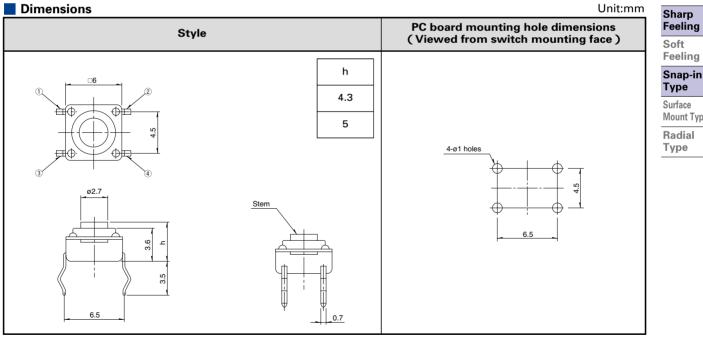

📕 Circuit Diagram



Note

Please use 1.6mm thick PC boards.

Detector

Slide

Rotary

Encoders

Power

Dual-in-line

Products

Mount Type Radial Type





List of Varieties

Sharp Feeling Type

	SKQB	SKHJ	SKQJ	SKHH	SKHL	SKQJ	SKRD	SKHW	SKHH	SKHL	SKHR		Series		
Detecto			2			A	S.						Photo		
Push	,)				Snap–in	. 1	1	r	/	1.		Туре		
Slide	Water– proof	With LED	vpe	rizontal ty	Но		Horizontal type	Dust-proof type				s	eatures	F	
Rotary												tical	Vert	Ope dire	
Encoder	<u> </u>	I							<u>I</u>	1		ontal	Horizo	Operating direction	
Power		- 8	7.5		7.3		6.2			6		w			
Dual-in-line Package Tyj	10		85	7.85	7.22	6.6	7.15	6		3.5	4.5	D		Dimer (m	
TACT Switch	5	8.5	7.3	7.4	4.3	5	7.4		4.3		3.8	н			
Custom Product	\$	Ţ	\$	ţ	↓ ↓	\$	\$	1		Ţ	Ţ	1N 5N	Operation force coverage		
												ninal	nd tern	Grou	
Sharp Feeling	-20 to + 70 SKHJ/HL(Vertical Type) /QJ -30 to + 85											Operating temperature range			
Soft Feeling Snap-ir	100M min. 100V DC												Insula resist	Elec	
Type Surface		250V AC for 1min.								age oof	Volta pro	Electrical performance			
Mount Ty Radial	10 to 55 to 10Hz/min., the amplitude is 1.5mm for all the frequencies, in the 3 direction of X, Y and Z for 2hours respectively										ation	Vibra			
Туре	Shall be in accordance with individual specifications.										time	Lifet	Durability		
	-30 ± 2 for 96h											d	Co		
					96h	±2 for §	80 :					heat	Dry h	Environmental performance	
	60 ± 2 , 90 to 95%RH for 96h) heat	Damp	ental ance		
	265	263	261	255	253	261	260	259	255	253	252		Page	-	

Note

The automotive operating temperature range to be individually discussed upon request.

Soldering Conditions

Condition for Reflow

Available for Surface Mount Type.

- 1. Heating method: Double heating method with infrared heater.
- 2. Temperature measurement: Thermocouple 0.1 to 0.2 CA(K) or CC(T) at solder joints (copper foil surface). A heat resistive tape should be used to fix thermocouple.

Push 3. Temperature profile

Slide

Detector

Rotary


Encoders

Power

Dual-in-line Package Type

TACT Switch[™]

Custom-Products

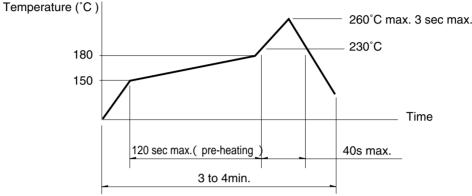

Time inside soldering equipment

Note

- 1. The above temperature shall be measured on the mounting surface of a PC board. There are cases where the PC board's temperature greatly differs from that of the switch, depending on the material, size, thickness of PC boards and others. The above-stated conditions shall also apply to switch surface temperatures.
- 2. Soldering conditions differ depending on reflow soldering machines. Prior verification of soldering condition is highly recommended.

Sharp Feeling
Soft Feeling
Snap-in Type
Surface Mount Type
Radial Type

nıgr

Conditions for Auto-dip Available for Snap-in Type and Radial Type

(Except SKHJ, SKHL, SKQJ, SKQK, SKEG series)

ltems	Condition				
Flux built-up	Mounting surface should not be exposed to fluk				
Preheating temperature	Ambient temperature of the soldered surface of PC board. 100 max.				
Preheating time	60s max.				
Soldering temperature	260 max.				
Duration of immersion	5s max.				
Number of soldering	2times max.				

Manual Soldering (Except SKRT Series)

Items	Condition			
Soldering temperature	350 max.			
Duration of soldering	3s max.			
Duration of soldering	3s max.			
Capacity of soldering iron	60W max.			

Notes

- 1. Consult with us for availability of TACT Switch[™] washing.
- 2. Prevent flux penetration from the top side of the TACT Switch[™].
- 3. Switch terminals and a PC board should not be coated with flux prior to soldering.
- 4. The second soldering should be done after the switch is stable with normal temperature.
- 5. Use the flux with a specific gravity of min 0.81.
- (EC-19S-8 by TAMURA Corporation, or equivalents.)