



1208 SERIES


Operating Voltage= 250 / 480 VAC 3 PH Wye


Operating CurrentMax= 80, 100amp
Operating Frequency= 50-60Hz
Temperature Range= -40 to 50 deg. C
Storage Temperature = -55 to 85 deg. C
DieWithstand(Ph to Case)= 1500V~ for 1 Min
DieWithstand (Ph to Ph)= 1500Vdc for 1 min
Leakage Current = 10 mA @ 250 VAC, 60Hz
Discharge after 1.0 sec.= 34V Max

JMK P/N Ordering Information: 80 amp MM-1208-80 100 amp MM-1208-100

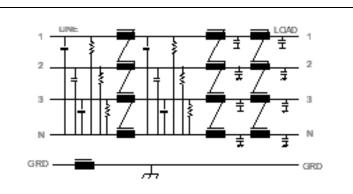

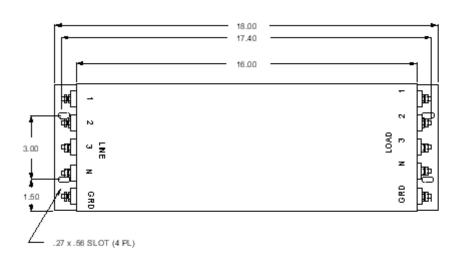



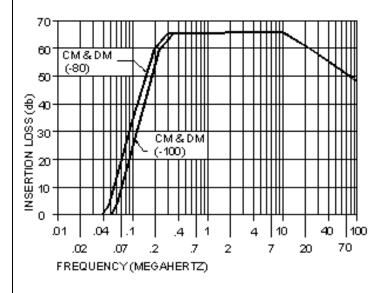

This filter series is intended to provide very good common mode and differential insertion loss for high current 3 phase Wye systems. The compact size makes it easy to fit into the rear of a 19.0in equipment rack leaving more space for system hardware. The standard construction is more than adequate for most installation environments. Should your application require operation in a more severe environment JMK's engineering staff can easily modify the mechanical construction to meet the most severe design criteria.

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115 email: info@jmkfilters.com

EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 Fax: 44-(0) 141 589 1884