

334-15/T1C1-4VXC

Features

- Popular T-13/4 colorless 5mm package.
- High luminous power.
- Typical chromaticity coordinates x=0.30, y=0.29 according to CIE1931.
- Bulk, available taped on reel.
- ESD-withstand voltage: up to 4KV
- The product itself will remain within RoHS compliant version.



Descriptions

- The series is designed for application required high luminous intensity.
- The phosphor filled in the reflector converts the blue emission of InGaN chip to ideal white.

Applications

- Outdoor Displays
- Optical Indicators
- Backlighting
- Marker Lights


Device Selection Guide

DA DE NO	Cł	T C. L		
PART NO.	Material	Emitted Color	Lens Color	
334-15/T1C1-4VXC	InGaN	White	Water Clear	

Everlight Electronics Co., Ltd. http\\:www.everlight.com Rev: 1 Page: 1 of 9



334-15/T1C1-4VXC

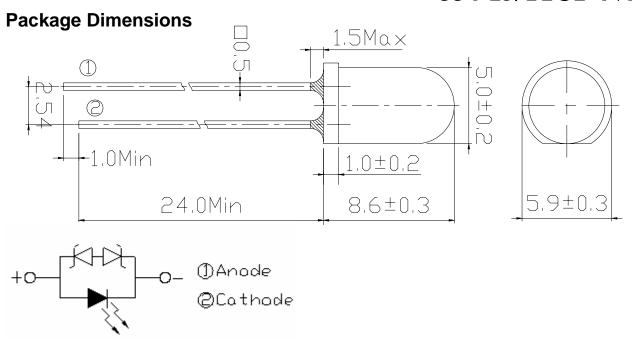

Notes:

- 1.All dimensions are in millimeters, and tolerance is 0.25mm except being specified.
- 2.Lead spacing is measured where the lead emerges from the package.
- 3. Protruded resin under flange is 1.5mm Max. LED.

Absolute Maximum Ratings (Ta=25°C)


Parameter	Symbol	Rating	Unit
Continuous Forward Current	I_F	30	mA
Peak Forward Current(Duty /10 @ 1KHZ)	I_{FP}	100	mA
Reverse Voltage	V_R	5	V
Operating Temperature	T_{opr}	-40 ~ +85	$^{\circ}\!\mathbb{C}$
Storage Temperature	T_{stg}	-40 ~ +100	$^{\circ}\!\mathbb{C}$
Soldering Temperature (T=5 sec)	T_{sol}	260 ± 5	$^{\circ}\!\mathbb{C}$
Power Dissipation	P_d	100	mW
Zener Reverse Current	Iz	100	mA
Electrostatic Discharge	ESD	4K	V

Everlight Electronics Co., Ltd. http\\:www.everlight.com Rev: 1 Page: 2 of 9



334-15/T1C1-4VXC

Production Designation

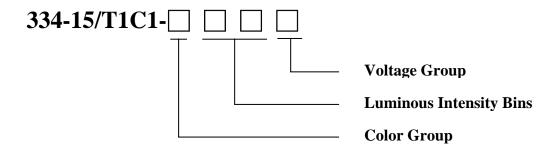

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Condition	Min.	Тур.	Max.	Units
Forward Voltage	V_{F}	I _F =20mA	3.0		3.6	V
Zener Reverse Voltage	Vz	Iz=5mA	5.2			V
Reverse Current	I_R	$V_R=5V$			50	uA
Luminous Intensity	I_{V}	I _F =20mA	11250		22500	mcd
Viewing Angle	2 0 1/2	I _F =20mA		15		deg
Characteristic Consultant	X	I 20 A		0.30		
Chromaticity Coordinates	у	I _F =20mA		0.29		

 $Everlight\ Electronics\ Co.,\ Ltd. \qquad \qquad http \verb|\:www.everlight.com| \qquad \qquad Rev: \ 1 \qquad \qquad Page:\ 3\ of\ 9$



334-15/T1C1-4VXC

Luminous Intensity Combination (mcd at 20mA)

Rank	Min	Max
V	11250	14250
W	14250	18000
X	18000	22500

^{*}Measurement Uncertainty of Luminous Intensity: ±15%

Forward Voltage Combination (V at 20mA)

Group	С		
Rank	1	2	3
Min.	3.00	3.20	3.40
Max.	3.20	3.40	3.60

^{*}Measurement Uncertainty of Forward Voltage: ±0.1V

Color Combination (at 20mA)


Group	Bins
4	A0+B5+B6

Everlight Electronics Co., Ltd. http\\:www.everlight.com Rev: 1 Page: 4 of 9



334-15/T1C1-4VXC

CIE Chromaticity Diagram

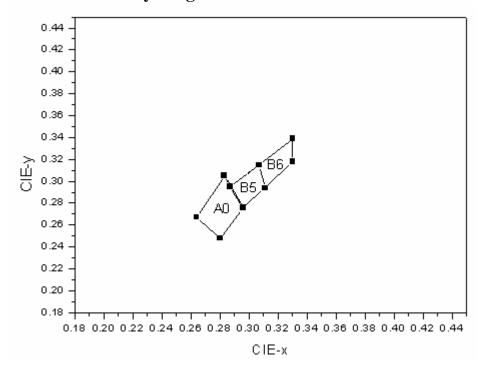

Color Ranks (IF=20mA, $Ta=25^{\circ}C$)

Color Ranks		CIE			
4.0	X	0.264	0.283	0.296	0.28
A0	Y	0.267	0.305	0.267	0.248
D.C	X	0.287	0.307	0.311	0.296
B5	Y	0.295	0.315	0.294	0.276
В6	X	0.307	0.33	0.33	0.311
	Y	0.315	0.339	0.318	0.294

^{*}Measurement uncertainty of the color coordinates: ±0.01


Everlight Electronics Co., Ltd. http\\:www.everlight.com Rev: 1 Page: 5 of 9




334-15/T1C1-4VXC

Typical Electro-Optical Characteristics Curves


Relative Intensity vs. Wavelength




Forward Current vs. Forward Voltage




Relative Intensity vs. Forward Current




Forward Current vs. Ambient Temp.



Chromaticity Coordinate vs. Forward Current



Relative Intensity vs. Angle Displacement

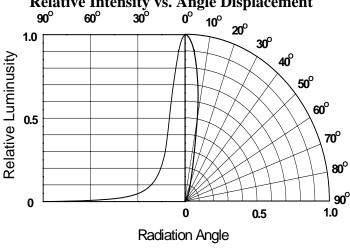

Everlight Electronics Co., Ltd.

Device Number: DLE-033-A98

http\\:www.everlight.com

Established date:1-9-2006

Rev: 1

Page: 6 of 9

Established by: Amy Ma



334-15/T1C1-4VXC

Label Form Specification

CPN: Customer's Production Number

P/N: Production Number QTY: Packing Quantity

CAT: Ranks HUE: Space REF: Reference

LOT No: Lot Number

MADE IN TAIWAN: Production Place


Everlight Electronics Co., Ltd. http\\:www.everlight.com Rev: 1 Page: 7 of 9



334-15/T1C1-4VXC

Notes

- 1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
- 2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.
- 4. Below the zener reference voltage Vz, all the current flows through LED and as the voltage rises to Vz, the zener diode "breakdown." If the voltage tries to rise above Vz current flows through the zener branch to keep the voltage at exactly Vz.
- 5. When the LED is connected using serial circuit, if either piece of LED is no light up but current can't flow through causing others to light down. In new design, the LED is parallel with zener diode. if either piece of LED is no light up but current can flow through causing others to light up



Everlight Electronics Co., Ltd. http\\:www.everlight.com Rev: 1 Page: 8 of 9



334-15/T1C1-4VXC

6. Soldering Condition

Careful attention should be paid during soldering. When soldering, leave more then 3mm from solder joint to case, and soldering beyond the base of the tie bar is recommended.

Avoiding applying any stress to the lead frame while the LEDs are at high temperature particularly when soldering.

Recommended soldering conditions:

Hand Soldering		DIP Soldering		
Temp. at tip of iron	400°C Max. (30W Max.)	Preheat temp.	100°C Max. (60 sec Max.)	
Soldering time	3 sec Max.	Bath temp.	265 Max.	
Distance	3mm Min.(From solder joint to case)	Bath time.	5 sec Max.	
		Distance	3mm Min.	

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http:\\www.everlight.com

Everlight Electronics Co., Ltd. http\\:www.everlight.com Rev: 1 Page: 9 of 9