

## Voltage Controlled Oscillator 9.4 - 10.8 GHz

Preliminary: Rev. V2P

#### **Features**

- · Low Phase Noise
- · Wide Tuning Range
- Divide-by-Two Output
- Integrated Buffer Amplifier
- Excellent Temperature Stability
- +5V Bias Supply
- Lead-Free 5 mm 32-Lead PQFN Package
- 100% Matte Tin Plating over Copper
- Halogen-Free "Green" Mold Compound
- RoHS\* Compliant and 260°C Reflow Compatible

### **Description**

The MAOC-009265-PKG003 is an InGaP HBT-based voltage controlled oscillator for frequency generation. No external matching components are required. This VCO is easily integrated into a phase lock loop using the divide-by-two output. The extremely low phase noise makes this part ideal for many radio applications including high capacity digital radios.

The 5 mm PQFN package has a lead-free finish that is RoHS compliant and compatible with a 260°C reflow temperature. The package also features low lead inductance and an excellent thermal path. The MTTF is 1,000,000 hours at a 150°C junction temperature.


#### **Primary Applications**

- Point-to-Point Radio
- Point-to-Multipoint Radio
- Communications Systems
- Low Phase Noise Applications

### **Ordering Information**

Part Number	Package		
MAOC-009265-TR0500	Tape & Reel, 500 pieces		
MAOC-009265-TR1000	Tape & Reel, 1000 pieces		
MAOC-009265-SMB003	Sample Board		

#### **Block Diagram**

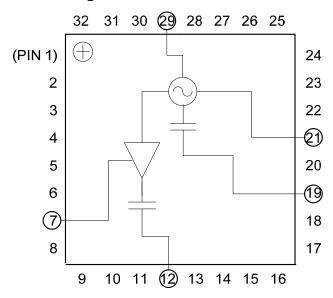

### Pin Designations 1

Pin	Function	Pin	Function		
1	N/C	17	N/C		
2	N/C	18	N/C		
3	N/C	19	Fo		
4	N/C	20	N/C		
5	N/C	21	V <sub>CC</sub>		
6	N/C	22	N/C		
7	$V_{BUFFER}$	23	N/C		
8	N/C	24	N/C		
9	N/C	25	N/C		
10	N/C	26	N/C		
11	N/C	27	N/C		
12	Fo/2	28	N/C		
13	N/C	29	$V_{TUNE}$		
14	N/C	30	N/C		
15	N/C	31	N/C		
16	N/C	32	N/C		

1. The exposed pad centered on the package bottom must be connected to RF and DC ground.

<sup>\*</sup> Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

North America Tel: 800.366.2266 / Fax: 978.366.2266

<sup>•</sup> Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300

Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298
 Visit www.macomtech.com for additional data sheets and product information.



Voltage Controlled Oscillator 9.4 - 10.8 GHz

Preliminary: Rev. V2P

### Electrical Specifications: $T_A=+25$ °C, $V_{CC}=5.0$ V, $Z_L=50$ $\Omega$

Paramo	eter	Min.	Тур.	Max.	Units	
Frequency Range	F <sub>o</sub>	F <sub>o</sub> 9.4 - 10.8 F <sub>o</sub> /2 4.7 - 5.4			GHz	
Frequency Range	F <sub>o</sub> /2			4.7 - 5.4		
Output Power across operating	RF Port		6		dBm	
frequency range	RF/2 Port		5		ubiii	
SSB Phase Noise	RF Port, 10KHz Offset	RF Port, 10KHz Offset -85			dDo/Uz	
$V_{CC} = V_{BUFFER} = V_{TUNE} = 5V$	RF Port, 100KHz Offset		-110		dBc/Hz	
Tune Voltage	$V_{TUNE}$	1		13	V	
Supply Current	I <sub>CC</sub> + I <sub>BUFFER</sub>		190		mA	
Control Current Leakage	$V_{TUNE}=13V$		1		μA	
Output Batura Laga	RF Port		-3		4D	
Output Return Loss	RF/2 Port		-7		dB	
Harmonics/Subharmonics V <sub>CC</sub> =V <sub>BUFFER</sub> =V <sub>TUNE</sub> =5V	RF Port, <sup>1</sup> / <sub>2</sub> F <sub>o</sub>		21		dBc	
	RF Port, <sup>3</sup> / <sub>2</sub> F <sub>o</sub>		47			
	RF/2 Port, 2F <sub>o</sub>		11			
	RF/2 Port, 3F <sub>o</sub>		22			
Pulling (Sensitivity to Match)	RF Port, VSWR = 1.95:1 to					
	2.25:1	8.2 MI		MHz pk-pk		
	$V_{CC} = V_{BUFFER} = V_{TUNE} = 5V$					
Pushing (Sensitivity to Supply Voltage)	RF Port		20		MHz/V	
	RF/2 Port		4			
Frequency Drift Rate	RF Port		.9		MHz/°C	
(Sensitivity to Temperature)	RF/2 Port		.5			

## **Absolute Maximum Ratings <sup>2,3</sup>**

Parameter	Absolute Maximum	
V <sub>CC</sub> (VCO & Buffer)	+6V	
Storage Temperature	-55°C to +150°C	
Operating Temperature	-40°C to +85°C	

- Exceeding any one or combination of these limits may cause permanent damage to this device.
- M/A-COM does not recommend sustained operation near these survivability limits.

### **Static Sensitivity**

Gallium Arsenide Integrated Circuits are sensitive to Electrostatic Discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.



**ESD Rating: 200 Volts** 

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions

- North America Tel: 800.366.2266 / Fax: 978.366.2266
- Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298
   Visit www.macomtech.com for additional data sheets and product information.



Voltage Controlled Oscillator 9.4 - 10.8 GHz

Preliminary: Rev. V2P

## Typical Performance Curves: $V_{CC} = 5V$ , $T_A = +25^{\circ}C$ (unless otherwise indicated)

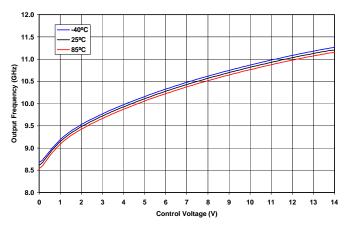


Figure 1: Frequency vs. Control Voltage and Temperature - RF Port

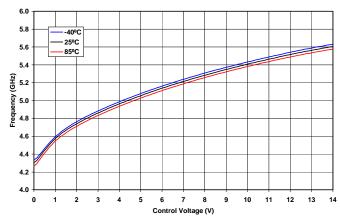


Figure 2: Frequency vs. Control Voltage and Temperature - RF/2 Port

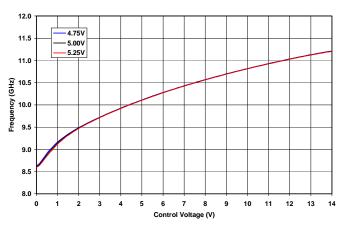


Figure 3: Frequency vs. Control Voltage and Supply Voltage - RF Port

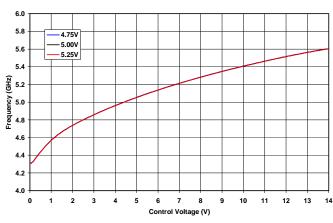


Figure 4: Frequency vs. Control Voltage and Supply Voltage - RF/2 Port

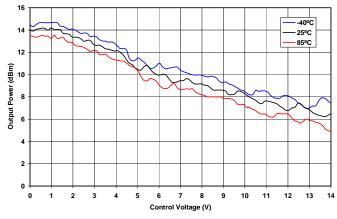


Figure 5: Output Power vs. Control Voltage and Temperature - RF Port

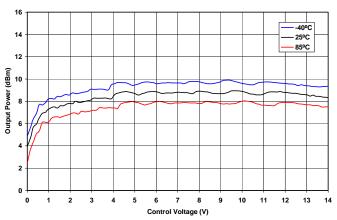


Figure 6: Output Power vs. Control Voltage and Temperature - RF/2 Port

- ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

  PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology
- **PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.
- North America Tel: 800.366.2266 / Fax: 978.366.2266
- Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298
   Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.



Voltage Controlled Oscillator 9.4 - 10.8 GHz

Preliminary: Rev. V2P

## Typical Performance Curves: $V_{CC} = 5V$ , $T_A = +25^{\circ}C$ (unless otherwise indicated)

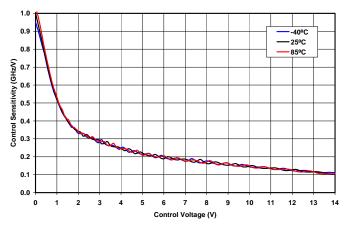


Figure 7: Frequency Sensitivity vs. Control Voltage and Temperature - RF Port

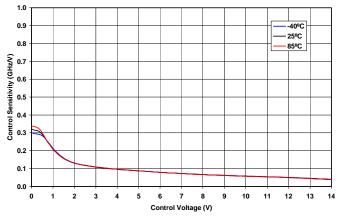


Figure 8: Frequency Sensitivity vs. Control Voltage and Temperature - RF/2 Port

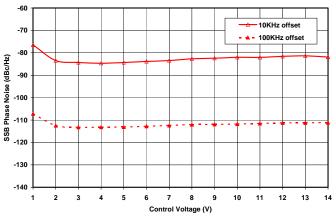


Figure 9. Single Side Band Phase Noise vs. Control Voltage and Offset Frequency

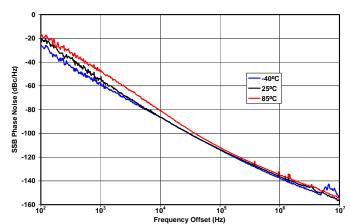


Figure 10. Single Side Band Phase Noise vs. Frequency Offset (Vctrl = 5V)

• Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300


Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298
 Visit www.macomtech.com for additional data sheets and product information.




**Voltage Controlled Oscillator** 9.4 - 10.8 GHz

Preliminary: Rev. V2P

#### Lead Free 5mm 32-Lead PQFN

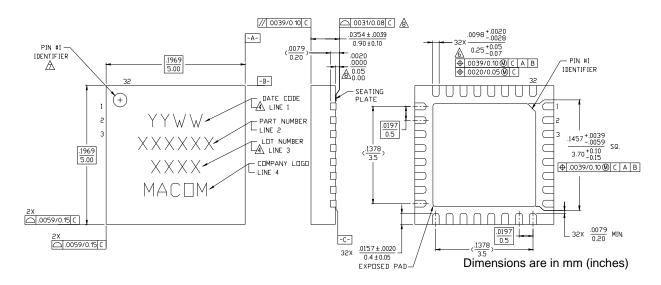

#### Sample Board

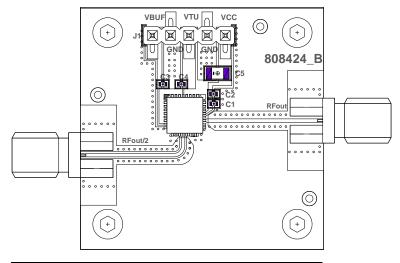

Component	Value	Case Size	Manufacturer
C1, C3, C4	100 pF	0402	Murata
C2	0.1 μF	0402	Murata
C5	10 μF	1206	AVX

Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300

Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298 Visit www.macomtech.com for additional data sheets and product information.