






### **Features**

- **Epitaxial Planar Die Construction**
- Complementary PNP Type Available (2DB1132)
- Ideally Suited for Automated Assembly Processes
- Ideal for Medium Power Switching or Amplification Applications
- Lead Free By Design/RoHS Compliant (Note 1)

# "Green" Device (Note 2) **Mechanical Data**

- Case: SOT89-3L
- Case Material: Molded Plastic, "Green" Molding Compound. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminals: Finish Matte Tin annealed over Copper leadframe (Lead Free Plating). Solderable per MIL-STD-202, Method 208
- Marking & Type Code Information: See Page 3
- Ordering Information: See Page 3
- Weight: 0.072 grams (approximate)



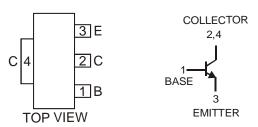

Schematic and Pin Configuration

### Maximum Ratings @T<sub>A</sub> = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit
Collector-Base Voltage	V <sub>CBO</sub>	40	V
Collector-Emitter Voltage	V <sub>CEO</sub>	32	V
Emitter-Base Voltage	V <sub>EBO</sub>	5	V
Peak Pulse Current	I <sub>CM</sub>	2	Α
Continuous Collector Current	Ic	1	A

### **Thermal Characteristics**


Characteristic	Symbol	Value	Unit
Power Dissipation (Note 3) @ T <sub>A</sub> = 25°C	$P_{D}$	1	W
Thermal Resistance, Junction to Ambient Air (Note 3) @ T <sub>A</sub> = 25°C	$R_{ heta JA}$	125	°C/W
Operating and Storage Temperature Range	T <sub>j</sub> , T <sub>STG</sub>	-55 to +150	°C


# **Electrical Characteristics** @T<sub>A</sub> = 25°C unless otherwise specified

Characteristic		Symbol	Min	Тур	Max	Unit	Conditions
OFF CHARACTERISTICS (Note 4)							
Collector-Base Breakdown Voltage		V <sub>(BR)CBO</sub>	40	_	_	V	$I_C = 50 \mu A, I_E = 0$
Collector-Emitter Breakdown Voltage		V <sub>(BR)CEO</sub>	32	_	_	V	$I_C = 1mA, I_B = 0$
Emitter-Base Breakdown Voltage		V <sub>(BR)EBO</sub>	5	_	_	V	$I_E = 50 \mu A, I_C = 0$
Collector Cut-Off Current		I <sub>CBO</sub>	_	_	0.5	μΑ	$V_{CB} = 20V, I_{E} = 0$
Emitter Cut-Off Current		I <sub>EBO</sub>	_	_	0.5	μΑ	$V_{EB} = 4V, I_{C} = 0$
ON CHARACTERISTICS (Note 4)							
Collector-Emitter Saturation Voltage		V <sub>CE(SAT)</sub>	_	0.12	0.4	V	$I_C = 500 \text{mA}, I_B = 50 \text{mA}$
DC Current Gain 2D	2DD1664P	h <sub>FE</sub>	82	_	180	_	
	2DD1664Q		120	_	270	_	$V_{CE} = 3V, I_{C} = 100mA$
	2DD1664R		180	_	390		]
SMALL SIGNAL CHARACTERISTICS							
Transition Frequency		f <sub>T</sub>	_	280	_	MHz	$V_{CE} = 5V$ , $I_{E} = -50mA$ , $f = 100MHz$
Output Capacitance		C <sub>ob</sub>	_	10	_	pF	$V_{CB} = 10V, I_{E} = 0,$ f = 1MHz

- 1. No purposefully added lead.
- 2. Diodes Inc.'s "Green" policy can be found on our website at http://www.diodes.com/products/lead\_free/index.php.
- 3. Device mounted on FR-4 PCB; pad layout as shown on page 4 or in Diodes Inc. suggested pad layout document AP02001, which can be found on our website at http://www.diodes.com/datasheets/ap02001.pdf.
- 4. Measured under pulsed conditions. Pulse width =  $300\mu s$ . Duty cycle  $\leq 2\%$ .



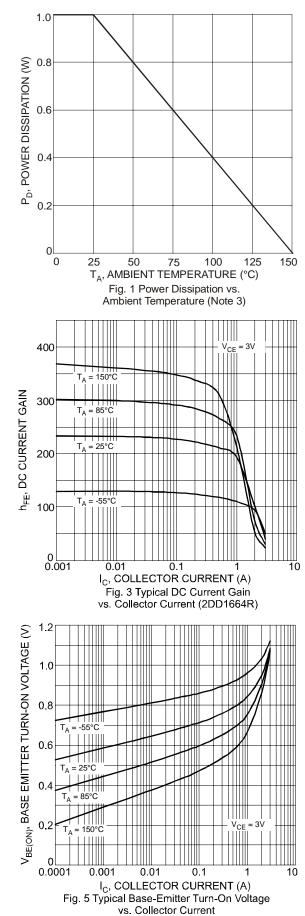

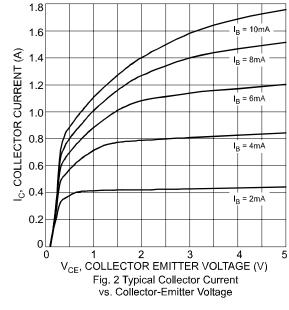

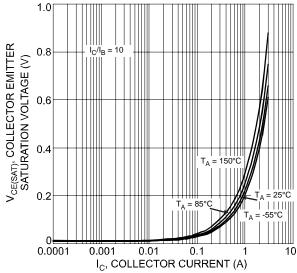


Fig. 4 Typical Collector-Emitter Saturation Voltage vs. Collector Current

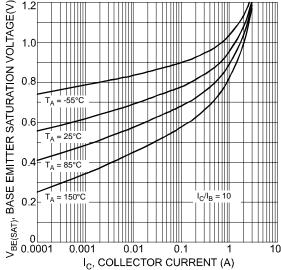
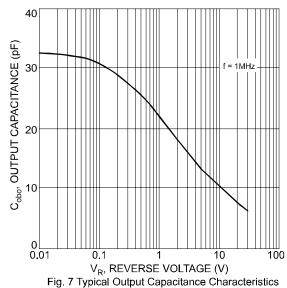


Fig. 6 Typical Base-Emitter Saturation Voltage vs. Collector Current





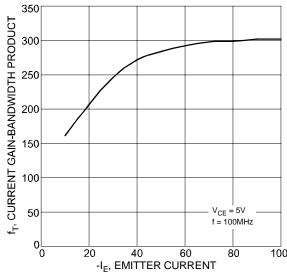



Fig. 8 Typical Gain-Bandwidth Product vs. Emitter Current

# **Ordering Information** (Note 5)

Device	Packaging	Shipping
2DD1664P-13	SOT89-3L	2500/Tape & Reel
2DD1664Q-13	SOT89-3L	2500/Tape & Reel
2DD1664R-13	SOT89-3L	2500/Tape & Reel


Notes: 5. For packaging details, go to our website at http://www.diodes.com/ap02007.pdf.


# **Marking Information**



YWW = Date Code Marking Y = Last digit of year ex: 7 = 2007 WW = Week code 01 - 52

# **Package Outline Dimensions**

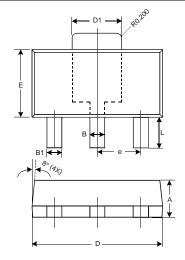




SOT89-3L					
Dim	Min	Max	Тур		
Α	1.40	1.60	1.50		
В	0.45	0.55	0.50		
B1	0.37	0.47	0.42		
C	0.35	0.43	0.38		
D	4.40	4.60	4.50		
D1	1.50	1.70	1.60		
Е	2.40	2.60	2.50		
е	_	_	1.50		
Н	3.95	4.25	4.10		
L	0.90	1.20	1.05		
All Dimensions in mm					



# **Suggested Pad Layout**

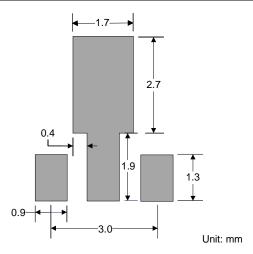

#### IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

#### LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.