


Voltage Controlled Oscillator

P/N: JXWBVCO-S-3450-3550

Center Frequency(GHz)	3.5
Bandwidth(MHz)	100
Tuning Voltage Range(V)	0-5
Tuning Port Capacitor(pf)	50
Phase Noise(dBc/Hz)	-95 @100KHz
Power Supply(V/mA)	+15/200
Power Output(dBm)	10
Power Output Flatness(dBm)	±2
Harmonics(dBc)	-15
Spurious(dBc)	-60
Operating Temperature(°C)	-20 ~ +60

Outline Drawing (Size: mm)

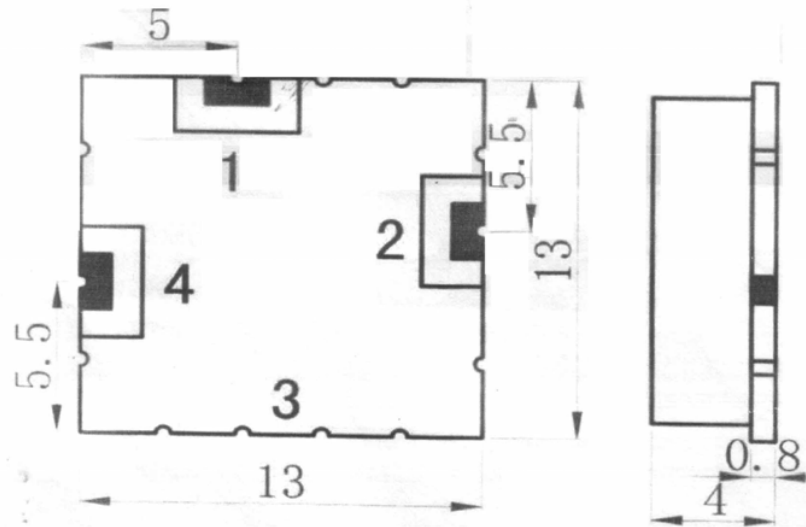

Data subject to change without notice. For current data sheets, please contact: sales@aacix.com