EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.

Technical Data Sheet

TOP View LEDs

Features

- P-LCC-2 package.
- White package.
- Optical indicator.
- Colorless clear window.
- Wide viewing angle.
- Suitable for vapor-phase reflow, Infrared reflow and wave solder processes.
- Computable with automatic placement equipment.
- Available on tape and reel (8mm Tape).
- Pb-free.
- The product itself will remain within RoHS compliant version.

Descriptions

• The 67-21 series is available in soft orange, green,blue and yellow. Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector. This feature makes the ideal for light pipe application. The low current requirement makes this device ideal for portable equipment or any other application where power is at a premium.

Applications

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- Light pipe application.
- General use.

Device Selection Guide

Chip	Emitted Color	Daria Galari		
Material	Emitted Color	Resin Color		
AlGaInP	Brilliant Red	Water Clear		

Everlight Electronics Co., Ltd. Device No. : DSE-671-516 Revision : 1 http://www.everlight.com prepared date:18-Apr-2006 Page: 1 of 10

Prepared by: Teresa Tee Release Date:2008-09-20 00:15:57.0



Expired Period: Forever

Rev. 1




67-21/RSC-T1V1/2T

EVERLIGHT ELECTRONICS CO., LTD.

EVERLIGHT

67-21/RSC-T1V1/2T

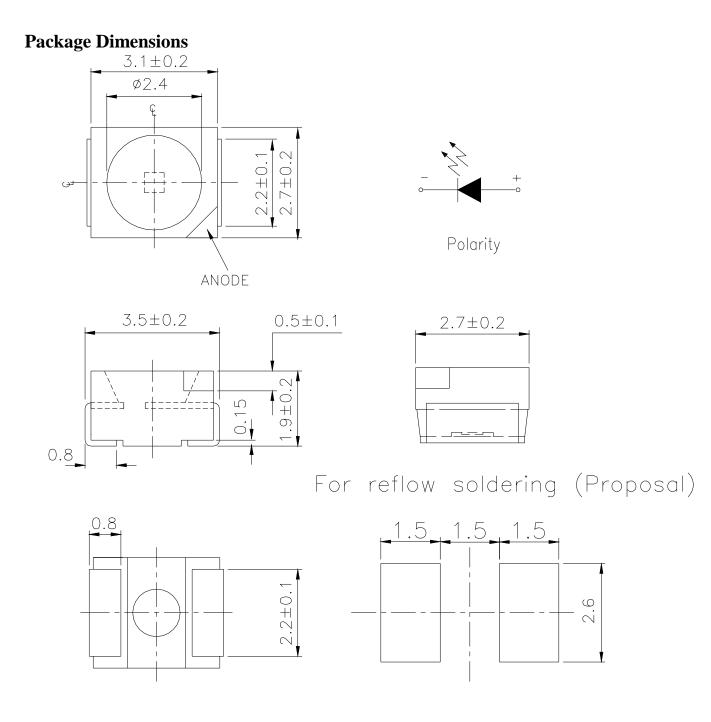

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd.http://www.everlight.comRev. 1Page: 2 of 10Device No. : DSE-671-516prepared date: 18-Apr-2006Prepared by: Teresa TeeRevision : 1repared date: 18-Apr-2006Prepared by: Teresa TeeLifecyclePhase:正式發行Expired Period: Forever

EVERLIGHT ELECTRONICS CO.,LTD.

Absolute Maximum Ratings (Ta=25)

EVERLIGHT

67-21/RSC-T1V1/2T

Absolute Maximum Rating	gs(1a=4	25)						
Parameter		Symbol		Rating			Uni	its
Reverse Voltage		VR			5		V	r
Forward Current		IF		50			mA	4
Operating Temperature		Topr		-40 ~ +85				
Storage Temperature		Tstg		$-40 \sim +100$				
Electrostatic Discharge(HBM)		ESD		150		V	r	
Power Dissipation		Pd		130		mV	N	
Peak Forward Current (Duty 1/10 @1KHz)		Ifp		100			mA	4
Soldering Temperature		Tsol		e e		for 10 s		
Electro-Optical Characteri	istics (T	a=25)						
Parameter	Symbol	Min.	Ty	p.	Max.	Unit	Conditio	on
Luminous intensity	I _V	285		£.]	900	mcd	$I_F = 20 m L$	A
Viewing Angle	201/2		12	20		deg	$I_F=20mL$	A
Peak Wavelength	λp		63	2		nm	$I_F=20mL$	A
Dominant Wavelength	λd		62	24		nm	$I_F=20mL$	A
Spectrum Radiation Bandwidth	λ		20	0		nm	$I_F=20mL$	A
Forward Voltage	$V_{\rm F}$	1.70	2.	0	2.40	V	I _F =20m	A

Notes:

1.Tolerance of Luminous Intensity ±11%

 I_R

Reverse Current

 $V_R=5V$

Prepared by: Teresa Tee Release Date:2008-09-20 00:15:57.0

μΑ

Expired Period: Forever

10

Rev. 1

Bin Rang Of Luminous Intensity

oni Kang Of Lunin	nous mitensity			
Bin	Min	Max	Unit	Condition
T1	285	360		
T2	360	450		
U1	450	565	mcd	IF=20mA
U2	565	715		
V1	715	900		

Notes:

1.Tolerance of Luminous Intensity ±11%



Everlight Electronics Co., Ltd. Device No. : DSE-671-516 Revision : 1 LifecyclePhase:正式發行 http://www.everlight.com

prepared date:18-Apr-2006


Rev. 1 Page: 4 of 10

Prepared by: Teresa Tee Release Date:2008-09-20 00:15:57.0

EVERLIGHT

67-21/RSC-T1V1/2T

Typical Electro-Optical Characteristics Curves

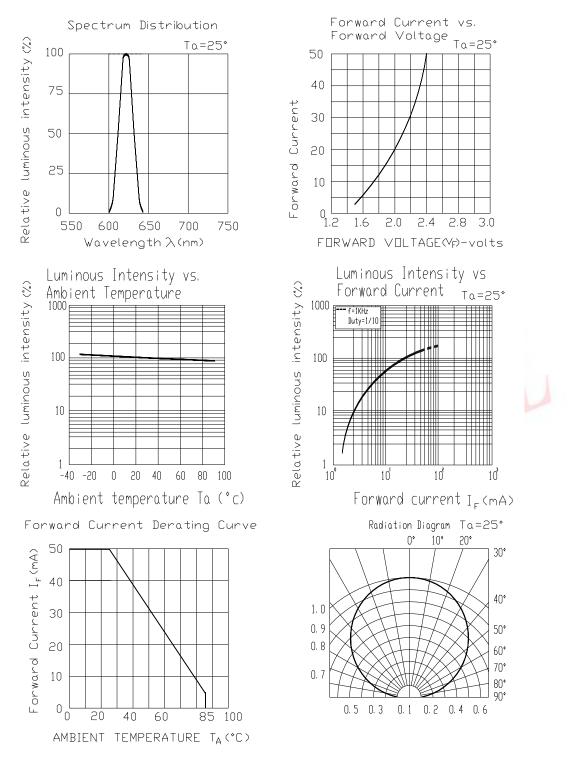

Everlight Electronics Co., Ltd. Device No. : DSE-671-516 Revision : 1 LifecyclePhase:正式發行 http://www.everlight.com prepared date:18-Apr-2006 Rev. 1 Page: 5 of 10

Prepared by: Teresa Tee Release Date:2008-09-20 00:15:57.0


EVERLIGHT ELECTRONICS CO.,LTD.

67-21/RSC-T1V1/2T


Label explanation


everlight

- **CAT: Luminous Intensity Rank**
- HUE: Dom. Wavelength Rank
- **REF: Forward Voltage Rank**



Reel Dimensions

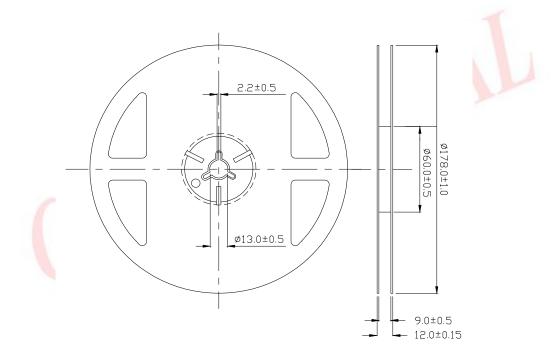




EVERLIGHT ELECTRONICS CO.,LTD.

67-21/RSC-T1V1/2T


Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel.

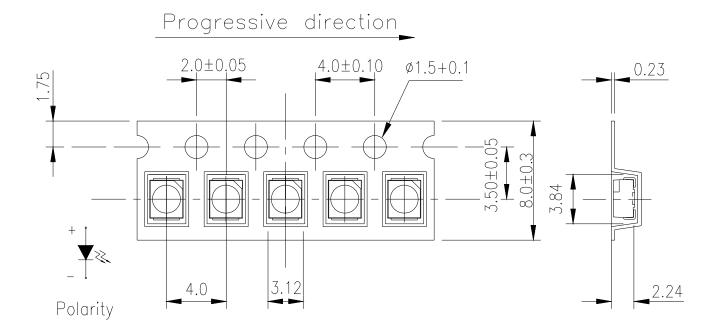

Note: The tolerances unless mentioned is ±0.1mm Unit = mm

Moisture Resistant Packaging

everlight

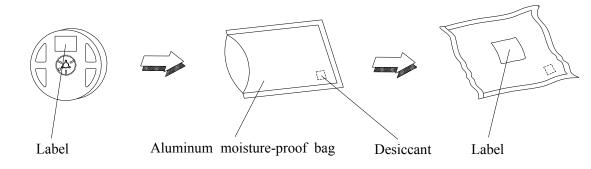

Everlight Electronics Co., Ltd. Device No. : DSE-671-516 Revision : 1 LifecyclePhase:正式發行 http://www.everlight.com

prepared date:18-Apr-2006

Rev. 1 Page: 7 of 10

Prepared by: Teresa Tee Release Date:2008-09-20 00:15:57.0



Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260 ±5 Min. 5sec.	6 min	22 PCS.	0/1
2	Temperature Cycle	H : +100 15min 5 min L : -40 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H : +100 5min 10 sec L : -10 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}/25$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85 / 85%RH	1000 Hrs.	22 PCS.	0/1

Rev. 1 Page: 8 of 10

Prepared by: Teresa Tee Release Date:2008-09-20 00:15:57.0


Precautions For Use

1. Over-current-proof

VERLIGHT

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
 - 2.2 Before opening the package: The LEDs should be kept at 30 or less and 90%RH or less.
 - 2.3 After opening the package: The LED's floor life is 1 year under 30 or less and 60% RH or less.If unused LEDs remain, it should be stored in moisture proof packages.
 - 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.Baking treatment : 60±5 for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

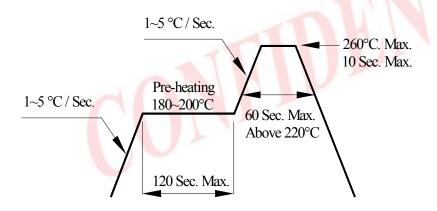


- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350 for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

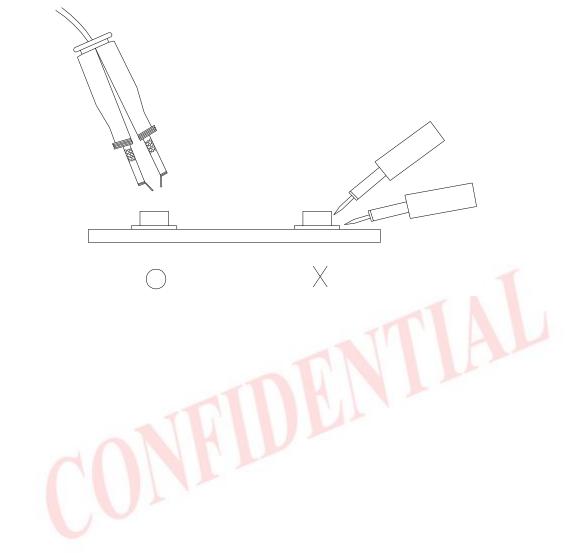

EVERLIGHT ELECTRONICS CO., LTD. Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C *Tel:* 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306 *http://www.everlight.com*

Everlight Electronics Co., Ltd. Device No. : DSE-671-516 Revision : 1 LifecyclePhase:正式發行 http://www.everlight.com

prepared date:18-Apr-2006

Rev. 1 Page: 10 of 10

Prepared by: Teresa Tee Release Date:2008-09-20 00:15:57.0