


# LASERDIODE DRIVER EU-38-1

## TECHNICAL DATA:

- dimension: 35 x 14 mm<sup>2</sup> (+/- 0.5 mm)
- supply voltage: typ. 3.0 - 6.0 VDC
- constant laserdiode current adjustable 0 - 1.2 A (with external heatsink!)
- cw laserpower adjustable with potentiometer

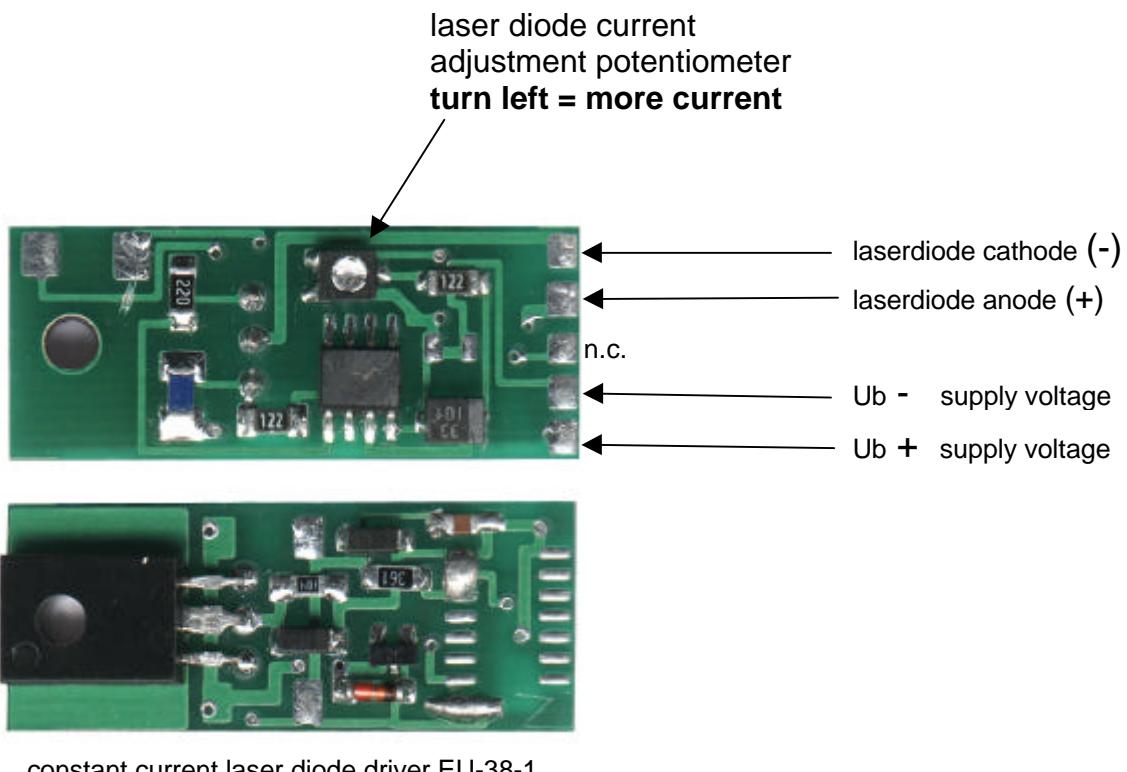

**ROITHNER LASERTECHNIK**

A-1040 WIEN, SCHOENBRUNNER STRASSE 7

TEL: +43 -1- 586 52 43-0 FAX: +43 -1- 586 52 43 - 44

e-mail: [office@roithner-laser.com](mailto:office@roithner-laser.com) <http://www.roithner-laser.com>