


14701 Firestone Blvd * La Mirada, Ca 90638 Phone: (562) 404-4474 * Fax: (562) 404-1773 ssdi@ssdi-power.com * www.ssdi-power.com

Designer's Data Sheet

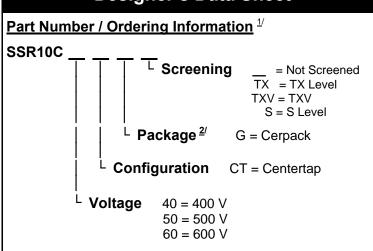


SSR10C60CT Series

10 A / 600 V Schottky Silicon Carbide Centertap Rectifier

FEATURES:

- 600 Volt Silicon Carbide Schottky Rectifier
- Average Output Current 10 Amps
- No Reverse Recovery
- No Forward Recovery
- No Switching Time Change Over Temperature
- Small Package Size
- TX, TXV, and Space Level Screening Available. Consult Factory.

MAXIMUM RATINGS		Symbol	Value	Units
Peak Repetitive and Peak Reverse Voltage	SSR10C40CT SSR10C50CT SSR10C60CT	$oldsymbol{V_{RRM}}{oldsymbol{V_{R}}}$	400 500 600	Volts
Average Rectified Forward Current (Resistive Load, 60 Hz, Sine Wave)	Per Leg Total	lo	5 10	Amps
Peak Surge Current (8.3 ms Pulse, Half Sine Wave, T _A = 25°C, Per Leg)		I _{FSM}	20	Amps
Operating & Storage Temperature		T _{OP} & T _{stg}	-55 to +250	°C
Junction Temperature		TJ	-55 to +250	°C
Maximum Thermal Resistance (Junction to Case)		R _{eJC}	1.5	°C/W

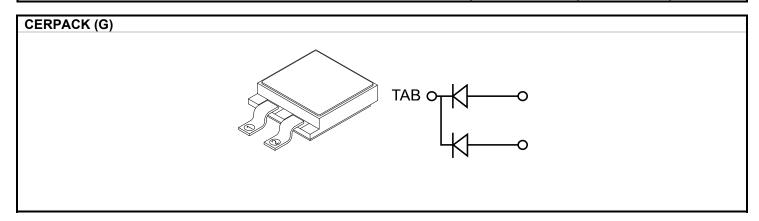



SSR10C60CT Series

14701 Firestone Blvd * La Mirada, Ca 90638 Phone: (562) 404-4474 * Fax: (562) 404-1773 ssdi@ssdi-power.com * www.ssdi-power.com

ELECTRICAL CHARACTERISTICS $^{3/}$	Symbol	Condition	Temperature (T _A)			Units			
			-55°C		25°C		150°C		
			typ.	max	typ.	max	typ.	max	
Instantaneous Forward Voltage Drop (300 - 500 μsec pulse)	V _{F1} V _{F2} V _{F3} V _{F4} V _{F5}	$I_{F} = 2.0 \text{ A}$ $I_{F} = 5.0 \text{ A}$ $I_{F} = 10.0 \text{A}$ $I_{F} = 5.0 \text{ A}$ $I_{F} = 5.0 \text{ A}$	 1.3	 1.8	1.15 1.25 1.5 	1.25 1.55 1.9 	 1.25	 1.8	V _{DC}
Reverse Leakage Current (300 μsec pulse min)	I _{R1} I _{R2}	At rated V _R	-		25 	250 	 50	1000	μΑ
Junction Capacitance	CJ	$V_R = 10V$ f = 1MHz	-		200	350	-		pF

NOTES:

- * Pulse Test: Pulse Width = 300 μsec, Duty Cycle = 2%
- 1/ For Ordering Information, Price, and Availability Contact Factory.
- 2/ For Package Outlines Contact Factory.
- 3/ Unless Otherwise Specified, All Electrical Characteristics @25°C

Available Part Numbers:
SSR10C40CTG
SSR10C50CTG
SSR10C60CTG

PIN ASSIGNMENT					
Package	Pin 1 Pin 2		Pin 3 (Tab)		
Cerpack (G)	Anode	Anode	Cathode		