

TDA7850LV

4 x 50 W quad bridge amplifier suitable for low voltage car radio systems


Data brief

Features

- High output power capability:
 - 4 x 50 W/4 Ω max.
 - 4 x 30 W/4 Ω @ 14.4 V, 1 kHz, 10 %
 - $-4 \times 80 \text{ W/2 } \Omega \text{ max.}$
 - $-4 \times 53 \text{ W/2 } \Omega$ @ 14.4V, 1 kHz, 10 %
- MOSFET output power stage
- Capable to operate in low voltage conditions (e.g.: "Start - Slop")
- \blacksquare Excellent 2 Ω driving capability
- Hi-Fi class distortion
- Low output noise
- Standby function and mute function
- Automute at min. supply voltage detection
- Low external component count:
 - Internally fixed gain (26 dB)
 - No external compensation
 - No bootstrap capacitors
- On board 0.35 A high side driver

Protections:

- Extreme robustness against any kind of short to GND
- Output short circuit to GND, to V_s, across the load
- Very inductive loads
- Overrating chip temperature with soft thermal limiter

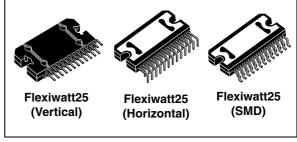

- Output DC offset detection
- Load dump voltage
- Fortuitous open GND
- Reversed battery
- ESD

Description

The TDA7850LV is a MOSFET class AB audio power amplifier, designed for high-power car radio. In addition to the outstanding output current capability and distortion performance, the TDA7850LV is extremely robust against several kinds of fortuitous misconnections.

It is, moreover, compliant to the most recent OEM specifications for low voltage operation (the so called 'start-stop' battery profile during engine stop) and features a very compact design in BCD technology.

The TDA7850LV includes offset detector capability (or high side driver output) and is available in both SMD and standard Flexiwatt packages.


Table 1. Device summary

Order code	Package	Packing
TDA7850LV	Flexiwatt25 (Vertical)	Tube
TDA7850LVH	Flexiwatt25 (Horizontal)	Tube
TDA7850LVSM	Flexiwatt25 (SMD)	Tube
TDA7850LVSMTR	Flexiwatt25 (SMD)	Tape and reel

1 Block and pins description diagrams


1.1 Block diagram

Figure 1. Block diagram

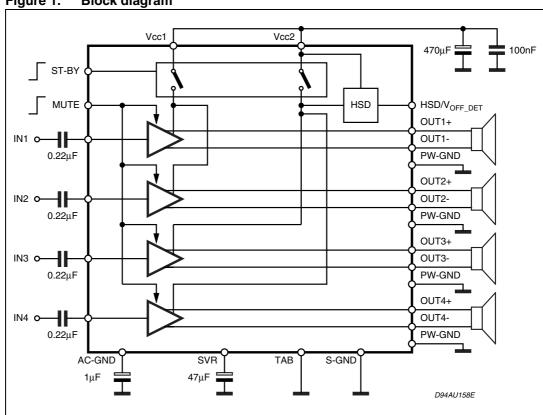

1.2 Pins description diagrams

Pins connection (top view) Figure 2.

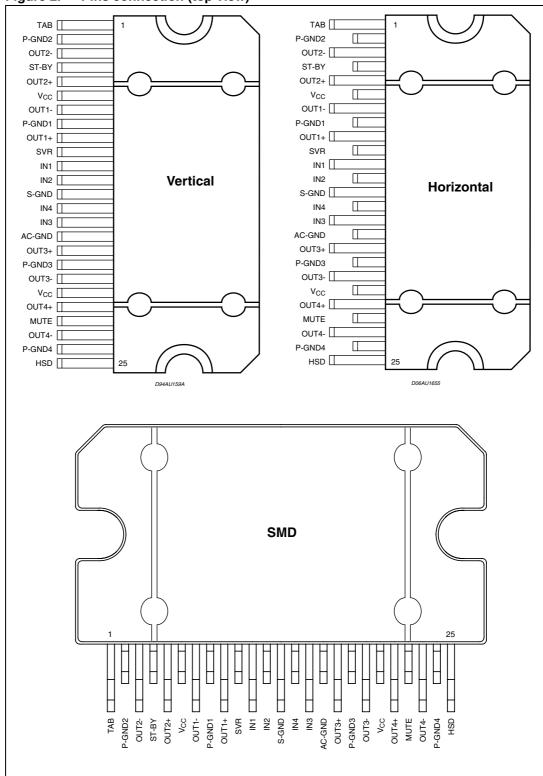


Package information TDA7850LV

2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK[®] packages, depending on their level of environmental compliance. ECOPACK[®] specifications, grade definitions and product status are available at: <u>www.st.com</u>.

 $\mathsf{ECOPACK}^{(\! R \!)}$ is an ST trademark.

Figure 3. Flexiwatt25 (vertical) mechanical data and package dimensions

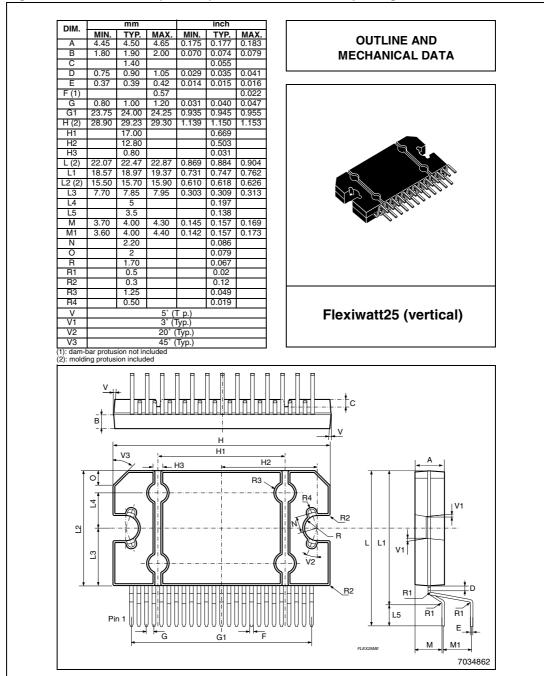

TDA7850LV Package information

Figure 4. Flexiwatt25 (horizontal) mechanical data and package dimensions

	mm		1	inch		
OIM. MIN		MAX.	MIN.	TYP.	MAX.	
A 4.45		4.65	0.175	0.177	0.183	OUTLINE AND
B 1.80		2.00	0.070	0.074	0.079	MECHANICAL DATA
	1.40 2.00	ļ		0.055		
D 0.37		0.42	0.014	0.079	0.016	
(1)	0.00	0.57	0.014	0.013	0.022	
G 0.75	1.00	1.25	0.029	0.040	0.049	
G1 23.7	24.00	24.30	0.933	0.945	0.957	
(2) 28.9		29.30	1.139	1.150	1.153	
11	17.00 12.80	ļ		0.669		
13	0.80			0.031		
(2) 21.6		22.44	0.852	0.868	0.883	
1 10.1		10.85	0.40	0.413	0.427	
2 (2) 15.5		15.90	0.610	0.618	0.626	
.3 7.70		7.95	0.303	0.309	0.313	
.4	5	E 0E	0.202	0.197 0.214	0.00	
.5 5.15 .6 1.80		5.85 2.10	0.203	0.214	0.23	
M 2.75		3.50	0.108	0.077	0.138	
<i>I</i> 11	4.73			0.186	200	V v ·
/ 12	5.61			0.220		
N O O	2.20	0.55	0.455	0.086		
P 3.20	3.50	3.80	0.126	0.138 0.067	0.15	
R1	0.50	}	 	0.067		
R2	0.30	1	l	0.02		
R3	1.25	 		0.049		
R4	0.50			0.02		Flexiwatt25
V		5° (
/1 /2		3° (20° ((Horizontal)
/3			Тур.) Тур.)			
dam-bar pro	tusion not ir			g protusio	n included	•
co		<u> </u>				
P1 27 27 27		H3		H = 1	нг 	

Package information TDA7850LV

Figure 5. Flexiwatt25 (SMD) mechanical data and package dimensions

DIM.		mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	OUTUNE AND
A	4.45	4.50	4.65	0.1752	0.1772	0.1831	OUTLINE AND
В	2.12	2.22	2.32	0.0835	0.0874	0.0913	MECHANICAL DATA
С		1.40			0.0551		
D E	0.36	2.00 0.40	0.44	0.0142	0.0787 0.0157	0.0173	
F**	0.36	0.40	0.44	0.0142	0.0201	0.0173	
G(*)	0.47	1.00	1.25	0.0185	0.0394	0.0224	
G1	23.70	24.00	24.30	0.9331	0.9449	0.9567	
G2(*)	1.75	2.00	2.25	0.0689	0.0787	0.0886	
H(**)	28.85	29.23	29.40	1.1358	1.1508	1.1575	
H1		17.00			0.6693		
H2		12.80			0.5039		
Н3		0.80			0.0315		
L(**)	15.50	15.70	15.90	0.6102	0.6181	0.6260	_
L1	7.70	7.85	7.95	0.3031	0.3091	0.3130	
L2	14.00	14.20	14.40	0.5512	0.5591	0.5669	
L3	11.80	12.00	12.20	0.4646	0.4724	0.4803	
L4	1.30	1.48	1.66	0.0512	0.0583	0.0654	
L5	2.42	2.50	2.58	0.0953	0.0984	0.1016	
L6	0.42	0.50	0.58	0.0165	0.0197	0.0228	
M	-	1.50			0.0591		" Salling .
N N1	1.30	2.20 1.48	1.66	0.0512	0.0866	0.0654	Allo.
N1 N2(*)	2.73	1.48 2.83	2.93	0.0512	0.0583	0.0654	Ť
P(*)	4.73	4.83	4.93	0.1075	0.1114	0.1154	
R		1.70		5002	0.0669		
R1		0.30			0.0118		
R2	0.35	0.40	0.45	0.0138	0.0157	0.0177	
R3	0.35	0.40	0.45	0.0138	0.0157	0.0177	
R4		0.50			0.0197		
T(*)	-0.08		0.10	-0.0031		0.0039	
aaa(*)		0.1			0.0039		
٧		45°			45°		
V1		3*			3*		Flexiwatt25
V2	3"	5"	7"	3.	5*	7"	
V3 V4	12"	15°	18"	12"	15°	18"	(SMD)
V4 V5		20-			20*	-	(52)
Sillo				or protrusio			Detail "A" Rotolad 90" CCW VA QAUGE PLANE SEATING PLANE [S] QAUGE PLANE [S]
	-×			#1 # -	H2-		N2 P
			3	nii da di da nii		THE STREET	\$ 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5
_	Lead#25	1 1 1 1 1 1 1 1	84848	18181	4444	Leac	

6/8

TDA7850LV Revision history

3 Revision history

Table 2. Document revision history

Date	Revision	Changes	
09-Jul-2010	1	Initial release.	
04-Aug-2010	2	Added Section 1: Block and pins description diagrams.	

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2010 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

