


10. SUPER MINI PACKAGE SERIES (TO-236 MOD./SOT-23 MOD.)

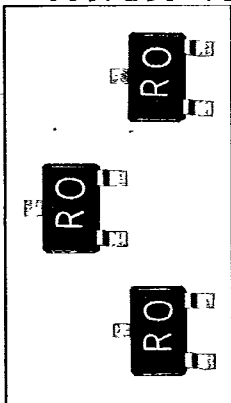

9097250 TOSHIBA (DISCRETE/OPTO)

67C 09147

D T-27-01

➤ TRANSISTOR ◀

Type No.		V _{CEO} (V)	I _C (mA)	P _C (mW)	h _{FE}		V _{CE(sat)} MAX.			f _T TYP. (MIN.)			NF MAX. (TYP.)			
NPN	PNP				V _{CE} (V)	I _C (mA)	V _{CE} (V)	I _C (mA)	V _{CE} (V)	I _B (mA)	I _E (mA)	V _{CE} (V)	(dB)	f _T (MHz)	V _{CE} (V)	I _C (mA)
2SC2712	2SA1162	50	150	150	70~700/400	6	2	0.25/0.3	100	10	10	10	6	0.1	1K	10K
2SC2713	2SA1163	120	100	150	200~700	6	2	0.3	10	1	100	6	0.1	1K	10K	
2SC2859	2SA1182	30	500	150	70~240	1	100	0.25	100	10	300/200	6	-	-	-	
2SC3138	2SA1255	200	50	150	70~240	3	10	0.5	10	2	100	10	-	-	-	
2SC3265	2SA1298	25	800	200	100~320	1	100	0.4	500	20	120	5	-	-	-	
2SC3324	2SA1312	120	100	150	200~700	6	2	0.3	10	1	100	6	0.1	1K	10K	
2SC3325	2SA1313	50	500	150	70~240	1	100	0.25	100	10	300/200	6	-	-	-	
2SC3295		50	150	150	600~3600	6	2	0.25	100	10	250	10	6	0.1	1K	10K
2SC3326		20	300	150	200~1200	2	4	0.3	30	3	30	6	-	-	-	
*2SC3339	*2SA1324	50	150	150	70~700/400	6	2	0.25/0.3	100	10	(80)	10	6	0.1	1K	10K
*2SC3340	*2SA1325	120	100	150	200~700	6	2	0.3	10	1	100	6	6	0.1	1K	10K
*2SC3341	*2SA1326	30	500	200	70~240	1	100	0.25	100	10	300/200	6	-	-	-	
2SC3426	2SA1362	15	800	200	100~400	1	100	0.2	400	8	120	5	-	-	-	
2SC3437		15	200	150	40~240	1	10	0.3	20	1	400	10	-	-	-	

* Base, Emitter Pin Release, TYPE O : 70~140 Y : 120~240 GR : 200~400 BL : 350~700

2SC2632		40	300	150	5000MIN.	5	10	1.5	300	0.3	-	-	-	-	-	-
---------	--	----	-----	-----	----------	---	----	-----	-----	-----	---	---	---	---	---	---

AF AMP. LED Driver Darlington

2SC2714		30	20	100	40~200	6	1	-	-	-	550	6	1	100M	-	-
2SC2715		30	50	150	40~240	12	2	0.4	10	1	(100)	10	-	-	-	-
2SC2716		30	100	150	40~240	12	2	0.4	10	1	(80)	10	2	1M	-	-
2SC2996		30	50	150	40~240	6	1	-	-	-	350	6	1	100M	-	-

FM RF. MIX. OSC AM CONV. FM IF AM RF. CONV. IF FM/AM RF. MIX. OSC