ICL3221, ICL3222, ICL3223, ICL3232, ICL3241, ICL3243

Data Sheet September 2001 File Number 4805.8

1 Microamp Supply-Current, +3V to +5.5V, 250kbps, RS-232 Transmitters/Receivers

The Intersil ICL32XX devices are 3.0V to 5.5V powered RS-232 transmitters/receivers which meet EIA/TIA-232 and V.28/V.24 specifications, even at $V_{CC}=3.0\mathrm{V}$. Targeted applications are PDAs, Palmtops, and notebook and laptop computers where the low operational, and even lower standby, power consumption is critical. Efficient on-chip charge pumps, coupled with manual and automatic powerdown functions (except for the ICL3232), reduce the standby supply current to a $1\mu\mathrm{A}$ trickle. Small footprint packaging, and the use of small, low value capacitors ensure board space savings as well. Data rates greater than 250kbps are guaranteed at worst case load conditions. This family is fully compatible with 3.3V only systems, mixed 3.3V and 5.0V systems, and 5.0V only systems.

The ICL324X are 3 driver, 5 receiver devices that provide a complete serial port suitable for laptop or notebook computers. Both devices also include noninverting always-active receivers for "wake-up" capability.

The ICL3221, ICL3223 and ICL3243, feature an *automatic powerdown* function which powers down the on-chip power-supply and driver circuits. This occurs when an attached peripheral device is shut off or the RS-232 cable is removed, conserving system power automatically without changes to the hardware or operating system. These devices power up again when a valid RS-232 voltage is applied to any receiver input.

Table 1 summarizes the features of the devices represented by this data sheet, while Application Note AN9863 summarizes the features of each device comprising the ICL32XX 3V family.

Features

- Drop in Replacements for MAX3221, MAX3222, MAX3223, MAX3232, MAX3241, MAX3243, SP3243
- ICL3221 is Low Power, Pin Compatible Upgrade for 5V MAX221
- ICL3222 is Low Power, Pin Compatible Upgrade for 5V MAX242, and SP312A
- ICL3232 is Low Power Upgrade for HIN232/ICL232 and Pin Compatible Competitor Devices
- Meets EIA/TIA-232 and V.28/V.24 Specifications at 3V
- · Latch-Up Free
- On-Chip Voltage Converters Require Only Four External 0.1μF Capacitors
- Manual and Automatic Powerdown Features (Except ICL3232)
- Guaranteed Mouse Driveability (ICL324X Only)
- · Receiver Hysteresis For Improved Noise Immunity
- Guaranteed Minimum Data Rate 250kbps
- Guaranteed Minimum Slew Rate 6V/μs
- Wide Power Supply Range Single +3V to +5.5V
- Low Supply Current in Powerdown State.....1μΑ

Applications

- Any System Requiring RS-232 Communication Ports
 - Battery Powered, Hand-Held, and Portable Equipment
 - Laptop Computers, Notebooks, Palmtops
 - Modems, Printers and other Peripherals
 - Digital Cameras
 - Cellular/Mobile Phones

TABLE 1. SUMMARY OF FEATURES


PART NUMBER	NO. OF Tx.	NO. OF Rx.	NO. OF MONITOR Rx. (R _{OUTB})	DATA RATE (kbps)	Rx. ENABLE FUNCTION?	READY OUTPUT?	MANUAL POWER- DOWN?	AUTOMATIC POWERDOWN FUNCTION?
ICL3221	1	1	0	250	YES	NO	YES	YES
ICL3222	2	2	0	250	YES	NO	YES	NO
ICL3223	2	2	0	250	YES	NO	YES	YES
ICL3232	2	2	0	250	NO	NO	NO	NO
ICL3241	3	5	2	250	YES	NO	YES	NO
ICL3243	3	5	1	250	NO	NO	YES	YES

Ordering Information

(NOTE 1) TEMP.						
PART NO.	RANGE (°C)	PACKAGE	PKG. NO.			
ICL3221CA	0 to 70	16 Ld SSOP	M16.209			
ICL3221IA	-40 to 85	16 Ld SSOP	M16.209			
ICL3221CV	0 to 70	16 Ld TSSOP	M16.173			
ICL3222CA	0 to 70	20 Ld SSOP	M20.209			
ICL3222IA	-40 to 85	20 Ld SSOP	M20.209			
ICL3222CB	0 to 70	18 Ld SOIC	M18.3			
ICL3222IB	-40 to 85	18 Ld SOIC	M18.3			
ICL3222CP	0 to 70	18 Ld PDIP	E18.3			
ICL3222CV	0 to 70	20 Ld TSSOP	M20.173			
ICL3222IV	-40 to 85	20 Ld TSSOP	M20.173			
ICL3223CA	0 to 70	20 Ld SSOP	M20.209			
ICL3223IA	-40 to 85	20 Ld SSOP	M20.209			
ICL3223CP	0 to 70	20 Ld PDIP	E20.3			
ICL3223CV	0 to 70	20 Ld TSSOP	M20.173			
ICL3223IV	-40 to 85	20 Ld TSSOP	M20.173			
ICL3232CA	0 to 70	16 Ld SSOP	M16.209			
ICL3232IA	-40 to 85	16 Ld SSOP	M16.209			
ICL3232CB	0 to 70	16 Ld SOIC	M16.3			
ICL3232CBN	0 to 70	16 Ld SOIC (N)	M16.15			

Pinouts

ICL3221 (SSOP, TSSOP) TOP VIEW




Ordering Information (Continued)

(NOTE 1) PART NO.	TEMP. RANGE (°C)	PACKAGE	PKG. NO.
ICL3232IBN	-40 to 85	16 Ld SOIC (N)	M16.15
ICL3232IB	-40 to 85	16 Ld SOIC	M16.3
ICL3232CP	0 to 70	16 Ld PDIP	E16.3
ICL3232CV	0 to 70	16 Ld TSSOP	M16.173
ICL3232IV	-40 to 85	16 Ld TSSOP	M16.173
ICL3241CA	0 to 70	28 Ld SSOP	M28.209
ICL3241IA	-40 to 85	28 Ld SSOP	M28.209
ICL3241CB	0 to 70	28 Ld SOIC	M28.3
ICL3241IB	-40 to 85	28 Ld SOIC	M28.3
ICL3241CV	0 to 70	28 Ld TSSOP	M28.173
ICL3241IV	-40 to 85	28 Ld TSSOP	M28.173
ICL3243CA	0 to 70	28 Ld SSOP	M28.209
ICL3243IA	-40 to 85	28 Ld SSOP	M28.209
ICL3243CB	0 to 70	28 Ld SOIC	M28.3
ICL3243IB	-40 to 85	28 Ld SOIC	M28.3
ICL3243CV	0 to 70	28 Ld TSSOP	M28.173
ICL3243IV	-40 to 85	28 Ld TSSOP	M28.173

NOTE:

1. Most surface mount devices are available on tape and reel; add "-T" to suffix.

ICL3222 (PDIP, SOIC) TOP VIEW




Pinouts (Continued)


ICL3222 (SSOP, TSSOP) TOP VIEW

EN 1 20 SHDN 19 V_{CC} C1+ 2 18 GND V+ 3 17 T1_{OUT} C1-16 R1_{IN} C2+ 15 R1_{OUT} C2- 6 14 NC V-13 T1_{IN} T2_{OUT} 8 12 T2_{IN} R2_{IN} 9 11 NC R2_{OUT} 10


ICL3232 (PDIP, SOIC, SSOP, TSSOP) TOP VIEW




ICL3223 (PDIP, SSOP, TSSOP) TOP VIEW



ICL3241 (SOIC, SSOP, TSSOP) TOP VIEW



ICL3243 (SOIC, SSOP, TSSOP) TOP VIEW




ICL3221, ICL3222, ICL3223, ICL3232, ICL3241, ICL3243


Pin Descriptions


PIN	FUNCTION
V _{CC}	System power supply input (3.0V to 5.5V).
V+	Internally generated positive transmitter supply (+5.5V).
V-	Internally generated negative transmitter supply (-5.5V).
GND	Ground connection.
C1+	External capacitor (voltage doubler) is connected to this lead.
C1-	External capacitor (voltage doubler) is connected to this lead.
C2+	External capacitor (voltage inverter) is connected to this lead.
C2-	External capacitor (voltage inverter) is connected to this lead.
T _{IN}	TTL/CMOS compatible transmitter Inputs.
T _{OUT}	RS-232 level (nominally ±5.5V) transmitter outputs.
R _{IN}	RS-232 compatible receiver inputs.
R _{OUT}	TTL/CMOS level receiver outputs.
R _{OUTB}	TTL/CMOS level, noninverting, always enabled receiver outputs.
ĪNVALID	Active low output that indicates if no valid RS-232 levels are present on any receiver input.
EN	Active low receiver enable control; doesn't disable R _{OUTB} outputs.
SHDN	Active low input to shut down transmitters and on-board power supply, to place device in low power mode.
FORCEOFF	Active low to shut down transmitters and on-chip power supply. This overrides any automatic circuitry and FORCEON (see Table 2).
FORCEON	Active high input to override automatic powerdown circuitry thereby keeping transmitters active. (FORCEOFF must be high).

Typical Operating Circuits




NOTE: THE NEGATIVE TERMINAL OF $\ensuremath{\text{C}}_3$ CAN BE CONNECTED TO EITHER $\ensuremath{\text{V}}_{CC}$ OR GND

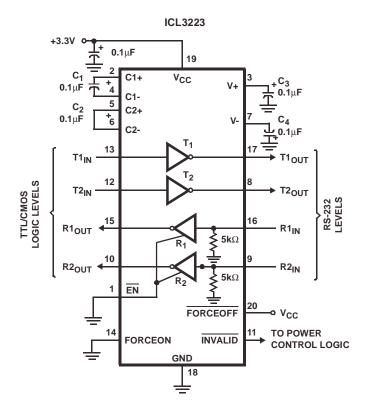

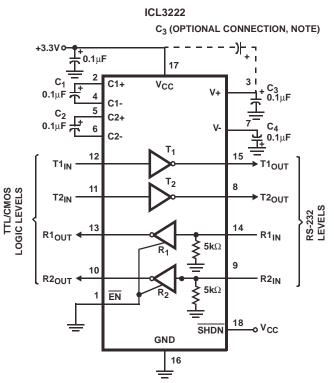

NOTE: THE NEGATIVE TERMINAL OF $\ensuremath{\text{C}}_3$ CAN BE CONNECTED TO EITHER $\ensuremath{\text{V}}_{\text{CC}}$ OR GND


ICL3232

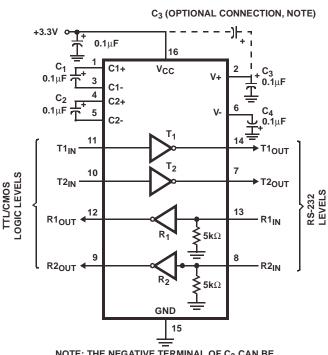

NOTE: THE NEGATIVE TERMINAL OF C₃ CAN BE CONNECTED TO EITHER V_{CC} OR GND

5

Typical Operating Circuits (Continued)

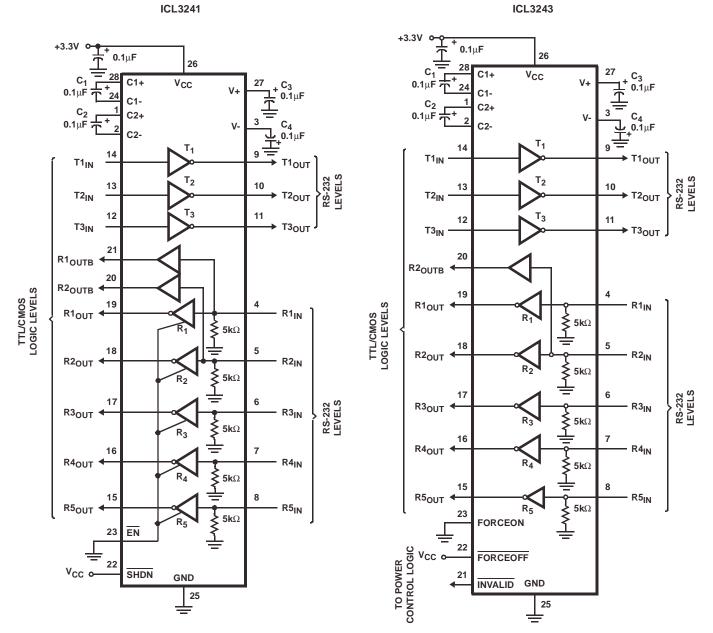

ICL3221, ICL3222, ICL3223, ICL3232, ICL3241, ICL3243

Absolute Maximum Ratings Thermal Information θ_{JA} (°C/W) V_{CC} to Ground.....-0.3V to 6V Thermal Resistance (Typical, Note 2) V+ to Ground -0.3V to 7V 16 Ld PDIP Package 90 V- to Ground. +0.3V to -7V 20 Ld PDIP Package 77 Input Voltages 100 T_{IN}, FORCEOFF, FORCEON, EN, SHDN -0.3V to 6V 16 Ld Narrow SOIC Package..... 115 75 **Output Voltages** 135 R_{OUT}, INVALID. -0.3V to V_{CC} +0.3V 122 **Short Circuit Duration** 16 Ld TSSOP Package T_{OUT} Continuous 20 Ld TSSOP Package ESD Rating See Specification Table 28 Ld SSOP and TSSOP Packages Moisture Sensitivity (see Technical Brief TB363)

Operating Conditions

Temperature Range	
ICL32XXCX	
ICL32XXIX	40°C to 85°C

(SOIC, SSOP, TSSOP - Lead Tips Only)

Maximum Storage Temperature Range......-.65°C to 150°C Maximum Lead Temperature (Soldering 10s)..............300°C

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

NOTE:

2. θ_{JA} is measured with the component mounted on a low effective thermal conductivity test board in free air. See Tech Brief TB379 for details.

Electrical Specifications Test Conditions: $V_{CC} = 3V$ to 5.5V, $C_1 - C_4 = 0.1 \mu F$; Unless Otherwise Specified. Typicals are at $T_A = 25^{O}C$

PARAMETER	TEST CONDI	TIONS	TEMP (°C)	MIN	TYP	MAX	UNITS
DC CHARACTERISTICS			` ,				
Supply Current, Automatic Powerdown	All R _{IN} Open, FORCEON = GND, (ICL3221, ICL3223, ICL3243 Only		25	-	1.0	10	μΑ
Supply Current, Powerdown	FORCEOFF = SHDN = GND (Exc	cept ICL3232)	25	-	1.0	10	μА
Supply Current, Automatic Powerdown Disabled	All Outputs Unloaded, FORCEON = FORCEOFF =	V _{CC} = 3.15V, ICL3221-32	25	-	0.3	1.0	mA
	SHDN = V _{CC}	V _{CC} = 3.0V, ICL3241-43	25	-	0.3	1.0	mA
LOGIC AND TRANSMITTER INPU	JTS AND RECEIVER OUTPUTS						-
Input Logic Threshold Low	T _{IN} , FORCEON, FORCEOFF, EN	I, SHDN	Full	-	-	0.8	V
Input Logic Threshold High	T _{IN} , FORCEON, FORCEOFF, EN, SHDN	V _{CC} = 3.3V	Full	2.0	-	-	V
		V _{CC} = 5.0V	Full	2.4	-	-	V
Input Leakage Current	T _{IN} , FORCEON, FORCEOFF, EN	, SHDN	Full	-	±0.01	±1.0	μА
Output Leakage Current (Except ICL3232)	FORCEOFF = GND or EN = V _{CC}		Full	-	±0.05	±10	μА
Output Voltage Low	I _{OUT} = 1.6mA		Full	-	-	0.4	V
Output Voltage High	I _{OUT} = -1.0mA		Full	V _{CC} -0.6	V _{CC} -0.1	-	V
AUTOMATIC POWERDOWN (ICL	.3221, ICL3223, ICL3243 Only, FOI	RCEON = GND, FORCEOF	F = V _{CC})			
Receiver Input Thresholds to Enable Transmitters	ICL32XX Powers Up (See Figure 6)	Full	-2.7	-	2.7	V
Receiver Input Thresholds to Disable Transmitters	ICL32XX Powers Down (See Figure 6)			-0.3	-	0.3	V
INVALID Output Voltage Low	I _{OUT} = 1.6mA			-	-	0.4	V
INVALID Output Voltage High	I _{OUT} = -1.0mA		Full	V _{CC} -0.6	-	-	V
Receiver Threshold to Transmitters Enabled Delay (t _{WU})			25	-	100	-	μs

ICL3221, ICL3222, ICL3223, ICL3232, ICL3241, ICL3243

Electrical Specifications

Test Conditions: V $_{CC}$ = 3V to 5.5V, C $_1$ - C $_4$ = 0.1 $\mu F;$ Unless Otherwise Specified. Typicals are at T $_A$ = 25 ^{o}C (Continued)

PARAMETER	TEST CONDI	TEMP (°C)	MIN	TYP	MAX	UNITS	
Receiver Positive or Negative Threshold to INVALID High Delay (t _{INVH})			25	-	1	-	μѕ
Receiver Positive or Negative Threshold to INVALID Low Delay (t _{INVL})			25	-	30	-	μs
RECEIVER INPUTS							
Input Voltage Range			Full	-25	-	25	V
Input Threshold Low	V _{CC} = 3.3V		25	0.6	1.2	-	V
	V _{CC} = 5.0V		25	0.8	1.5	-	V
Input Threshold High	V _{CC} = 3.3V		25	-	1.5	2.4	V
	V _{CC} = 5.0V		25	-	1.8	2.4	V
Input Hysteresis			25	-	0.3	-	V
Input Resistance			25	3	5	7	kΩ
TRANSMITTER OUTPUTS	1						
Output Voltage Swing	All Transmitter Outputs Loaded w	All Transmitter Outputs Loaded with 3kΩ to Ground				-	V
Output Resistance	V _{CC} = V+ = V- = 0V, Transmitter 0	Full	300	10M	-	Ω	
Output Short-Circuit Current		Full	-	±35	±60	mA	
Output Leakage Current	$V_{OUT} = \pm 12V$, $V_{CC} = 0V$ or $3V$ to Automatic Powerdown or FORCE	5.5V OFF = SHDN = GND	Full	-	-	±25	μА
MOUSE DRIVEABILITY (ICL324)	(Only)			1	1	1	-
Transmitter Output Voltage (See Figure 9)	$T1_{IN} = T2_{IN} = GND, T3_{IN} = V_{CC},$ GND, $T1_{OUT}$ and $T2_{OUT}$ Loaded		Full	±5	-	-	V
TIMING CHARACTERISTICS						-	-
Maximum Data Rate	$R_L = 3k\Omega$, $C_L = 1000pF$, One Tran	nsmitter Switching	Full	250	500	-	kbps
Receiver Propagation Delay	Receiver Input to Receiver	t _{PHL}	25	-	0.3	-	μs
	Output, $C_L = 150pF$	t _{PLH}	25	-	0.3	-	μs
Receiver Output Enable Time	Normal Operation (Except ICL323	2)	25	-	200	-	ns
Receiver Output Disable Time	Normal Operation (Except ICL323	(2)	25	-	200	-	ns
Transmitter Skew	t _{PHL} - t _{PLH}		Full	-	200	1000	ns
Receiver Skew	t _{PHL} - t _{PLH}		Full	-	100	500	ns
Transition Region Slew Rate	V _{CC} = 3.3V,	C _L = 200pF to 2500pF	25	4	8.0	30	V/µs
	$R_L = 3k\Omega \text{ to } 7k\Omega,$ Measured From 3V to -3V or -3V to 3V	C _L = 200pF to 1000pF	25	6	-	30	V/µs
ESD PERFORMANCE		1	-	1	1	1	-
RS-232 Pins (T _{OUT} , R _{IN})	Human Body Model	ICL3221 - ICL3243	25	-	>±8	-	kV
	IEC1000-4-2 Contact Discharge	ICL3221 - ICL3243	25	-	±8	-	kV
	IEC1000-4-2 Air Gap Discharge	ICL3221 - ICL3232	25	-	±8	-	kV
		ICL3241 - ICL3243	25	-	±6	-	kV
All Other Pins	Human Body Model	ICL3221 - ICL3243	25	-	±2	-	kV

Detailed Description

ICL32XX interface ICs operate from a single +3V to +5.5V supply, guarantee a 250kbps minimum data rate, require only four small external $0.1\mu F$ capacitors, feature low power consumption, and meet all EIA RS-232C and V.28 specifications. The circuit is divided into three sections: The charge pump, the transmitters, and the receivers.

Charge-Pump

Intersil's new ICL32XX family utilizes regulated on-chip dual charge pumps as voltage doublers, and voltage inverters to generate $\pm 5.5 V$ transmitter supplies from a V_{CC} supply as low as 3.0V. This allows these devices to maintain RS-232 compliant output levels over the $\pm 10\%$ tolerance range of 3.3V powered systems. The efficient on-chip power supplies require only four small, external 0.1µF capacitors for the voltage doubler and inverter functions at $V_{CC}=3.3 V$. See the "Capacitor Selection" section, and Table 3 for capacitor recommendations for other operating conditions. The charge pumps operate discontinuously (i.e., they turn off as soon as the V+ and V- supplies are pumped up to the nominal values), resulting in significant power savings.

Transmitters

The transmitters are proprietary, low dropout, inverting drivers that translate TTL/CMOS inputs to EIA/TIA-232 output levels. Coupled with the on-chip ± 5.5 V supplies, these transmitters deliver true RS-232 levels over a wide range of single supply system voltages.

Except for the ICL3232, all transmitter outputs disable and assume a high impedance state when the device enters the powerdown mode (see Table 2). These outputs may be driven to ±12V when disabled.

All devices guarantee a 250kbps data rate for full load conditions (3k Ω and 1000pF), V_{CC} \geq 3.0V, with one transmitter operating at full speed. Under more typical conditions of V_{CC} \geq 3.3V, R_L = 3k Ω , and C_L = 250pF, one transmitter easily operates at 900kbps.

Transmitter inputs float if left unconnected, and may cause I_{CC} increases. Connect unused inputs to GND for the best performance.

Receivers

All the ICL32XX devices contain standard inverting receivers that tristate (except for the ICL3232) via the \overline{EN} or $\overline{FORCEOFF}$ control lines. Additionally, the two ICL324X products include noninverting (monitor) receivers (denoted by the R_{OUTB} label) that are always active, regardless of the state of any control lines. All the receivers convert RS-232 signals to CMOS output levels and accept inputs up to $\pm 25 \text{V}$ while presenting the required $3 \text{k}\Omega$ to $7 \text{k}\Omega$ input impedance (see Figure 1) even if the power is off (V $_{CC}$ = 0V). The receivers' Schmitt trigger input stage uses hysteresis to increase noise immunity and decrease errors due to slow input signal transitions.

The ICL3221/22/23/41 inverting receivers disable only when EN is driven high. ICL3243 receivers disable during forced (manual) powerdown, but not during automatic powerdown (see Table 2).

ICL324X monitor receivers remain active even during manual powerdown and forced receiver disable, making them extremely useful for Ring Indicator monitoring. Standard receivers driving powered down peripherals must be disabled to prevent current flow through the peripheral's protection diodes (see Figures 2 and 3). This renders them useless for wake up functions, but the corresponding monitor receiver can be dedicated to this task as shown in Figure 3.




FIGURE 1. INVERTING RECEIVER CONNECTIONS

Low Power Operation

These 3V devices require a nominal supply current of 0.3mA, even at $V_{\rm CC}$ = 5.5V, during normal operation (not in powerdown mode). This is considerably less than the 5mA to 11mA current required by comparable 5V RS-232 devices, allowing users to reduce system power simply by switching to this new family.

Pin Compatible Replacements For 5V Devices

The ICL3221/22/32 are pin compatible with existing 5V RS-232 transceivers - see the "Features" section on the front page for details.

This pin compatibility coupled with the low Icc and wide operating supply range, make the ICL32XX potential lower power, higher performance drop-in replacements for existing 5V applications. As long as the ±5V RS-232 output swings are acceptable, and transmitter input pull-up resistors aren't required, the ICL32XX should work in most 5V applications.

When replacing a device in an existing 5V application, it is acceptable to terminate C_3 to V_{CC} as shown on the "Typical Operating Circuit". Nevertheless, terminate C_3 to GND if possible, as slightly better performance results from this configuration.

Powerdown Functionality (Except ICL3232)

The already low current requirement drops significantly when the device enters powerdown mode. In powerdown, supply current drops to $1\mu A$, because the on-chip charge pump turns off (V+ collapses to V_{CC} , V- collapses to GND), and the transmitter outputs tristate. Inverting receiver outputs may or may not disable in powerdown; refer to Table 2 for details. This micro-power mode makes these devices ideal for battery powered and portable applications.

Software Controlled (Manual) Powerdown

ICL3221, ICL3222, ICL3223, ICL3232, ICL3241, ICL3243

Most devices in the ICL32XX family provide pins that allow the user to force the IC into the low power, standby state.

On the ICL3222 and ICL3241, the powerdown control is via a simple shutdown (\overline{SHDN}) pin. Driving this pin high enables normal operation, while driving it low forces the IC into it's powerdown state. Connect \overline{SHDN} to V_{CC} if the powerdown function isn't needed. Note that all the receiver outputs remain enabled during shutdown (see Table 2). For the lowest power consumption during powerdown, the receivers should also be disabled by driving the \overline{EN} input high (see next section, and Figures 2 and 3).

The ICL3221, ICL3223, and ICL3243 utilize a two pin approach where the FORCEON and $\overline{\text{FORCEOFF}}$ inputs

determine the IC's mode. For always enabled operation, FORCEON and FORCEOFF are both strapped high. To switch between active and powerdown modes, under logic or software control, only the FORCEOFF input need be driven. The FORCEON state isn't critical, as FORCEOFF dominates over FORCEON. Nevertheless, if strictly manual control over powerdown is desired, the user must strap FORCEON high to disable the automatic powerdown circuitry. Inverting (standard) receiver outputs also disable when the device is in powerdown, thereby eliminating the possible current path through a shutdown peripheral's input protection diode (see Figures 2 and 3).

TABLE 2. POWERDOWN AND ENABLE LOGIC TRUTH TABLE

RS-232 SIGNAL PRESENT AT RECEIVER INPUT?	FORCEOFF OR SHDN INPUT	FORCEON INPUT	EN INPUT	TRANSMITTER OUTPUTS	RECEIVER OUTPUTS	(NOTE 3) ROUTB OUTPUTS	INVALID OUTPUT	MODE OF OPERATION
N.A.	L	N.A.	L	High-Z	Active	Active	N.A.	Manual Powerdown
N.A.	L	N.A.	Н	High-Z	High-Z	Active	N.A.	Manual Powerdown w/Rcvr. Disabled
N.A.	H	N.A.		Active	Active	Active	N.A.	Normal Operation
N.A.	Н	N.A.	Н	Active	High-Z	Active	N.A.	Normal Operation w/Rcvr. Disabled
ICL3221, ICL3		14.74.	- ' '	7101170	111911 2	7101170	14.7 (.	Normal Operation W/Novi. Bioabica
NO	Н	Н	L	Active	Active	N.A.	L	Normal Operation
NO	Н	Н	Н	Active	High-Z	N.A.	L	(Auto Powerdown Disabled)
YES	Н	L	L	Active	Active	N.A.	Н	Normal Operation
YES	Н	L	Н	Active	High-Z	N.A.	Н	(Auto Powerdown Enabled)
NO	Н	L	L	High-Z	Active	N.A.	L	Powerdown Due to Auto Powerdown
NO	Н	L	Н	High-Z	High-Z	N.A.	L	Logic
YES	L	Х	L	High-Z	Active	N.A.	Н	Manual Powerdown
YES	L	Х	Н	High-Z	High-Z	N.A.	Н	Manual Powerdown w/Rcvr. Disabled
NO	L	Х	L	High-Z	Active	N.A.	L	Manual Powerdown
NO	L	Х	Н	High-Z	High-Z	N.A.	L	Manual Powerdown w/Rcvr. Disabled
ICL3243								
NO	Н	Н	N.A.	Active	Active	Active	L	Normal Operation (Auto Powerdown Disabled)
YES	Н	L	N.A.	Active	Active	Active	Н	Normal Operation (Auto Powerdown Enabled)
NO	Н	L	N.A.	High-Z	Active	Active	L	Powerdown Due to Auto Powerdown Logic
YES	L	Х	N.A.	High-Z	High-Z	Active	Н	Manual Powerdown
NO	L	Х	N.A.	High-Z	High-Z	Active	L	Manual Powerdown

NOTE:

^{3.} Applies only to the ICL3241 and ICL3243.

The INVALID output always indicates whether or not a valid RS-232 signal is present at any of the receiver inputs (see Table 2), giving the user an easy way to determine when the interface block should power down. In the case of a disconnected interface cable where all the receiver inputs are floating (but pulled to GND by the internal receiver pull down resistors), the INVALID logic detects the invalid levels and drives the output low. The power management logic then uses this indicator to power down the interface block. Reconnecting the cable restores valid levels at the receiver inputs, INVALID switches high, and the power management logic wakes up the interface block. INVALID can also be used to indicate the DTR or RING INDICATOR signal, as long as the other receiver inputs are floating, or driven to GND (as in the case of a powered down driver). Connecting FORCEOFF and FORCEON together disables the automatic powerdown feature, enabling them to function as a manual SHUTDOWN input (see Figure 4).




FIGURE 2. POWER DRAIN THROUGH POWERED DOWN PERIPHERAL




FIGURE 3. DISABLED RECEIVERS PREVENT POWER DRAIN




FIGURE 4. CONNECTIONS FOR MANUAL POWERDOWN WHEN NO VALID RECEIVER SIGNALS ARE

With any of the above control schemes, the time required to exit powerdown, and resume transmission is only $100\mu s$. A mouse, or other application, may need more time to wake up from shutdown. If automatic powerdown is being utilized, the RS-232 device will reenter powerdown if valid receiver levels aren't reestablished within $30\mu s$ of the ICL32XX powering up. Figure 5 illustrates a circuit that keeps the ICL32XX from initiating automatic powerdown for 100ms after powering up. This gives the slow-to-wake peripheral circuit time to reestablish valid RS-232 output levels.




FIGURE 5. CIRCUIT TO PREVENT AUTO POWERDOWN FOR 100ms AFTER FORCED POWERUP

Automatic Powerdown (ICL3221/23/43 Only)

Even greater power savings is available by using the devices which feature an automatic powerdown function. When no valid RS-232 voltages (see Figure 6) are sensed on any receiver input for $30\mu s$, the charge pump and transmitters powerdown, thereby reducing supply current to $1\mu A$. Invalid receiver levels occur whenever the driving peripheral's outputs are shut off (powered down) or when the RS-232 interface cable is disconnected. The ICL32XX powers back up whenever it detects a valid RS-232 voltage level on any receiver input. This automatic powerdown feature provides additional system power savings without changes to the existing operating system.



FIGURE 6. DEFINITION OF VALID RS-232 RECEIVER LEVELS

Automatic powerdown operates when the FORCEON input is low, and the FORCEOFF input is high. Tying FORCEON high disables automatic powerdown, but manual powerdown is always available via the overriding FORCEOFF input.

Table 2 summarizes the automatic powerdown functionality.

Devices with the automatic powerdown feature include an $\overline{\text{INVALID}}$ output signal, which switches low to indicate that invalid levels have persisted on all of the receiver inputs for more than 30µs (see Figure 7). $\overline{\text{INVALID}}$ switches high 1µs after detecting a valid RS-232 level on a receiver input. $\overline{\text{INVALID}}$ operates in all modes (forced or automatic powerdown, or forced on), so it is also useful for systems employing manual powerdown circuitry. When automatic powerdown is utilized, $\overline{\text{INVALID}} = 0$ indicates that the ICL32XX is in powerdown mode.




FIGURE 7. AUTOMATIC POWERDOWN AND INVALID TIMING DIAGRAMS

The time to recover from automatic powerdown mode is typically $100\mu s$.

Receiver ENABLE Control (ICL3221/22/23/41 Only)

Several devices also feature an $\overline{\text{EN}}$ input to control the receiver outputs. Driving $\overline{\text{EN}}$ high disables all the inverting (standard) receiver outputs placing them in a high impedance state. This is useful to eliminate supply current,

due to a receiver output forward biasing the protection diode, when driving the input of a powered down ($V_{CC} = GND$) peripheral (see Figure 2). The enable input has no effect on transmitter nor monitor (R_{OUTB}) outputs.

Capacitor Selection

The charge pumps require $0.1\mu F$ capacitors for 3.3V operation. For other supply voltages refer to Table 3 for capacitor values. Do not use values smaller than those listed in Table 3. Increasing the capacitor values (by a factor of 2) reduces ripple on the transmitter outputs and slightly reduces power consumption. C_2 , C_3 , and C_4 can be increased without increasing C_1 's value, however, do not increase C_1 without also increasing C_2 , C_3 , and C_4 to maintain the proper ratios (C_1 to the other capacitors).

When using minimum required capacitor values, make sure that capacitor values do not degrade excessively with temperature. If in doubt, use capacitors with a larger nominal value. The capacitor's equivalent series resistance (ESR) usually rises at low temperatures and it influences the amount of ripple on V+ and V-.

TABLE 3. REQUIRED CAPACITOR VALUES

V _{CC} (V)	C ₁ (μF)	C ₂ , C ₃ , C ₄ (μF)
3.0 to 3.6	0.1	0.1
4.5 to 5.5	0.047	0.33
3.0 to 5.5	0.1	0.47

Power Supply Decoupling

In most circumstances a $0.1\mu F$ bypass capacitor is adequate. In applications that are particularly sensitive to power supply noise, decouple V_{CC} to ground with a capacitor of the same value as the charge-pump capacitor C_1 . Connect the bypass capacitor as close as possible to the IC.

Transmitter Outputs when Exiting Powerdown

Figure 8 shows the response of two transmitter outputs when exiting powerdown mode. As they activate, the two transmitter outputs properly go to opposite RS-232 levels, with no glitching, ringing, nor undesirable transients. Each transmitter is loaded with $3k\Omega$ in parallel with 2500pF. Note that the transmitters enable only when the magnitude of the supplies exceed approximately 3V.




FIGURE 8. TRANSMITTER OUTPUTS WHEN EXITING POWERDOWN

Mouse Driveability

The ICL324X have been specifically designed to power a serial mouse while operating from low voltage supplies. Figure 9 shows the transmitter output voltages under increasing load current. The on-chip switching regulator ensures the transmitters will supply at least $\pm 5 \text{V}$ during worst case conditions (15mA for paralleled V+ transmitters, 7.3mA for single V- transmitter). The Automatic Powerdown feature does not work with a mouse, so FORCEOFF and FORCEON should be connected to VCC.




FIGURE 9. TRANSMITTER OUTPUT VOLTAGE vs LOAD
CURRENT (PER TRANSMITTER, i.e., DOUBLE
CURRENT AXIS FOR TOTAL V_{OUT+} CURRENT)

High Data Rates

The ICL32XX maintain the RS-232 \pm 5V minimum transmitter output voltages even at high data rates. Figure 10 details a transmitter loopback test circuit, and Figure 11 illustrates the loopback test result at 120kbps. For this test, all transmitters were simultaneously driving RS-232 loads in parallel with 1000pF, at 120kbps. Figure 12 shows the loopback results for a single transmitter driving 1000pF and an RS-232 load

at 250kbps. The static transmitters were also loaded with an RS-232 receiver.




FIGURE 10. TRANSMITTER LOOPBACK TEST CIRCUIT




FIGURE 11. LOOPBACK TEST AT 120kbps




FIGURE 12. LOOPBACK TEST AT 250kbps

Interconnection with 3V and 5V Logic

The ICL32XX directly interface with 5V CMOS and TTL logic families. Nevertheless, with the ICL32XX at 3.3V, and the logic supply at 5V, AC, HC, and CD4000 outputs can drive ICL32XX inputs, but ICL32XX outputs do not reach the minimum $\rm V_{IH}$ for these logic families. See Table 4 for more information

TABLE 4. LOGIC FAMILY COMPATIBILITY WITH VARIOUS SUPPLY VOLTAGES

SYSTEM POWER-SUPPLY VOLTAGE (V)	V _{CC} SUPPLY VOLTAGE (V)	COMPATIBILITY
3.3	3.3	Compatible with all CMOS families.
5	5	Compatible with all TTL and CMOS logic families.
5	3.3	Compatible with ACT and HCT CMOS, and with TTL. ICL32XX outputs are incompatible with AC, HC, and CD4000 CMOS inputs.

Typical Performance Curves V_{CC} = 3.3V, T_A = 25°C




FIGURE 13. TRANSMITTER OUTPUT VOLTAGE vs LOAD CAPACITANCE




FIGURE 15. SUPPLY CURRENT VS LOAD CAPACITANCE WHEN TRANSMITTING DATA




FIGURE 14. SLEW RATE vs LOAD CAPACITANCE




FIGURE 16. SUPPLY CURRENT vs LOAD CAPACITANCE WHEN TRANSMITTING DATA

Typical Performance Curves $V_{CC} = 3.3V$, $T_A = 25^{\circ}C$ (Continued)




FIGURE 17. SUPPLY CURRENT VS LOAD CAPACITANCE WHEN TRANSMITTING DATA




FIGURE 18. SUPPLY CURRENT vs SUPPLY VOLTAGE

Die Characteristics

DIE DIMENSIONS:

ICL3221:

73 mils x 91 mils (1850μm x 2300μm)

ICL3222/23/32:

100 mils x 100 mils (2540μm x 2540μm)

ICL3241/43:

100 mils x 127 mils (2550μm x 3230μm)

METALLIZATION:

Type: Metal 1: AlSi(1%) Thickness: Metal 1: 8kÅ Type: Metal 2: AlSi (1%) Thickness: Metal 2: 10kÅ

SUBSTRATE POTENTIAL (POWERED UP):

GND

PASSIVATION:

Type: Silox Thickness: 13kÅ


TRANSISTOR COUNT:

ICL3221: 286 ICL3222: 338 ICL3223: 357 ICL3232: 296 ICL324X: 464

PROCESS:

Si Gate CMOS

Dual-In-Line Plastic Packages (PDIP)

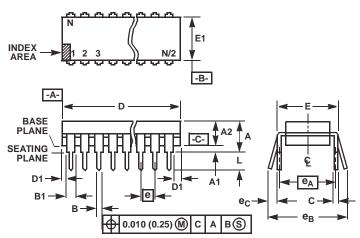


NOTES:

- Controlling Dimensions: INCH. In case of conflict between English and Metric dimensions, the inch dimensions control.
- 2. Dimensioning and tolerancing per ANSI Y14.5M-1982.
- Symbols are defined in the "MO Series Symbol List" in Section 2.2 of Publication No. 95.
- Dimensions A, A1 and L are measured with the package seated in JE-DEC seating plane gauge GS-3.
- D, D1, and E1 dimensions do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.010 inch (0.25mm).
- E and e_A are measured with the leads constrained to be perpendicular to datum -C-.
- 7. e_B and e_C are measured at the lead tips with the leads unconstrained. e_C must be zero or greater.
- 8. B1 maximum dimensions do not include dambar protrusions. Dambar protrusions shall not exceed 0.010 inch (0.25mm).
- 9. N is the maximum number of terminal positions.
- Corner leads (1, N, N/2 and N/2 + 1) for E8.3, E16.3, E18.3, E28.3,
 E42.6 will have a B1 dimension of 0.030 0.045 inch (0.76 1.14mm).

E16.3 (JEDEC MS-001-BB ISSUE D)
16 LEAD DUAL-IN-LINE PLASTIC PACKAGE

	INC	HES	MILLIM		
SYMBOL	MIN	MAX	MIN	MAX	NOTES
А	-	0.210	-	5.33	4
A1	0.015	-	0.39	-	4
A2	0.115	0.195	2.93	4.95	-
В	0.014	0.022	0.356	0.558	-
B1	0.045	0.070	1.15	1.77	8, 10
С	0.008	0.014	0.204	0.355	-
D	0.735	0.775	18.66	19.68	5
D1	0.005	-	0.13	-	5
Е	0.300	0.325	7.62	8.25	6
E1	0.240	0.280	6.10	7.11	5
е	0.100	BSC	2.54 BSC		-
e _A	0.300	BSC	7.62 BSC		6
e _B	-	0.430	-	10.92	7
L	0.115	0.150	2.93	3.81	4
N	1	6	1	6	9

Dual-In-Line Plastic Packages (PDIP)

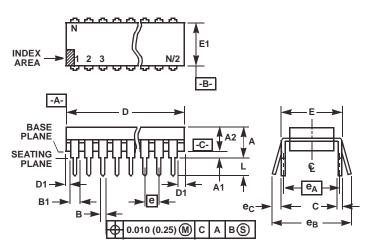


NOTES:

- Controlling Dimensions: INCH. In case of conflict between English and Metric dimensions, the inch dimensions control.
- 2. Dimensioning and tolerancing per ANSI Y14.5M-1982.
- 3. Symbols are defined in the "MO Series Symbol List" in Section 2.2 of Publication No. 95.
- 4. Dimensions A, A1 and L are measured with the package seated in JEDEC seating plane gauge GS-3.
- D, D1, and E1 dimensions do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.010 inch (0.25mm).
- E and eA are measured with the leads constrained to be perpendicular to datum -C-.
- 7. e_B and e_C are measured at the lead tips with the leads unconstrained. e_C must be zero or greater.
- B1 maximum dimensions do not include dambar protrusions. Dambar protrusions shall not exceed 0.010 inch (0.25mm).
- 9. N is the maximum number of terminal positions.
- Corner leads (1, N, N/2 and N/2 + 1) for E8.3, E16.3, E18.3, E28.3, E42.6 will have a B1 dimension of 0.030 - 0.045 inch (0.76 - 1.14mm).

E18.3 (JEDEC MS-001-BC ISSUE D)
18 LEAD DUAL-IN-LINE PLASTIC PACKAGE

	INC	HES	MILLIM	MILLIMETERS		
SYMBOL	MIN	MAX	MIN	MAX	NOTES	
А	-	0.210	-	5.33	4	
A1	0.015	-	0.39	-	4	
A2	0.115	0.195	2.93	4.95	-	
В	0.014	0.022	0.356	0.558	-	
B1	0.045	0.070	1.15	1.77	8, 10	
С	0.008	0.014	0.204	0.355	-	
D	0.845	0.880	21.47	22.35	5	
D1	0.005	-	0.13	-	5	
Е	0.300	0.325	7.62	8.25	6	
E1	0.240	0.280	6.10	7.11	5	
е	0.100	BSC	2.54 BSC		-	
e _A	0.300	BSC	7.62	BSC	6	
e _B	-	0.430	-	10.92	7	
L	0.115	0.150	2.93	3.81	4	
N	1	8	1	8	9	

Dual-In-Line Plastic Packages (PDIP)

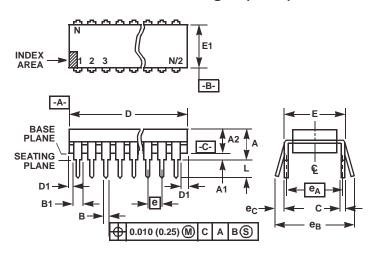


NOTES:

- 11. Controlling Dimensions: INCH. In case of conflict between English and Metric dimensions, the inch dimensions control.
- 12. Dimensioning and tolerancing per ANSI Y14.5M-1982.
- 13. Symbols are defined in the "MO Series Symbol List" in Section 2.2 of Publication No. 95.
- 14. Dimensions A, A1 and L are measured with the package seated in JEDEC seating plane gauge GS-3.
- D, D1, and E1 dimensions do not include mold flash or protrusions.
 Mold flash or protrusions shall not exceed 0.010 inch (0.25mm).
- 16. E and $\boxed{e_A}$ are measured with the leads constrained to be perpendicular to datum $\boxed{-C_-}$.
- 17. e_B and e_C are measured at the lead tips with the leads unconstrained. e_C must be zero or greater.
- 18. B1 maximum dimensions do not include dambar protrusions. Dambar protrusions shall not exceed 0.010 inch (0.25mm).
- 19. N is the maximum number of terminal positions.
- 20. Corner leads (1, N, N/2 and N/2 + 1) for E8.3, E16.3, E18.3, E28.3, E42.6 will have a B1 dimension of 0.030 0.045 inch (0.76 1.14mm).

E20.3 (JEDEC MS-001-AD ISSUE D)
20 LEAD DUAL-IN-LINE PLASTIC PACKAGE

	INCHES		MILLIMETERS		
SYMBOL	MIN	MAX	MIN	MAX	NOTES
А	-	0.210	-	5.33	4
A1	0.015	-	0.39	-	4
A2	0.115	0.195	2.93	4.95	-
В	0.014	0.022	0.356	0.558	-
B1	0.045	0.070	1.55	1.77	8
С	0.008	0.014	0.204	0.355	-
D	0.980	1.060	24.89	26.9	5
D1	0.005	-	0.13	-	5
Е	0.300	0.325	7.62	8.25	6
E1	0.240	0.280	6.10	7.11	5
е	0.100	BSC	2.54 BSC		-
e _A	0.300	BSC	7.62 BSC		6
e _B	-	0.430	-	10.92	7
L	0.115	0.150	2.93	3.81	4
N	2	0	2	0	9

Small Outline Plastic Packages (SOIC)

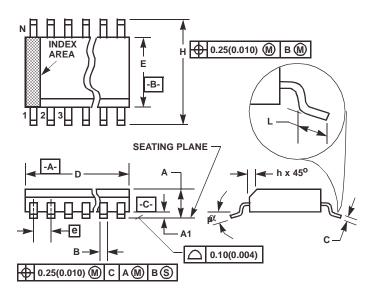


NOTES:

- 21. Symbols are defined in the "MO Series Symbol List" in Section 2.2 of Publication Number 95.
- 22. Dimensioning and tolerancing per ANSI Y14.5M-1982.
- Dimension "D" does not include mold flash, protrusions or gate burrs.
 Mold flash, protrusion and gate burrs shall not exceed 0.15mm (0.006 inch) per side.
- 24. Dimension "E" does not include interlead flash or protrusions. Interlead flash and protrusions shall not exceed 0.25mm (0.010 inch) per side.
- 25. The chamfer on the body is optional. If it is not present, a visual index feature must be located within the crosshatched area.
- 26. "L" is the length of terminal for soldering to a substrate.
- 27. "N" is the number of terminal positions.
- 28. Terminal numbers are shown for reference only.
- The lead width "B", as measured 0.36mm (0.014 inch) or greater above the seating plane, shall not exceed a maximum value of 0.61mm (0.024 inch).
- 30. Controlling dimension: MILLIMETER. Converted inch dimensions are not necessarily exact.

M16.15 (JEDEC MS-012-AC ISSUE C)
16 LEAD NARROW BODY SMALL OUTLINE PLASTIC PACKAGE

	INCHES		MILLIN		
SYMBOL	MIN	MAX	MIN	MAX	NOTES
А	0.0532	0.0688	1.35	1.75	-
A1	0.0040	0.0098	0.10	0.25	-
В	0.013	0.020	0.33	0.51	9
С	0.0075	0.0098	0.19	0.25	-
D	0.3859	0.3937	9.80	10.00	3
Е	0.1497	0.1574	3.80	4.00	4
е	0.050	BSC	1.27 BSC		-
Н	0.2284	0.2440	5.80	6.20	-
h	0.0099	0.0196	0.25	0.50	5
L	0.016	0.050	0.40	1.27	6
N	16		16		7
α	0°	8 ⁰	0°	8°	-

Thin Shrink Small Outline Plastic Packages (TSSOP)

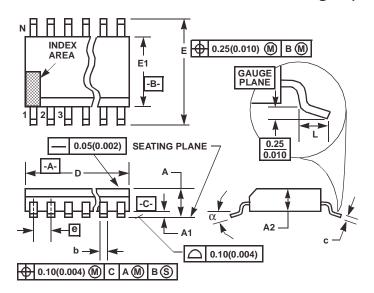

NOTES:


- These package dimensions are within allowable dimensions of JEDEC MO-153-AB, Issue E.
- 32. Dimensioning and tolerancing per ANSI Y14.5M-1982.
- 33. Dimension "D" does not include mold flash, protrusions or gate burrs. Mold flash, protrusion and gate burrs shall not exceed 0.15mm (0.006 inch) per side.
- Dimension "E1" does not include interlead flash or protrusions. Interlead flash and protrusions shall not exceed 0.15mm (0.006 inch) per side.
- 35. The chamfer on the body is optional. If it is not present, a visual index feature must be located within the crosshatched area.
- 36. "L" is the length of terminal for soldering to a substrate.
- 37. "N" is the number of terminal positions.
- 38. Terminal numbers are shown for reference only.
- 39. Dimension "b" does not include dambar protrusion. Allowable dambar protrusion shall be 0.08mm (0.003 inch) total in excess of "b" dimension at maximum material condition. Minimum space between protrusion and adjacent lead is 0.07mm (0.0027 inch).
- 40. Controlling dimension: MILLIMETER. Converted inch dimensions are not necessarily exact. (Angles in degrees)

M16.173
16 LEAD THIN SHRINK SMALL OUTLINE PLASTIC PACKAGE

	INCHES		MILLIMETERS		
SYMBOL	MIN	MAX	MIN	MAX	NOTES
А	-	0.047	-	1.20	-
A1	0.002	0.006	0.05	0.15	-
A2	0.031	0.051	0.80	1.05	-
b	0.0075	0.0118	0.19	0.30	9
С	0.0035	0.0079	0.09	0.20	-
D	0.193	0.201	4.90	5.10	3
E1	0.169	0.177	4.30	4.50	4
е	0.026	BSC	0.65 BSC		-
Е	0.246	0.256	6.25	6.50	-
L	0.0177	0.0295	0.45	0.75	6
N	16		1	6	7
α	0°	8 ⁰	0°	80	-

Rev. 0 6/98

Small Outline Plastic Packages (SSOP)

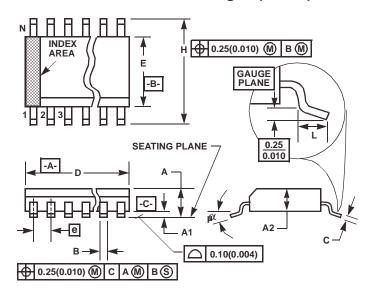

NOTES:


- Symbols are defined in the "MO Series Symbol List" in Section 2.2 of Publication Number 95.
- 2. Dimensioning and tolerancing per ANSI Y14.5M-1982.
- Dimension "D" does not include mold flash, protrusions or gate burrs.
 Mold flash, protrusion and gate burrs shall not exceed 0.20mm (0.0078 inch) per side.
- 4. Dimension "E" does not include interlead flash or protrusions. Interlead flash and protrusions shall not exceed 0.20mm (0.0078 inch) per side.
- The chamfer on the body is optional. If it is not present, a visual index feature must be located within the crosshatched area.
- 6. "L" is the length of terminal for soldering to a substrate.
- 7. "N" is the number of terminal positions.
- 8. Terminal numbers are shown for reference only.
- Dimension "B" does not include dambar protrusion. Allowable dambar protrusion shall be 0.13mm (0.005 inch) total in excess of "B" dimension at maximum material condition.
- 10. Controlling dimension: MILLIMETER. Converted inch dimensions are not necessarily exact.

M16.209 (JEDEC MO-150-AC ISSUE B)
16 LEAD SHRINK SMALL OUTLINE PLASTIC PACKAGE

	INC	HES	MILLIMETERS			
SYMBOL	MIN	MAX	MIN	MAX	NOTES	
А	-	0.078	-	2.00	-	
A1	0.002	-	0.05	-	-	
A2	0.065	0.072	1.65	1.85	-	
В	0.009	0.014	0.22	0.38	9	
С	0.004	0.009	0.09	0.25	-	
D	0.233	0.255	5.90	6.50	3	
Е	0.197	0.220	5.00	5.60	4	
е	0.026	BSC	0.65 BSC		-	
Н	0.292	0.322	7.40	8.20	-	
L	0.022	0.037	0.55	0.95	6	
N	16		16		7	
α	0°	8 ⁰	0 ₀	8º	-	

Rev. 2 3/95

Small Outline Plastic Packages (SOIC)

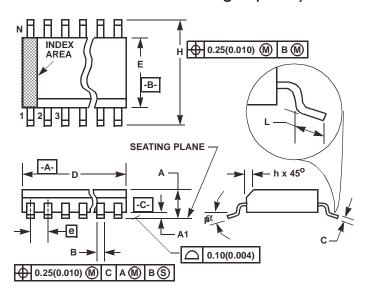


NOTES:

- Symbols are defined in the "MO Series Symbol List" in Section 2.2 of Publication Number 95.
- 12. Dimensioning and tolerancing per ANSI Y14.5M-1982.
- Dimension "D" does not include mold flash, protrusions or gate burrs.
 Mold flash, protrusion and gate burrs shall not exceed 0.15mm (0.006 inch) per side.
- 14. Dimension "E" does not include interlead flash or protrusions. Interlead flash and protrusions shall not exceed 0.25mm (0.010 inch) per side.
- 15. The chamfer on the body is optional. If it is not present, a visual index feature must be located within the crosshatched area.
- 16. "L" is the length of terminal for soldering to a substrate.
- 17. "N" is the number of terminal positions.
- 18. Terminal numbers are shown for reference only.
- The lead width "B", as measured 0.36mm (0.014 inch) or greater above the seating plane, shall not exceed a maximum value of 0.61mm (0.024 inch)
- Controlling dimension: MILLIMETER. Converted inch dimensions are not necessarily exact.

M16.3 (JEDEC MS-013-AA ISSUE C)
16 LEAD WIDE BODY SMALL OUTLINE PLASTIC PACKAGE

	INC	HES	MILLIMETERS			
SYMBOL	MIN	MAX	MIN	MAX	NOTES	
А	0.0926	0.1043	2.35	2.65	-	
A1	0.0040	0.0118	0.10	0.30	-	
В	0.013	0.0200	0.33	0.51	9	
С	0.0091	0.0125	0.23	0.32	-	
D	0.3977	0.4133	10.10	10.50	3	
Е	0.2914	0.2992	7.40	7.60	4	
е	0.050	BSC	1.27 BSC		-	
Н	0.394	0.419	10.00	10.65	-	
h	0.010	0.029	0.25	0.75	5	
L	0.016	0.050	0.40	1.27	6	
N	16		16		7	
α	0°	8º	0 ₀	8º	-	

Small Outline Plastic Packages (SOIC)

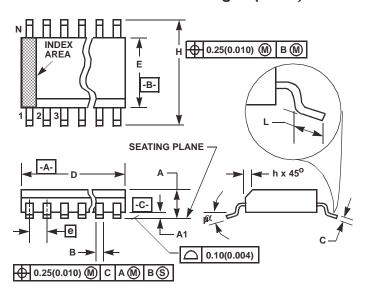


NOTES:

- Symbols are defined in the "MO Series Symbol List" in Section 2.2 of Publication Number 95.
- 22. Dimensioning and tolerancing per ANSI Y14.5M-1982.
- 23. Dimension "D" does not include mold flash, protrusions or gate burrs. Mold flash, protrusion and gate burrs shall not exceed 0.15mm (0.006 inch) per side.
- Dimension "E" does not include interlead flash or protrusions. Interlead flash and protrusions shall not exceed 0.25mm (0.010 inch) per side.
- 25. The chamfer on the body is optional. If it is not present, a visual index feature must be located within the crosshatched area.
- 26. "L" is the length of terminal for soldering to a substrate.
- 27. "N" is the number of terminal positions.
- 28. Terminal numbers are shown for reference only.
- 29. The lead width "B", as measured 0.36mm (0.014 inch) or greater above the seating plane, shall not exceed a maximum value of 0.61mm (0.024 inch)
- Controlling dimension: MILLIMETER. Converted inch dimensions are not necessarily exact.

M18.3 (JEDEC MS-013-AB ISSUE C)
18 LEAD WIDE BODY SMALL OUTLINE PLASTIC PACKAGE

	INCHES		MILLIMETERS		
SYMBOL	MIN	MAX	MIN	MAX	NOTES
А	0.0926	0.1043	2.35	2.65	-
A1	0.0040	0.0118	0.10	0.30	-
В	0.013	0.0200	0.33	0.51	9
С	0.0091	0.0125	0.23	0.32	-
D	0.4469	0.4625	11.35	11.75	3
Е	0.2914	0.2992	7.40	7.60	4
е	0.050	BSC	1.27 BSC		-
Н	0.394	0.419	10.00	10.65	-
h	0.010	0.029	0.25	0.75	5
L	0.016	0.050	0.40	1.27	6
N	18		18		7
α	0°	8 ⁰	00	80	-

Thin Shrink Small Outline Plastic Packages (TSSOP)

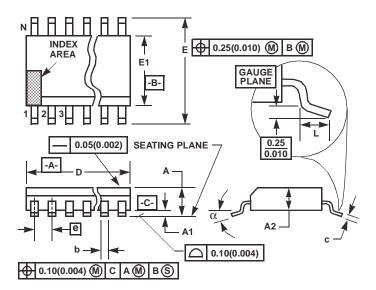

NOTES:


- These package dimensions are within allowable dimensions of JEDEC MO-153-AC, Issue E.
- 32. Dimensioning and tolerancing per ANSI Y14.5M-1982.
- 33. Dimension "D" does not include mold flash, protrusions or gate burrs. Mold flash, protrusion and gate burrs shall not exceed 0.15mm (0.006 inch) per side.
- Dimension "E1" does not include interlead flash or protrusions. Interlead flash and protrusions shall not exceed 0.15mm (0.006 inch) per side.
- 35. The chamfer on the body is optional. If it is not present, a visual index feature must be located within the crosshatched area.
- 36. "L" is the length of terminal for soldering to a substrate.
- 37. "N" is the number of terminal positions.
- 38. Terminal numbers are shown for reference only.
- 39. Dimension "b" does not include dambar protrusion. Allowable dambar protrusion shall be 0.08mm (0.003 inch) total in excess of "b" dimension at maximum material condition. Minimum space between protrusion and adjacent lead is 0.07mm (0.0027 inch).
- 40. Controlling dimension: MILLIMETER. Converted inch dimensions are not necessarily exact. (Angles in degrees)

M20.173
20 LEAD THIN SHRINK SMALL OUTLINE PLASTIC PACKAGE

	INCHES		MILLIMETERS		
SYMBOL	MIN	MAX	MIN	MAX	NOTES
А	-	0.047	-	1.20	-
A1	0.002	0.006	0.05	0.15	-
A2	0.031	0.051	0.80	1.05	-
b	0.0075	0.0118	0.19	0.30	9
С	0.0035	0.0079	0.09	0.20	-
D	0.252	0.260	6.40	6.60	3
E1	0.169	0.177	4.30	4.50	4
е	0.026	BSC	0.65 BSC		-
Е	0.246	0.256	6.25	6.50	-
L	0.0177	0.0295	0.45	0.75	6
N	20		2	0	7
α	0°	8º	0°	8º	-

Rev. 1 6/98

Shrink Small Outline Plastic Packages (SSOP)

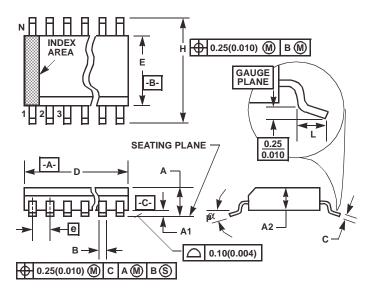

NOTES:


- Symbols are defined in the "MO Series Symbol List" in Section 2.2 of Publication Number 95.
- 42. Dimensioning and tolerancing per ANSI Y14.5M-1982.
- 43. Dimension "D" does not include mold flash, protrusions or gate burrs. Mold flash, protrusion and gate burrs shall not exceed 0.20mm (0.0078 inch) per side.
- 44. Dimension "E" does not include interlead flash or protrusions. Interlead flash and protrusions shall not exceed 0.20mm (0.0078 inch) per side.
- 45. The chamfer on the body is optional. If it is not present, a visual index feature must be located within the crosshatched area.
- 46. "L" is the length of terminal for soldering to a substrate.
- 47. "N" is the number of terminal positions.
- 48. Terminal numbers are shown for reference only.
- 49. Dimension "B" does not include dambar protrusion. Allowable dambar protrusion shall be 0.13mm (0.005 inch) total in excess of "B" dimension at maximum material condition.
- Controlling dimension: MILLIMETER. Converted inch dimensions are not necessarily exact.

M20.209 (JEDEC MO-150-AE ISSUE B)
20 LEAD SHRINK SMALL OUTLINE PLASTIC PACKAGE

	INCHES		MILLIM		
SYMBOL	MIN	MAX	MIN	MAX	NOTES
А	-	0.078	-	2.00	-
A1	0.002	-	0.05	-	-
A2	0.065	0.072	1.65	1.85	-
В	0.009	0.014	0.22	0.38	9
С	0.004	0.009	0.09	0.25	-
D	0.272	0.295	6.90	7.50	3
Е	0.197	0.220	5.00	5.60	4
е	0.026	BSC	0.65 BSC		-
Н	0.292	0.322	7.40	8.20	-
L	0.022	0.037	0.55	0.95	6
N	20		20		7
α	0°	8 ⁰	0°	8º	-

Rev. 2 4/95

Thin Shrink Small Outline Plastic Packages (TSSOP)

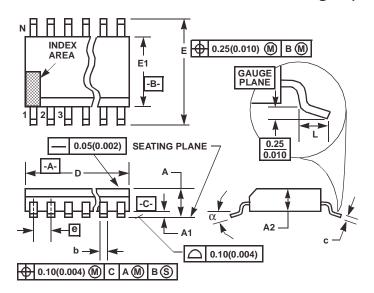

NOTES:


- These package dimensions are within allowable dimensions of JEDEC MO-153-AE, Issue E.
- 52. Dimensioning and tolerancing per ANSI Y14.5M-1982.
- 53. Dimension "D" does not include mold flash, protrusions or gate burrs. Mold flash, protrusion and gate burrs shall not exceed 0.15mm (0.006 inch) per side.
- Dimension "E1" does not include interlead flash or protrusions. Interlead flash and protrusions shall not exceed 0.15mm (0.006 inch) per side.
- 55. The chamfer on the body is optional. If it is not present, a visual index feature must be located within the crosshatched area.
- 56. "L" is the length of terminal for soldering to a substrate.
- 57. "N" is the number of terminal positions.
- 58. Terminal numbers are shown for reference only.
- 59. Dimension "b" does not include dambar protrusion. Allowable dambar protrusion shall be 0.08mm (0.003 inch) total in excess of "b" dimension at maximum material condition. Minimum space between protrusion and adjacent lead is 0.07mm (0.0027 inch).
- 60. Controlling dimension: MILLIMETER. Converted inch dimensions are not necessarily exact. (Angles in degrees)

M28.173 28 LEAD THIN SHRINK SMALL OUTLINE PLASTIC PACKAGE

	INCHES		MILLIM	MILLIMETERS	
SYMBOL	MIN	MAX	MIN	MAX	NOTES
А	-	0.047	-	1.20	-
A1	0.002	0.006	0.05	0.15	-
A2	0.031	0.051	0.80	1.05	-
b	0.0075	0.0118	0.19	0.30	9
С	0.0035	0.0079	0.09	0.20	-
D	0.378	0.386	9.60	9.80	3
E1	0.169	0.177	4.30	4.50	4
е	0.026	BSC	0.65 BSC		-
Е	0.246	0.256	6.25	6.50	-
L	0.0177	0.0295	0.45	0.75	6
N	28		2	8	7
α	0°	8º	0°	8º	-

Rev. 0 6/98

Shrink Small Outline Plastic Packages (SSOP)

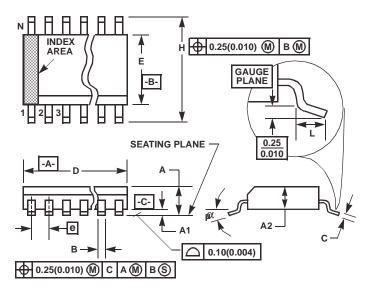

NOTES:


- 61. Symbols are defined in the "MO Series Symbol List" in Section 2.2 of Publication Number 95.
- 62. Dimensioning and tolerancing per ANSI Y14.5M-1982.
- 63. Dimension "D" does not include mold flash, protrusions or gate burrs. Mold flash, protrusion and gate burrs shall not exceed 0.20mm (0.0078 inch) per side.
- 64. Dimension "E" does not include interlead flash or protrusions. Interlead flash and protrusions shall not exceed 0.20mm (0.0078 inch) per side.
- 65. The chamfer on the body is optional. If it is not present, a visual index feature must be located within the crosshatched area.
- 66. "L" is the length of terminal for soldering to a substrate.
- 67. "N" is the number of terminal positions.
- 68. Terminal numbers are shown for reference only.
- 69. Dimension "B" does not include dambar protrusion. Allowable dambar protrusion shall be 0.13mm (0.005 inch) total in excess of "B" dimension at maximum material condition.
- Controlling dimension: MILLIMETER. Converted inch dimensions are not necessarily exact.

M28.209 (JEDEC MO-150-AH ISSUE B)
28 LEAD SHRINK SMALL OUTLINE PLASTIC PACKAGE

	INCHES		MILLIM	IETERS	
SYMBOL	MIN	MAX	MIN	MAX	NOTES
А	-	0.078	-	2.00	-
A1	0.002	-	0.05	-	-
A2	0.065	0.072	1.65	1.85	-
В	0.009	0.014	0.22	0.38	9
С	0.004	0.009	0.09	0.25	-
D	0.390	0.413	9.90	10.50	3
Е	0.197	0.220	5.00	5.60	4
е	0.026	BSC	0.65 BSC		-
Н	0.292	0.322	7.40	8.20	-
L	0.022	0.037	0.55	0.95	6
N	28		28		7
α	0°	8 ⁰	00	80	-

Rev. 1 3/95

Small Outline Plastic Packages (SOIC)

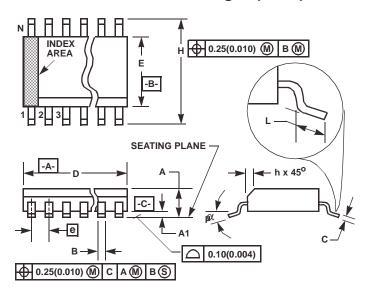

NOTES:

- 71. Symbols are defined in the "MO Series Symbol List" in Section 2.2 of Publication Number 95.
- 72. Dimensioning and tolerancing per ANSI Y14.5M-1982.
- 73. Dimension "D" does not include mold flash, protrusions or gate burrs. Mold flash, protrusion and gate burrs shall not exceed 0.15mm (0.006 inch) per side.
- 74. Dimension "E" does not include interlead flash or protrusions. Interlead flash and protrusions shall not exceed 0.25mm (0.010
- 75. The chamfer on the body is optional. If it is not present, a visual index feature must be located within the crosshatched area.
- 76. "L" is the length of terminal for soldering to a substrate.
- 77. "N" is the number of terminal positions.
- 78. Terminal numbers are shown for reference only.
- 79. The lead width "B", as measured 0.36mm (0.014 inch) or greater above the seating plane, shall not exceed a maximum value of 0.61mm (0.024 inch)
- 80. Controlling dimension: MILLIMETER. Converted inch dimensions are not necessarily exact.

M28.3 (JEDEC MS-013-AE ISSUE C) 28 LEAD WIDE BODY SMALL OUTLINE PLASTIC PACKAGE

	INCHES		MILLIMETERS		
SYMBOL	MIN	MAX	MIN	MAX	NOTES
А	0.0926	0.1043	2.35	2.65	-
A1	0.0040	0.0118	0.10	0.30	-
В	0.013	0.0200	0.33	0.51	9
С	0.0091	0.0125	0.23	0.32	-
D	0.6969	0.7125	17.70	18.10	3
Е	0.2914	0.2992	7.40	7.60	4
е	0.05	BSC	1.27 BSC		-
Н	0.394	0.419	10.00	10.65	-
h	0.01	0.029	0.25	0.75	5
L	0.016	0.050	0.40	1.27	6
N	28		28		7
α	0 ₀	8 ⁰	00	8º	-

Rev. 0 12/93

All Intersil products are manufactured, assembled and tested utilizing ISO9000 quality systems. Intersil Corporation's quality certifications can be viewed at www.intersil.com/design/quality

Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.

For information regarding Intersil Corporation and its products, see www.intersil.com

Sales Office Headquarters

NORTH AMERICA

Intersil Corporation 7585 Irvine Center Drive Suite 100 Irvine, CA 92618

2401 Palm Bay Rd. Palm Bay, FL 32905 TEL: (321) 724-7000 TEL: (949) 341-7000 FAX: (321) 724-7946 FAX: (949) 341-7123

EUROPE

Intersil Europe Sarl Ave. C - F Ramuz 43 CH-1009 Pully Switzerland

TEL: +41 21 7293637 FAX: +41 21 7293684

Intersil Corporation Unit 1804 18/F Guangdong Water Building 83 Austin Road TST, Kowloon Hong Kong

TEL: +852 2723 6339 FAX: +852 2730 1433

Intersil Corporation