

SPECIFICATION SHEET

JFW MODEL 50T-142

TERMINATION

JFW Industries, Inc.
Phone: 317-887-1340
sales@jfwindustries.com
www.jfwindustries.com

Frequency Range DC-8000 MHz


Impedance 50 Ohms nominal

VSWR 1.1:1 maximum DC-1000 MHz
1.2:1 maximum 1000-4000 MHz
1.35:1 maximum 4000-8000 MHz

RF Input Power 2 Watts average

RF Connector N male

Physical Size See outline drawing
092-1832 (with beadchain)
092-2003 (without beadchain)

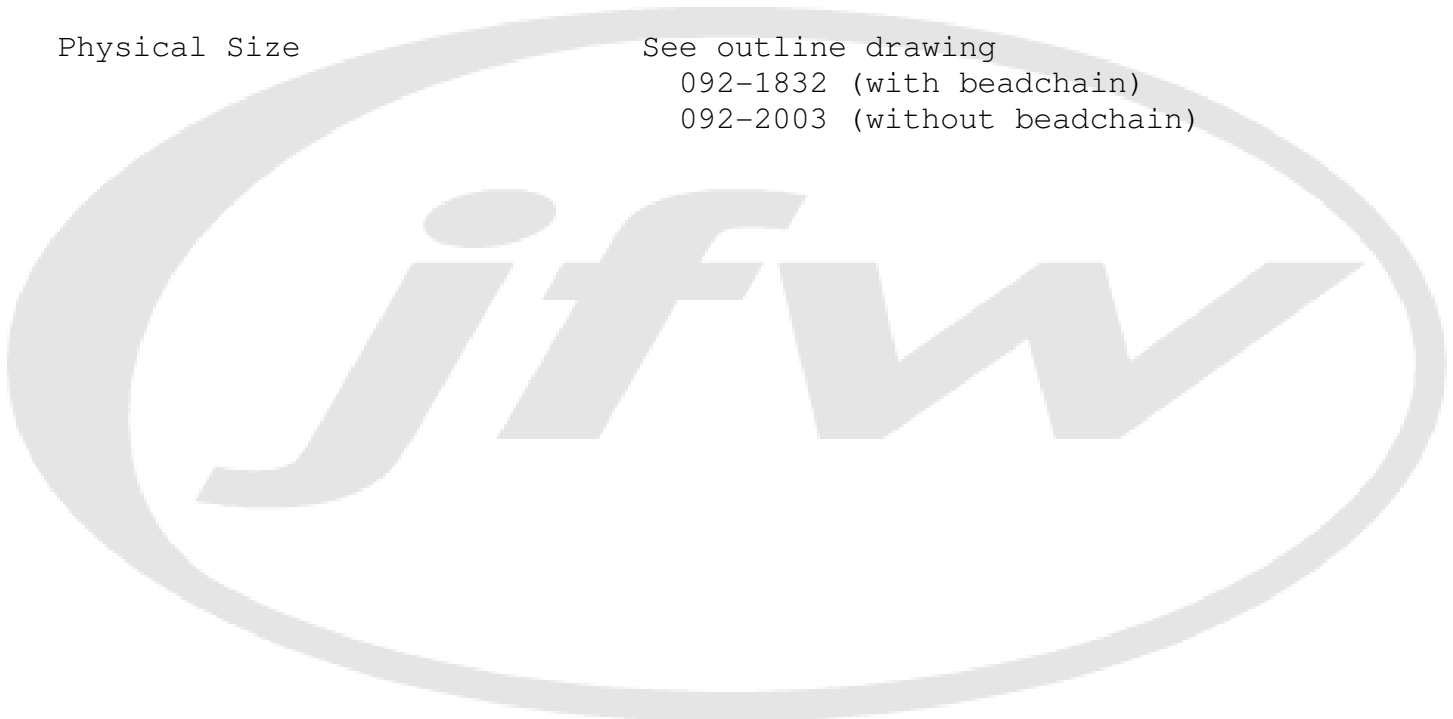

ECR/ECN #	DATE	REV	APPR / DATE	ECR/ECN #	DATE	REV	APPR / DATE
1079	05/19/1998	A					
2894	02/18/2002	B					
9999	02/14/2003	C	SL 04/30/2003				