### Features/Benefits

- Positive detent
- Multi-pole and multi-position
- Snap-together assembly
- Power switching



#### Models Availabl

## **Specifications**

CONTACT RATING: Q contact material: 12 AMPS @ 125 V AC; 6 AMPS @ 250 V AC; 1 AMP @ 125 V DC (UL/CSA). See page M-42 for additional ratings.

ELECTRICAL LIFE: 10,000 make-and-break cycles at full load. CONTACT RESISTANCE: Below 10 m  $\Omega$  typ. initial @ 2-4 V DC,

100 mA, for both silver and gold plated contacts.

INSULATION RESISTANCE:  $10^9 \Omega$  min.

DIELECTRIC STRENGTH: 1,000 Vrms min. @ sea level.

OPERATING TEMPERATURE: -30°C to 85°C.

INDEXING: 45° or 90°, 2-4 Positions.

NOTE: Any models supplied with Q or B contact material are RoHS compliant.

**NOTE:** Specifications and materials listed above are for switchlocks with standard options. For information on specific and custom switchlocks, consult Customer Service Center.

**Typical Applications** 

Machine controls





### Materials

LOCK: Zinc alloy with stainless steel facing (4 tumbler locks and 6 tumbler tubular lock).

KEYS: Two nickel plated brass keys with code number (4 tumbler). Two die cast chrome plated zinc alloy keys (6 tumbler).

SWITCH HOUSING: 6/6 nylon (UL 94V-2).

CONTACTS & TERMINALS: Q contact material: Copper, silver plated. See page L-42 for additional contact materials.

CONTACT SPRING: Music wire or stainless steel.

MOUNTING NUT: Zinc alloy.


MOUNTING CLIP: Steel, zinc plated.

DRESS NUT: Brass, nickel plated.

TERMINAL SEAL: Epoxy.

### **Build-A-Switch**

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages L–40 through L–42. For additional options not shown in catalog, consult Customer Service Center.

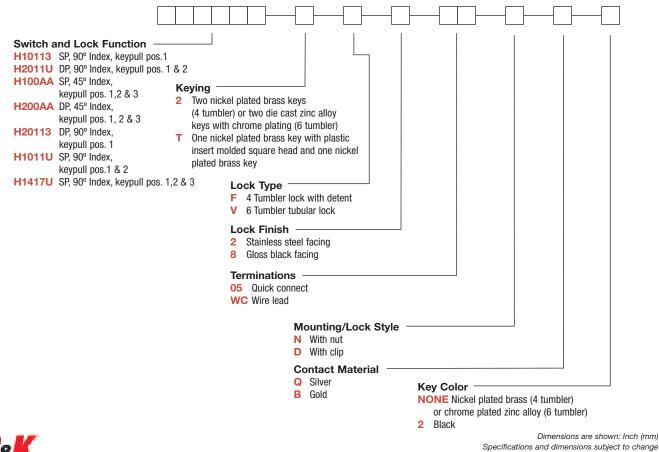



# **SWITCH AND LOCK FUNCTION**

-0-0-0-00-0-0-0

			CONNECTED TERMINALS						
NO. TUMBLERS	NO. POLES	MODEL NO.	POS. 1	POS. 2	POS. 3	POS. 4	KEY PULL POSITIONS	LOCK CONFIGURATION	INDEXING
4	SP DP	H100AA H200AA	7-8 7-8, 3-4	8-1 8-1, 4-5	6-7 6-7, 2-3		Positions 1, 2 & 3	3 0 2 3 0 2	45°
4 & 6	SP DP	H10113 H20113	7-8 7-8, 3-4	8-2 8-2, 4-6			Position 1	P05.1	
4 & 6	SP DP	H1011U H2011U	7-8 7-8, 3-4	8-2 8-2, 4-6			Positions 1 & 2	P05.1	90°
4	SP	H1417U	6-8	8-2	5-6		Positions 1, 2 & 3	P05.1 © 3 © © 2	

All models . All with all options when ordered with 'G' or 'Q' contact material.

#### LEGEND


- = Detent Positions (45° or 90°)
- Exercise possible in these positions.
- = Stop Positions ۲



TERMINAL NUMBERS



Terminal numbers molded on housing.

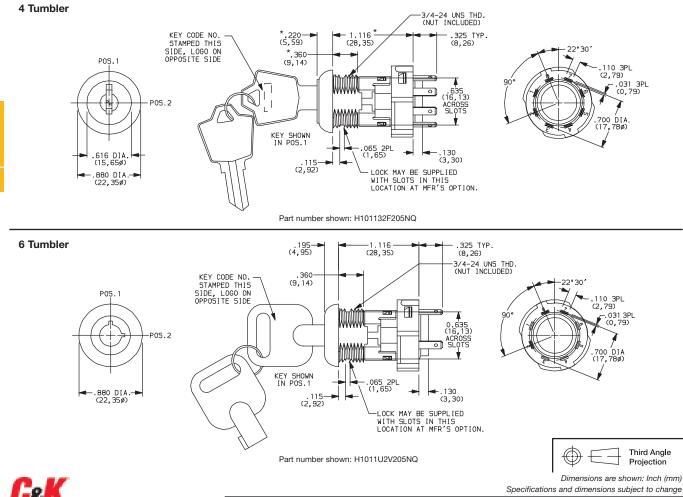



Switchlock T

www.ck-components.com


# KEYING


OPTION CODE	KEY OPTIONS	CODE NO. ON KEY	CODE NO. ON LOCK
2	2 NICKEL PLATED BRASS KEYS (4 TUMBLER) OR 2 CHROME PLATED ZINC ALLOY KEYS (6 TUMBLER)	YES	NO
т	1 NICKEL PLATED BRASS KEY WITH PLASTIC INSERT MOLDED SQUARE HEAD & 1 NICKEL PLATED BRASS KEY	YES	NO

	TION DE	KEY COLOR	
NC	DNE	NICKEL PLATED BRASS (4 TUMBLER) OR CHROME PLATED ZINC ALLOY (6 TUMBLER)	
:	2	BLACK	

NOTE: All orders keyed alike, standard. For more than one key code, replacement keys, or other special features, consult Customer Service Center


#### NICKEL PLATED BRASS KEY





Key part number: 115140126 NOTE: Key head shape subject to change without notice. NICKEL PLATED BRASS KEY WITH PLASTIC INSERT MOLDED SQUARE HEAD


#### CHROME PLATED ZINC ALLOY KEY




Key part number: 363C1AAAA


#### LOCK TYPE

F 4 TUMBLER LOCK WITH ADDED DETENT




#### ν 6 TUMBLER TUBULAR LOCK




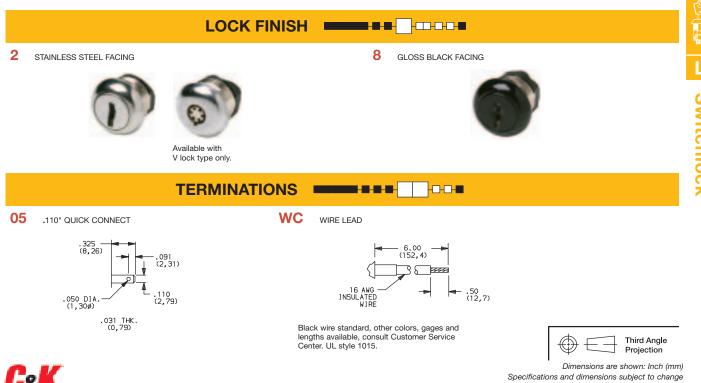



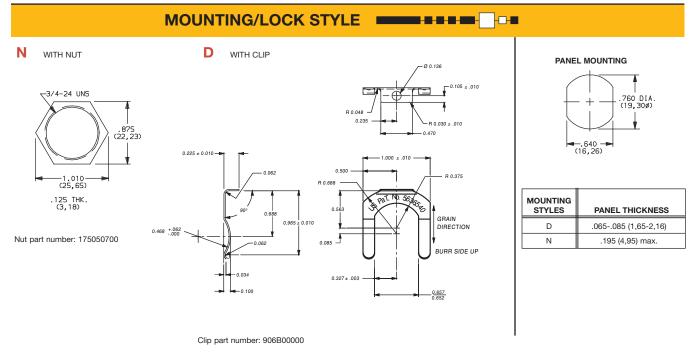

### Switch and Lock Assembly Instructions



## 1. Place lock assembly in mounting hole on panel,

- secure with mounting nut.
- Align keying tab on switch assembly with keying slot on lock assembly.
- 3. Snap assemblies together.
- 4. Switch installation is permanent. Switch cannot be removed from lock after assembly. Attempting to separate switch and lock may cause damage to switchlock.


#### LOCK ASSEMBLY

## CONTACT MATERIAL

OPTION CODE	RoHS COMPLIANT*	RoHS COMPATIBLE*	CONTACT AND TERMINAL MATERIAL	RATING	
Q	YES	YES	SILVER <sup>2</sup>	POWER	12 AMPS @ 125 V AC; 6 AMPS @ 250 V AC; 1 AMP @ 125 V DC (UL/CSA).
В	YES	YES	GOLD <sup>1</sup>	LOW LEVEL/DRY CIRCUIT	0.4 VA MAX. @ 20 V AC or DC MAX.

<sup>1</sup> CONTACTS & TERMINALS: Copper, with gold plate over nickel plate. <sup>2</sup> CONTACTS & TERMINALS: Copper, silver plated.  $^{\ast}$  Note: See Technical Data section of this catalog for RoHS compliant and compatible definition and specifications.

All models  ${}_{\otimes}$   ${}^{\otimes}$  with all options when ordered with 'Q' contact material.





www.ck-components.com

# **AVAILABLE HARDWARE**



Key Code: A126 4 TUMBLER PART NO. (ONE KEY)

115140126

Material: Brass Finish: Nickel plate



Key Code: AAAA PART NO. (ONE KEY) 363C1AAAA


Material: Zinc Alloy Finish: Chrome plate



Key Code: A126 4 TUMBLER PART NO. (ONE KEY)

1159112602 BLACK

Material: Brass Finish: Nickel plate 6/6 Nylon insert molded head



Dimensions are shown: Inch (mm) Specifications and dimensions subject to change

