



Phototransistor Output; GaAs Input (No base connection)												
Part Number	CTR @		BV _{CEO}	BV _{ECO}	t _{ON} /t _{OFF}	V _{ISO} AC[RMS]	Pkg		Agency Approvals			
	10mA	I _F (%)	(V)	(V)	(μs)		Outline		Standard	QT	MOT	
	min	max	min	min	max		QT	MOT		QT	MOT	
CNW82	40	-	50	7	-	5.9kV	A	N/A	A,B,D,F,N,S,U	.300	N/A	
CNW84	63	320	80	7	-	5.9kV	A	N/A	A,B,D,F,N,S,U	.300	N/A	
CNX82A	40	250	50	7	-	3.75kV	I	N/A	A,B,D,F,N,S,U	.300	N/A	
CNY17F-1	40	80	70	7	10/10	5.3kV	K	N/A	A,B,D,F,N,S,T,U	.300	N/A	
CNY17F-2	63	125	70	7	10/10	5.3kV	K	N/A	A,B,D,F,N,S,T,U	.300	N/A	
CNY17F-3	100	200	70	7	10/10	5.3kV	K	N/A	A,B,D,F,N,S,T,U	.300	N/A	
CNY17F-4	160	320	70	7	10/10	5.3kV	K	N/A	A,B,D,F,N,S,T,U	.300	N/A	
CNY17GF-1	40	80	70	7	10/10	3.75kV	I	N/A	A,B,D,F,N,S,U	.300	N/A	
CNY17GF-2	63	125	70	7	10/10	3.75kV	I	N/A	A,B,D,F,N,S,U	.300	N/A	
CNY17GF-3	100	200	70	7	10/10	3.75kV	I	N/A	A,B,D,F,N,S,U	.300	N/A	
CNY17GF-4	160	320	70	7	10/10	3.75kV	I	N/A	A,B,D,F,N,S,U	.300	N/A	
MOC8101	50	80	30	7	20/20	5.3kV	K	N/A	A,B,D,F,N,S,T,U	.300	N/A	
MOC8102	73	117	30	7	20/20	5.3kV	K	N/A	A,B,D,F,N,S,T,U	.300	N/A	
MOC8103	108	173	30	7	20/20	5.3kV	K	N/A	A,B,D,F,N,S,T,U	.300	N/A	
MOC8104	160	256	30	7	20/20	5.3kV	K	N/A	A,B,D,F,N,S,T,U	.300	N/A	
MOC8105	65	133	30	7	20/20	5.3kV	K	N/A	A,B,D,F,N,S,T,U	.300	N/A	
MOC8106	50	150	70	-	-	5.3kV	K	N/A	A,B,D,F,N,S,T,U	.300	N/A	
MOC8107	100	300	70	-	-	5.3kV	K	N/A	A,B,D,F,N,S,T,U	.300	N/A	
MOC8108	250	600	70	-	-	5.3kV	K	N/A	A,B,D,F,N,S,T,U	.300	N/A	
MOC8111	20	-	30	7	20/20	5.3kV	K	J	A,B,D,F,N,S,T,U	.300	V	
MOC8112	50	-	30	7	20/20	5.3kV	K	J	A,B,D,F,N,S,T,U	.300	V	
MOC8113	100	-	30	7	20/20	5.3kV	K	J	A,B,D,F,N,S,T,U	.300	V	
SL5582	40	320	50	7	20/50	3.75kV	I	N/A	A,B,D,F,N,S,U	.300	N/A	
SL5582W	40	320	50	7	20/50	5.9kV	A	N/A	A,B,D,F,N,S,U	.300	N/A	

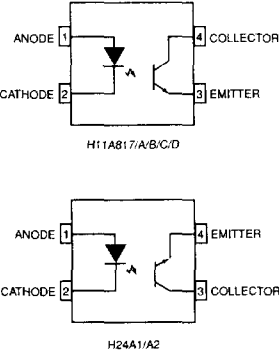

Phototransistor Output; GaAs Input (No base connection) (4-Pin)												
Part Number	CTR @		BV _{CEO}	BV _{ECO}	t _{ON} /t _{OFF}	V _{ISO} AC[RMS]	Pkg		Agency Approvals			
	≤10mA	I _F (%)	(V)	(V)	(μs)		Outline		Standard	QT	MOT	
	min	max	min	min	max		QT	MOT		QT	MOT	
H11A817	50	600	35	6	18/18	5.3kV	G	N/A	A,B,D,F,N,S,U	.300	N/A	
H11A817A	80	160	35	6	18/18	5.3kV	G	N/A	A,B,D,F,N,S,U	.300	N/A	
H11A817B	130	260	35	6	18/18	5.3kV	G	N/A	A,B,D,F,N,S,U	.300	N/A	
H11A817C	200	400	35	6	18/18	5.3kV	G	N/A	A,B,D,F,N,S,U	.300	N/A	
H11A817D	300	600	35	6	18/18	5.3kV	G	N/A	A,B,D,F,N,S,U	.300	N/A	
H24A1	100	-	30	7	-	5.3kV	F	N/A	A,B,D,F,N,S,U	.300	N/A	
H24A2	20	-	30	7	-	5.3kV	F	N/A	A,B,D,F,N,S,U	.300	N/A	


Notes:

Optocoupler package drawings appear on pages 23, 24 and 25