## LOW CAPACITANCE TVS ARRAY



# DESCRIPTION

The ESOT3.3LC-2, a high frequency, transient suppression protector of wireless telecommunications applications for portable devices. This device is packaged in a SOT-23 plastic case and is available in a 3.3 volt, bidirectional configuration.

Due to its low capacitance, the ESOT3.3LC-2 is ideal protection of Ethernet or USB port interfaces against the effects of electrostatic discharge (ESD) and electrical fast transients (EFT). This device meets the requirements of IEC 61000-4-2 and IEC 61000-4-4.

## **FEATURES**

- Compatible with IEC 61000-4-2 (ESD): Air 15kV, Contact 8kV
- Compatible with IEC 61000-4-4 (EFT): 40A, 5/50ns
- 175 Watts Peak Pulse Power per Line(tp = 8/20µs)
- Protects Two Bidirectional Lines
- Bidirectional Configuration
- Low Leakage Current < 2.0μA
- Low Capacitance > 15pF per Line
- RoHS Compliant
- REACH Compliant


# **MECHANICAL CHARACTERISTICS**

- Molded JEDEC SOT-23 Package
- Approximate Weight: 8 milligrams
- Lead-Free Pure-Tin Plating (Annealed)
- Solder Reflow Temperature:
  - Pure-Tin Sn, 100: 260-270°C
- Flammability Rating UL 94V-0
- 8mm Tape and Reel per EIA Standard 481

# **APPLICATIONS**

- Ethernet 10/100/1000 Base T
- USB Ports
- Cellular Phones
- Audio/Video Inputs
- SMART Phones
- E1/T1 & E3/T3

# **PIN CONFIGURATION**



## TYPICAL DEVICE CHARACTERISTICS


05183


MAXIMUM RATINGS @ 25°C Unless Otherwise Specified								
PARAMETER SYMBOL VALUE UN								
Peak Pulse Power (tp = 8/20µs) - See Figure 1	P <sub>pp</sub>	175	Watts					
Operating Temperature	TL	-55 to 150	°C					
Storage Temperature	Τ <sub>stg</sub>	-55 to 150	°C					
Peak Pulse Current (tp = 8/20µs)	I <sub>pp</sub>	5	Amps					

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified									
PART NUMBER (Note 1)	DEVICE MARKING	RATED STAND-OFF VOLTAGE V <sub>WM</sub> VOLTS	MINIMUM BREAKDOWN VOLTAGE @ 1mA V <sub>(BR)</sub> VOLTS	MAXIMUM SNAP BACK VOLTAGE @ I <sub>SB</sub> = 50mA V <sub>SB</sub> VOLTS	MAXIMUM CLAMPING VOLTAGE (Fig. 2) @ I <sub>p</sub> = 1A V <sub>c</sub> VOLTS	MAXIMUM LEAKAGE CURRENT @V <sub>wm</sub> Ι <sub>D</sub> μΑ	TYPICAL CAPACITANCE @0V, 1MHz C pF		
ESOT3.3LC-2	E3	3.3	3.5	3.3	6.5	2	15		
NOTES 1. Test between pins 2 to 3 and 1 to 3.									

# **TYPICAL DEVICE CHARACTERISTICS**


05185

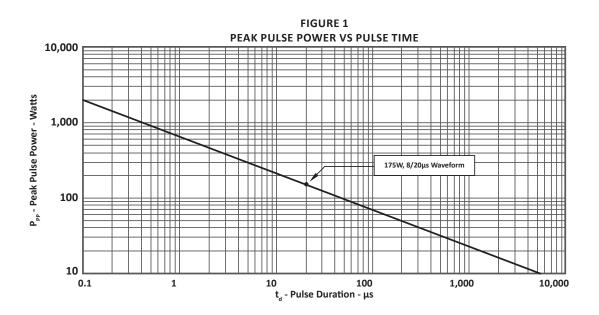


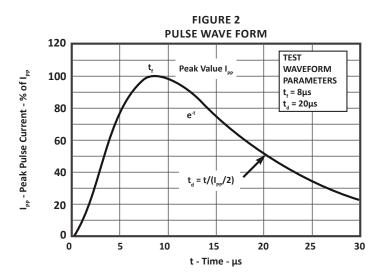


## SOT-23 PACKAGE INFORMATION

OUTLINE DIMENSIONS								
DIM	MILLIN	IETERS	INCHES					
	MIN	MAX	MIN	MAX				
А	2.80	3.04	0.110	0.120				
В	1.20	1.40	0.047	0.055				
С	0.89	1.11	0.035	0.044				
D	0.37	0.50	0.015	0.020				
G	1.78	2.04	0.070	0.081				
н	0.013	0.100	0.001	0.004				
J	0.085	0.177	0.003	0.007				
К	0.45	0.60	0.018	0.024				
L	0.89	1.02	0.035	0.040				
S	2.10	2.50	0.083	0.098				
V	0.45	0.60	0.018	0.024				







#### NOTES

05183


1. Controlling dimension: inches.

2. Dimensioning and tolerances per ANSI Y14.5M, 1985.

3. Pin 3 is the cathode (Unidirectional Only)


4. Dimensions are exclusive of mold flash and metal burrs.

PAD LAYOUT DIMENSIONS								
DIM	MILLIN	IETERS	INCHES					
	MIN	MAX	MIN	MAX				
А	0.71	0.97	0.028	0.038				
В	1.88 2.13		0.074	0.084				
С	0.71 0.97 0.028 0.0							
D	D 0.81 1.07 0.032 0.042							
NOTES 1. Controlling dimension: inches.								



## TAPE AND REEL

05185

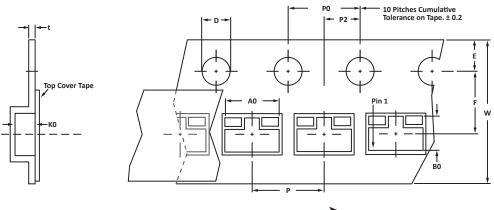

User Direction of Feed

SPECIFICATIONS												
REEL DIA.	TAPE WIDTH	A0	В0	КО	D	E	F	w	PO	P2	Р	tmax
178mm (7")	8mm	3.15 ± 0.10	2.77 ± 0.10	1.30 ± 0.10	1.55 ± 0.10	1.75 ± 0.10	3.50 ± 0.05	8.00 ± 0.30	4.00 ± 0.10	2.00 ± 0.05	$4.00 \pm 0.10$	0.228
NOTES 1. Dimensions are in millimeters.												

Surface mount product is taped and reeled in accordance with EIA-481.

3. Suffix - T7 = 7'' Reel - 3,000 pieces per 8mm tape.

4. Suffix - T13 = 13" Reel - 10,000 pieces per 8mm tape.

Marking on Part - marking code (see page 2) and date code.

Package outline, pad layout and tape specifications per document number 06012.R2 8/10.

ORDERING INFORMATION								
BASE PART NUMBER LEADFREE SUFFIX TAPE SUFFIX QTY/REEL REEL SIZE TUBE Q								
ESOT3.3LC-2	-LF	-T7	3000	7"	n/a			
ESOT3.3LC-2	-LF	-T13	10,000	13″	n/a			
This device is only available in a Lead-Free configuration.								

## COMPANY INFORMATION

#### **COMPANY PROFILE**

In business more than 20 years, ProTek Devices<sup>™</sup> is a privately-held company located in Tempe, Arizona, that offers a product line of transient voltage suppressors (TVS); avalanche breakdown diodes; steering diode TVS arrays and other surge suppressor component products. These TVS devices protect electronic systems from the effects of lightning, electrostatic discharge (ESD), nuclear electromagnetic pulses (NEMP), inductive switching and EMI / RFI. ProTek Devices also offers high performance interface and linear products that include analog switches; multiplexers; LED drivers; audio control ICs; RF and related high frequency products. The analog devices work in a host of consumer; industrial; automotive and other applications.

#### CONTACT US

#### **Corporate Headquarters**

2929 South Fair Lane Tempe, Arizona 85282 USA

### By Telephone

General: 602-431-8101 Sales: & Marketing: 602-414-5109 Customer Service: 602-414-5114 Product Technical Support: 602-414-5107

#### By Fax

General: 602-431-2288

#### By E-mail:

Sales: <u>sales@protekdevices.com</u> Customer Service: <u>service@protekdevices.com</u> Technical Support: <u>support@protekdevices.com</u>

#### ProTek Devices (Asia Pacific) Pte. Ltd.

8 Ubi Road 2, #06-19 Zervex Singapore - 408538 Tel: +65-67488312 Fax: +65-67488313

Web www.protekdevices.com

COPYRIGHT © ProTek Devices 2007 - This literature is subject to all applicable copyright laws and is not for resale in any manner.

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice.

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance. ProTek assumes no responsibility with respect to the selection or specifications of such products. ProTek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ProTek assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability without limitation special, consequential or incidental damages.

LIFE SUPPORT POLICY: ProTek Devices products are not authorized for use in life support systems without written consent from the factory.