

date 01/19/2012

page 1 of 4

SERIES: VSKM-S10 Series | **DESCRIPTION:** MEDICAL SWITCHING POWER SUPPLY

FEATURES

- Up to 10 W continuous power
- Compact board mount design
- Universal input (85~264 Vac / 120~370 Vdc)
- Single output from 3.3 to 24 V
- Over current and short circuit protections
- Full medical approvals
- Efficiency up to 80%






| MODEL | output voltage | output current | output power | ripple and noise¹ | efficiency |
|---------------|-------------------|-------------------|-----------------|----------------------|------------|
| | (Vdc) | max (A) | max (W) | typ (mVp-p) | typ (%) |
| VSKM-S10-3R3U | 3.3 | 2 | 6.6 | 50 | 70 |
| VSKM-S10-5U | 5 | 2 | 10 | 50 | 74 |
| VSKM-S10-9U | 9 | 1.1 | 10 | 50 | 76 |
| VSKM-S10-12U | 12 | 0.9 | 10 | 50 | 76 |
| VSKM-S10-15U | 15 | 0.7 | 10 | 50 | 78 |
| VSKM-S10-24U | 24 | 0.45 | 10 | 50 | 80 |

Notes: 1. Ripple and noise measured at 20 MHz bandwidth

PART NUMBER KEY



INPUT

| parameter | conditions/description | min | typ | max | units |
|--------------------------------------|--------------------------|-----------|------------|------------|------------|
| voltage | | 85 120 | | 264 370 | Vac Vdc |
| frequency | | 47 | | 63 | Hz |
| input current | at 110 Vac at 230 Vac | | 230 150 | | mA mA |
| inrush current | at 110 Vac at 230 Vac | | 10 20 | | A A |
| external input fuse (recommended) | slow blow, 250 V | | 2 | | А |
| leakage current | 230 V ac, 50 Hz | | 0.1 | | mA |

OUTPUT

| parameter | conditions/description | min | typ | max | units |
|----------------------------|-------------------------------|-----|----------|-----|--------|
| line regulation | | | ±0.5 | | % |
| load regulation | 10 ~ 100% | | ±1 | | % |
| temperature coefficient | | | 0.02 | | %/°C |
| hold-up time | at 230 Vac | | 50 | | ms |
| voltage set point accuracy | 3.3 V output all other models | | ±3 ±2 | | % % |
| switching frequency | | | 60 | | kHz |

PROTECTIONS

| parameter | conditions/description | min | typ | max | units |
|--------------------------|---|------|-----|-----|-------|
| over current protection | | | | 110 | % |
| short circuit protection | auto recovery with no damage from a short on any ou | tput | | | |

SAFETY & COMPLIANCE


| parameter | conditions/description | min | typ | max | units |
|------------------------------------|---|---------|-----|-----|-------|
| isolation voltage | primary to secondary (for 1 minute) | 4,000 | | | Vac |
| safety approvals | IEC 60601-1, EN 60601-1, UL 60601-1 | | | | |
| safety class | class II | | | | |
| EMI/EMC ¹ | EN 55011 (level B), IEC/EN 61000-4-2 level 4 (8kV/15kV), IEC/EN 61000-4-3, IEC/EN 61000-4-4 level 4 (4kV), IEC/EN 61000-4-5 level 4 (2kV/4kV) | | | | |
| RoHS compliant | yes | | | | |
| MTBF | 25°C | 300,000 | | | hrs |
| Notes: 1. external EMC application | on circuit is required | | | | |

ENVIRONMENTAL


| parameter | conditions/description | min | typ | max | units |
|-----------------------|------------------------|-----|-----|-----|-------|
| operating temperature | | -25 | | 70 | °C |
| storage temperature | | -40 | | 105 | °C |
| case temperature | | | | 95 | °C |
| operating humidity | non-condensing | | | 95 | % |

DERATING CURVES

1. output power vs. ambient temperature

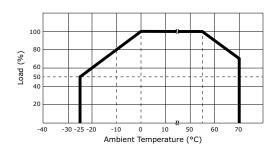

2. output power vs. input voltage

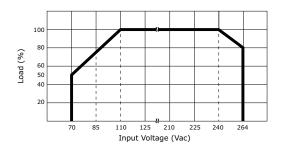


MECHANICAL


| parameter | conditions/description | min | typ | max | units |
|---------------|--|-----|-----|-----|-------|
| dimensions | 2.1 x 1.12 x 0.75 inch (53.5 x 28.5 x 19.0 mm) | | | | |
| case material | UL94V-0 | | | | |
| weight | | 47 | 50 | 53 | g |

MECHANICAL DRAWING

units: mm [inches] tolerance: ±0.5 [±0.02]

pin section tolerance: ± 0.10 mm [± 0.004]

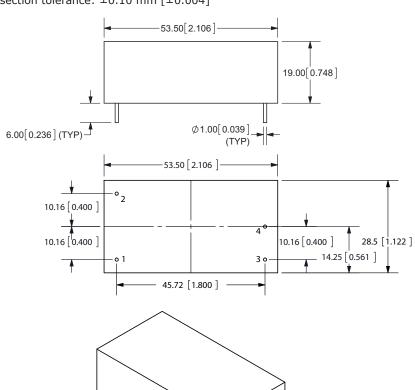


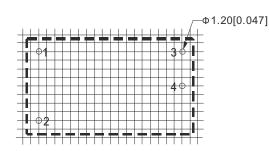

recommended PCB footprint (top view) grid: 2.54 mm (0.10 inch)

| PIN CONNECTIONS | | | | |
|-----------------|----------|--|--|--|
| PIN | FUNCTION | | | |
| 1 | AC(N) | | | |
| 2 | AC(L) | | | |
| 3 | +Vo | | | |
| 4 | -Vo | | | |

TYPICAL APPLICATION CIRCUIT

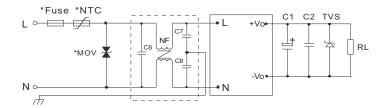

| EXTERNAL CAPACITORS TYPICAL VALUE (Unit: μF) | | | | | | |
|--|-------------|-------------|----------|--|--|--|
| MODEL | C1 | C2 | TVS | | | |
| VSKM-S10-3R3U | 220 μF/10 V | 0.1 μF/50 V | P6KE6.8A | | | |
| VSKM-S10-5U | 220 μF/10 V | 0.1 μF/50 V | P6KE6.8A | | | |
| VSKM-S10-9U | 120 μF/25 V | 0.1 μF/50 V | P6KE12A | | | |
| VSKM-S10-12U | 120 μF/25 V | 0.1 μF/50 V | P6KE20A | | | |
| VSKM-S10-15U | 120 μF/25 V | 0.1 μF/50 V | P6KE20A | | | |
| VSKM-S10-24U | 68 μF/35 V | 0.1 μF/50 V | P6KE30A | | | |

- Notes: 1. Output filtering capacitor C1 is an electrolytic capacitor. It is recommended to use high frequency and low impedance electrolytic capacitors. For capacitance and current of capacitor please refer to manufacture's datasheet. Voltage derating of capacitor should be 80% or above. C2 is ceramic capacitor, it is used to filter high frequency noise. TVS is a recommended component to protect post-circuits (if converter fails).
 - 2. MOV is required to protect the device under surge.
 - 2. It is recommended to use a 2A/250V slow blow FUSE. External input NTC is recommended to use 5D-9.
 - 3. If EMC performance is required, it is recommended to add "EMC filter" at the input end (see EMC Application Figure).

C6: X capacitor, recommended parameter 0.1µF/275V:

C7,C8: Y capacitor, recommended parameter 2200pF/400V;

NF: common model choke, recommended inductance is about 10mH-30mH.

REVISION HISTORY

| rev | description | date |
|-----|-----------------|------------|
| 1.0 | initial release | 01/16/2012 |

The revision history provided is for informational purposes only and is believed to be accurate.



Headquarters 20050 SW 112th Ave. Tualatin, OR 97062 800.275.4899

Fax 503.612.2383 cui.com techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.