

In - Series Adapters - TNC

Model Number

ADT-2596-MF-TNC-02

SPECIFICATIONS

Frequency: DC - 18.0 GHz

VSWR: 1.05 @ DC - 4.0 GHz


1.10 @ 4.0 - 8.0 GHz

1.15 @ 8.0 - 18.0 GHz

Impedance: 50 Ohms

Finish: Passivated Stainless Steel

TNC Male Plug to TNC Female Jack



Model Number

ADT-2598-FF-TNC-02

SPECIFICATIONS

Frequency: DC - 18.0 GHz

VSWR: 1.05 @ DC - 4.0 GHz


1.10 @ 4.0 - 8.0 GHz

1.15 @ 8.0 - 18.0 GHz

Impedance: 50 Ohms

Finish: Passivated Stainless Steel

TNC Female Jack to TNC Female Jack



Model Number

ADT-2597-MM-TNC-02

SPECIFICATIONS

Frequency: DC - 18.0 GHz

VSWR: 1.05 @ DC - 4.0 GHz


1.10 @ 4.0 - 8.0 GHz

1.15 @ 8.0 - 18.0 GHz

Impedance: 50 Ohms

Finish: Passivated Stainless Steel

TNC Male Plug to TNC Male Plug



Model Number

ADT-2898-FF-TNC-02

SPECIFICATIONS

Frequency: DC - 18.0 GHz

VSWR: 1.05 @ DC - 4.0 GHz


1.10 @ 4.0 - 8.0 GHz

1.15 @ 8.0 - 18.0 GHz

Impedance: 50 Ohms

Finish: Passivated Stainless Steel

TNC Female Jack to TNC Female Jack - Bulkhead Mount

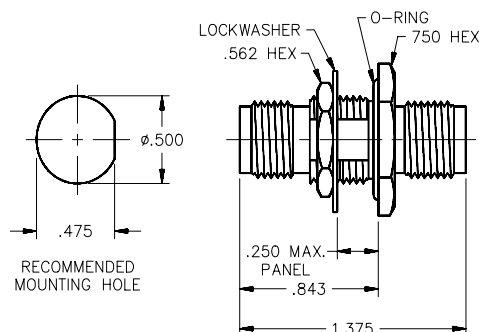

Note: Also available in flanged panel mount as ADT-2826-FF-TNC-02