


# Dual Row Female Insulation Displacement Connector



A

## 70451 Series "A" Version

- End-to-end and side-by-side stackable on .100" grid
- Mates with Molex dual row headers 8723, 8724, 70206, 70203 and 8624; Also mates with Molex Interim Clip 70013 and ribbon cable style headers (MX50)
- Circuit sizes 4-54

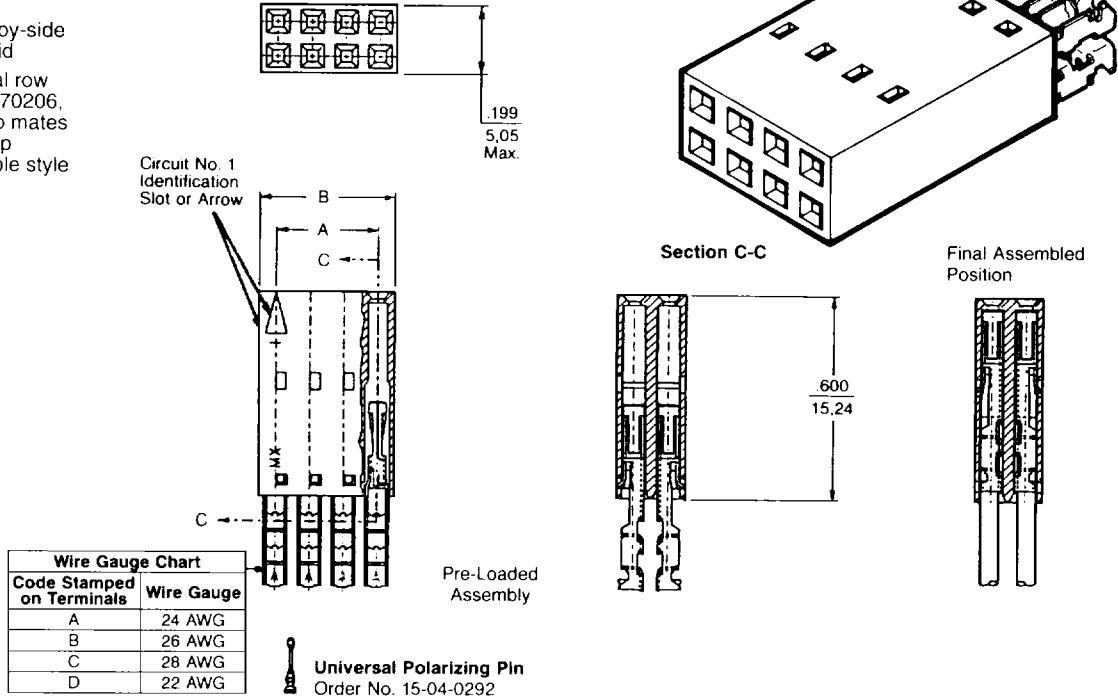

### Dimensions

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
4	.100 2,54	.199 5,05	16	.700 17,78	.799 20,29	26	1.200 30,48	1.299 32,99	36	1.700 43,18	1.799 45,69	46	2.200 55,88	2.299 58,39
6	.200 5,08	.299 7,59	18	.800 20,32	.899 22,83	28	1.300 33,02	1.399 35,53	38	1.800 45,72	1.899 48,23	48	2.300 58,42	2.399 60,93
8	.300 7,62	.399 10,13	20	.900 22,86	.999 25,37	30	1.400 35,56	1.499 38,07	40	1.900 48,26	1.999 50,77	50	2.400 60,96	2.499 63,47
10	.400 10,16	.499 12,67	22	1.000 25,40	1.099 27,91	32	1.500 38,10	1.599 40,61	42	2.000 50,80	2.099 53,31	52	2.500 63,50	2.599 66,01
12	.500 12,70	.599 15,21	24	1.100 27,94	1.199 30,45	34	1.600 40,64	1.699 43,15	44	2.100 53,34	2.199 55,85	54	2.600 66,04	2.699 68,55
14	.600 15,24	.699 17,75												

### Ordering Information

PLATING: 15 MICROINCHES GOLD	PLATING: 30 MICROINCHES GOLD	PLATING: 150 MICROINCHES TIN/LEAD
<b>Wire Accommodation 28 AWG</b>		
<b>Order No. 14-56-5XX5</b> Replace "XX" with number of circuits, 04-54 (even number only)	<b>Order No. 14-56-6XX4</b> Replace "XX" with number of circuits, 04-54 (even number only)	<b>Order No. 14-56-4XX6</b> Replace "XX" with number of circuits, 04-54 (even number only)
<b>Wire Accommodation 26 AWG</b>		
<b>Order No. 14-56-5XX2</b> Replace "XX" with number of circuits, 04-54 (even number only)	<b>Order No. 14-56-6XX1</b> Replace "XX" with number of circuits, 04-54 (even number only)	<b>Order No. 14-55-2XX7</b> Replace "XX" with number of circuits, 04-54 (even number only)
<b>Wire Accommodation 24 AWG</b>		
<b>Order No. • 14-56-4XX9</b> Replace "XX" with number of circuits, 04-54 (even number only)	<b>Order No. 14-56-5XX8</b> Replace "XX" with number of circuits, 04-54 (even number only)	<b>Order No. 14-55-2XX4</b> Replace "XX" with number of circuits, 04-54 (even number only)
<b>Wire Accommodation 22 AWG</b>		
<b>Order No. 14-57-2XX6</b> Replace "XX" with number of circuits, 08-54 (even number only)	<b>Order No. 14-57-4XX1</b> Replace "XX" with number of circuits, 04-54 (even number only)	<b>Order No. 14-57-1XX0</b> Replace "XX" with number of circuits, 04-54 (even number only)

□ Highlighted area denotes preferred standard product. Usually available with shorter leadtimes

• U.S. Standard Product, available through Molex franchised distributors.