




MSB6N70 700V N-Channel MOSFET


GENERAL DESCRIPTION

The MSB6N70 is a N-channel enhancement-mode MOSFET , providing the designer with the best combination of fast switching, ruggedized device design, low on-resistance and cost effectiveness.



FEATURES

- Low On Resistance
- Simple Drive Requirement
- Low Gate Charge
- Fast Switching Characteristic
- RoHS compliant / Halogen free package available

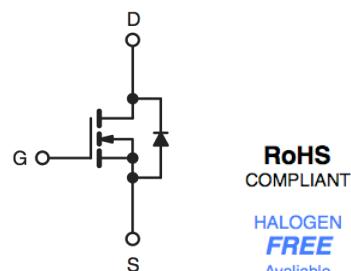

Absolute Maximum Ratings (Tc=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	VDS	700	V
Continuous Drain Current @ TC=25°C	ID	5.5	A
Continuous Drain Current @ TC=100°C	ID	3.5	A
Pulsed Drain Current	IDM	22	A
Gate-Source Voltage	VGS	±30	V
Single Pulsed Avalanche Energy	EAS	350	mJ
Avalanche Current	IAR	5.5	A
Repetitive Avalanche Energy	EAR	14.7	mJ
Peak Diode Recovery dV/dt	dV/dt	5.5	V/ns
Power Dissipation (TC=25°C)	PD	48	W
Power Dissipation (TC=100°C)		0.38	W
Operating Junction and Storage Temperature	Tj, Tstg	-55~+150	°C

NOTE:

1. Repetitive Rating : Pulse width limited by maximum junction temperature
2. IAS=5.5A, VDD=50V, RG=25Ω, Starting TJ =25°C
3. ISD≤5.5A, di/dt≤300A/μs, VDD≤BVDS, Starting TJ =25 °C
4. Pulse Test : Pulse Width ≤ 300μs, Duty Cycle ≤ 2%
5. Essentially Independent of Operating Temperature



Brückewell MSB6N70 700V N-Channel MOSFET

Characteristics (T_c=25°C, unless otherwise specified)

Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Static Characteristics					
VGS	VDS = VGS, ID=250µA	2.0	-	4.0	V
*RDS(ON)	VGS =10V, ID =2.8A	-	1.5	1.8	mΩ
BVDSS	VGS=0, ID=250µA	700	-	-	V
ΔBVDSS/ΔT _j	Reference to 25°C, ID=250µA		0.70		
IDSS	VDS =700V, VGS =0V	-	-	1	uA
	VDS =560V, VGS =0, T _j =125°C	-	-	10	
IGSSF	VGS =30V, VDS =0V	-	-	100	nA
IGSSR	VGS =-30V, VDS =0V	-	-	-100	nA
Dynamic Characteristics					
Ciss	VGS=0V, VDS=25V, f=1MHz	-	1100	1500	pF
Coss		-	110	150	
Crss		-	12	16	
td(ON)	VDS =350V, ID =5.5A, RG = 25 Ω	-	10	30	ns
tr		-	35	80	
td(OFF)		-	45	100	
tf		-	40	90	
Qg	VDS =560V, ID =5.5A, VGS =10V	-	29	37	nC
Qgs		-	5	-	
Qgd		-	11	-	
Source-Drain Diode Characteristics					
IS		-	-	5.5	A
ISM		-	-	22	
VSD	IS = 5.5A, VGS = 0 V	-	-	1.5	V
trr	IS = 5.5 A, VGS = 0 V diF/dt = 100 A/µs	-	390	-	nS
Qrr		-	3.6	-	nC

Brückewell MSB6N70 700V N-Channel MOSFET

- Characteristic Curves

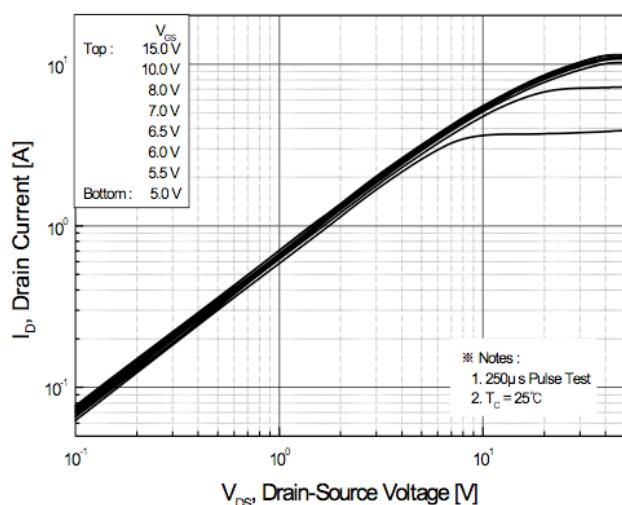


Figure 1. On Region Characteristics

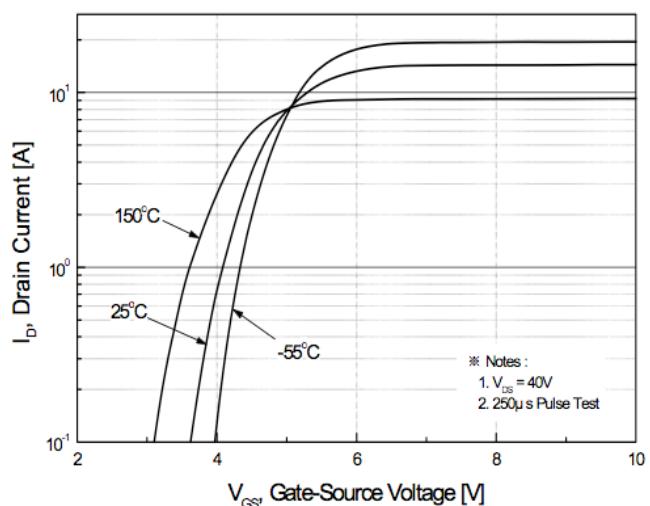


Figure 2. Transfer Characteristics

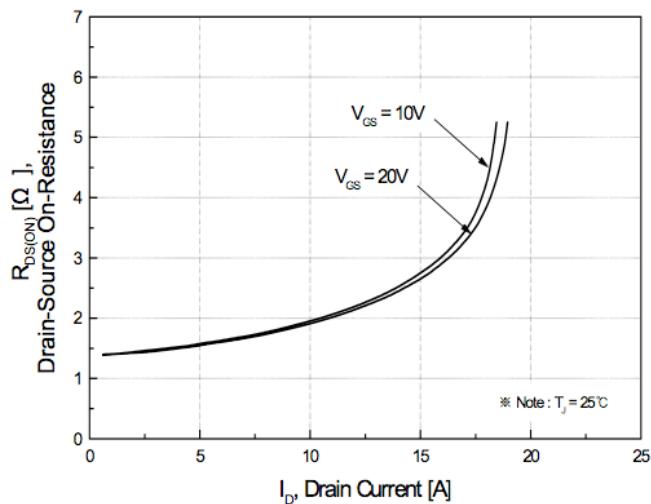


Figure 3. On Resistance Variation vs Drain Current and Gate Voltage

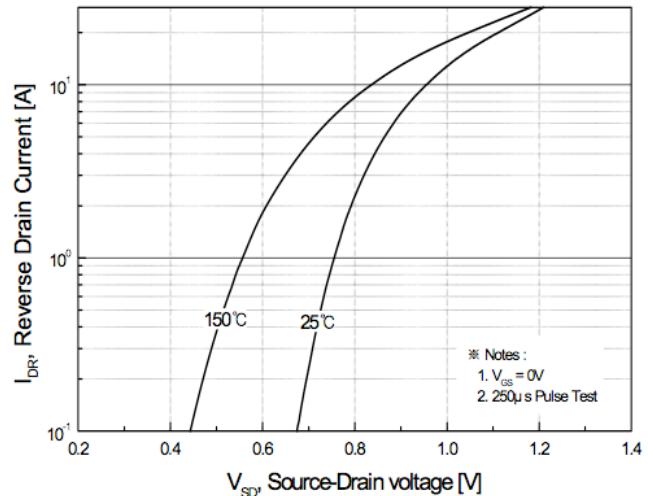


Figure 4. Body Diode Forward Voltage Variation with Source Current and Temperature

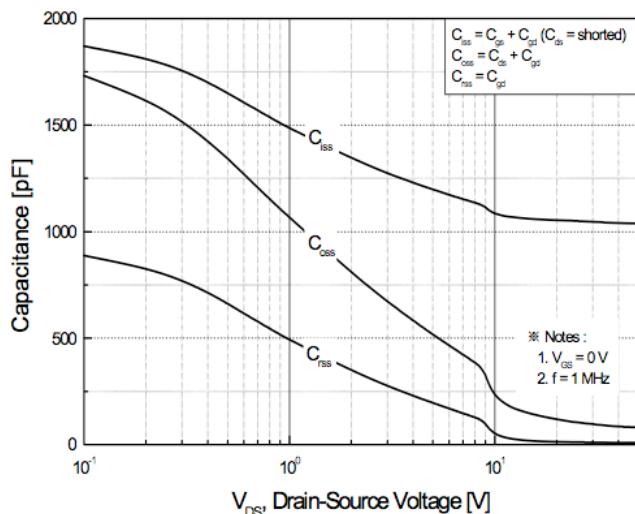


Figure 5. Capacitance Characteristics






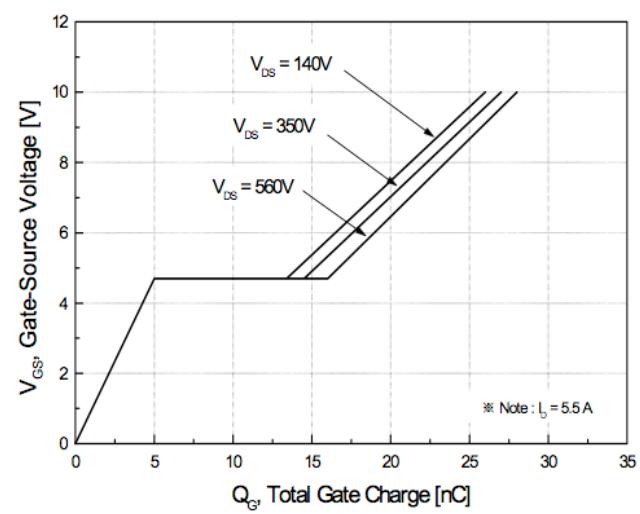


Figure 6. Gate Charge Characteristics

- Characteristic Curves

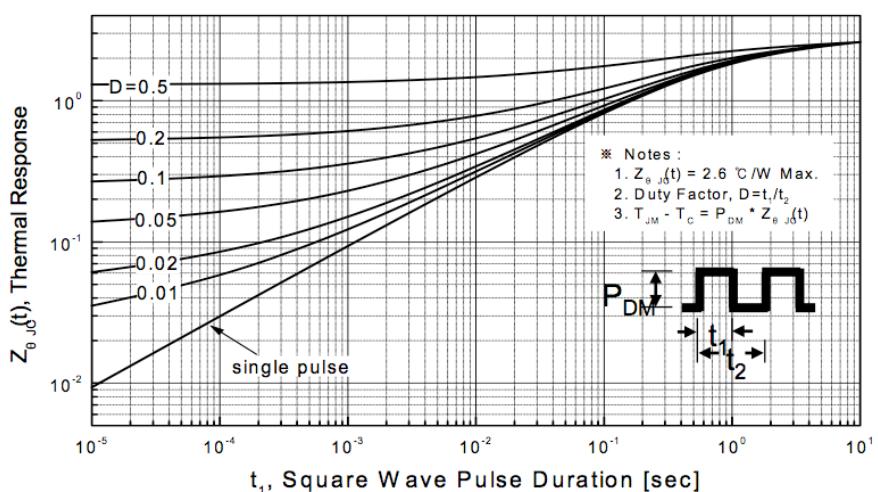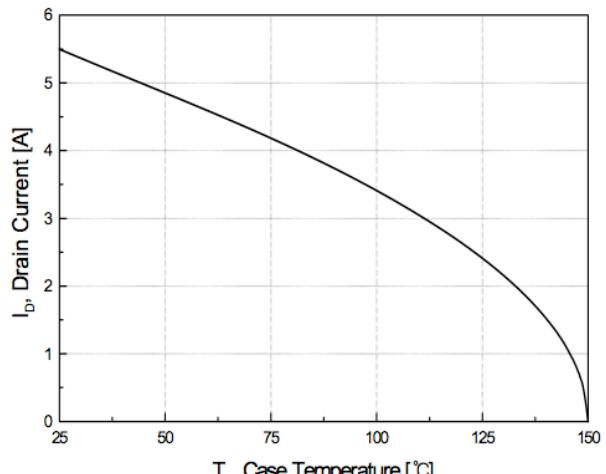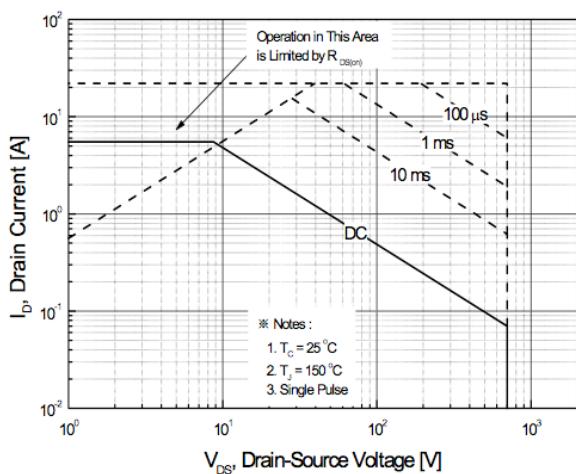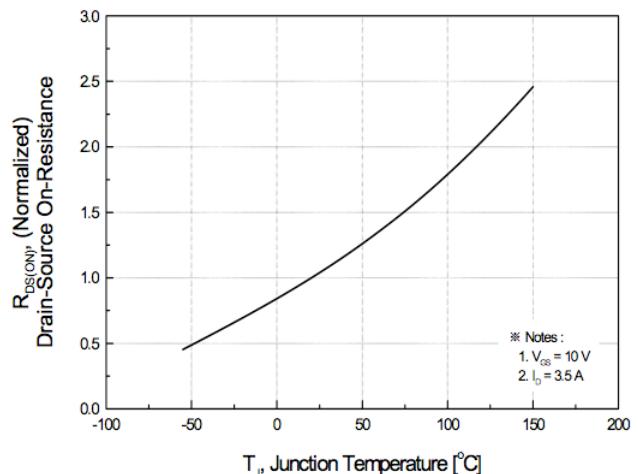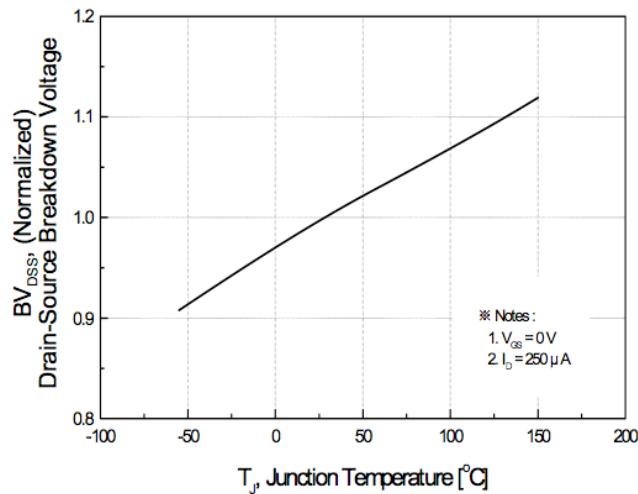

Brückewell MSB6N70 700V N-Channel MOSFET

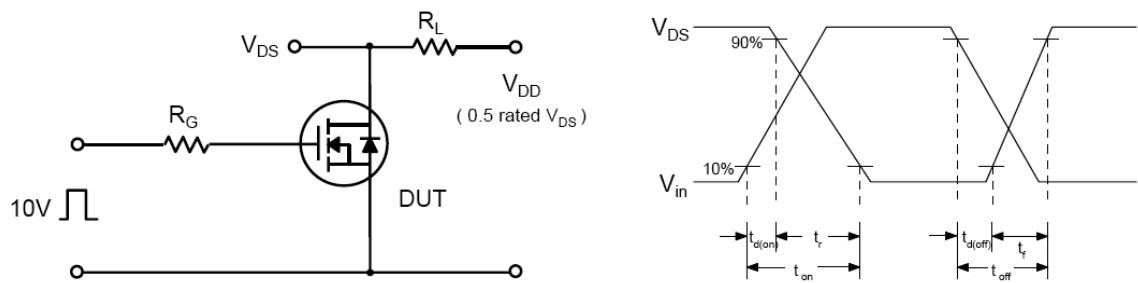


Fig 12. Resistive Switching Test Circuit & Waveforms

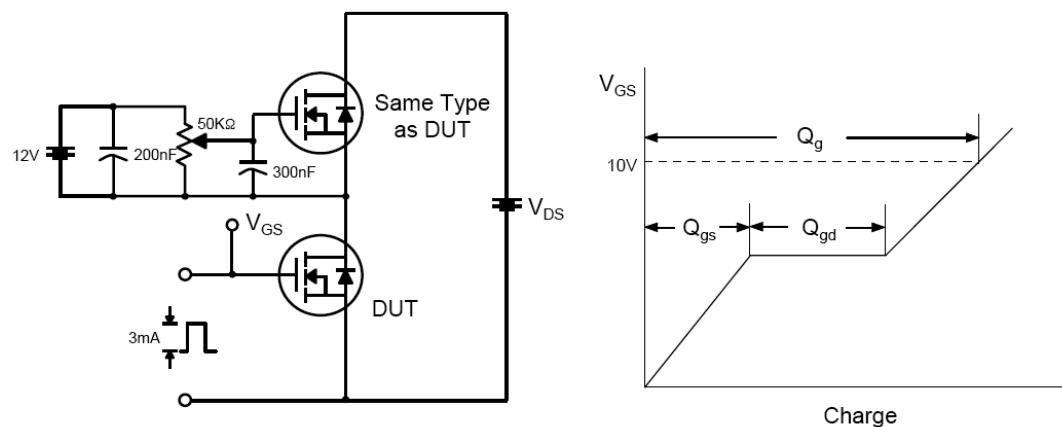


Fig 13. Gate Charge Test Circuit & Waveform

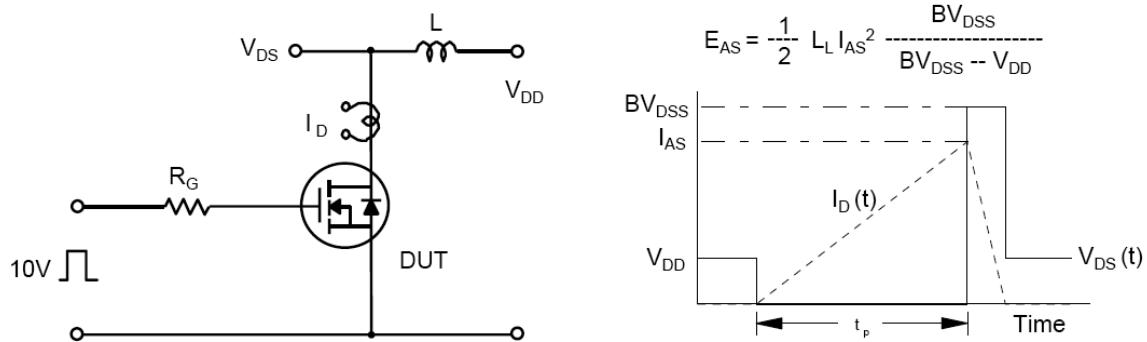


Fig 14. Unclamped Inductive Switching Test Circuit & Waveforms

Brückewell MSB6N70 700V N-Channel MOSFET

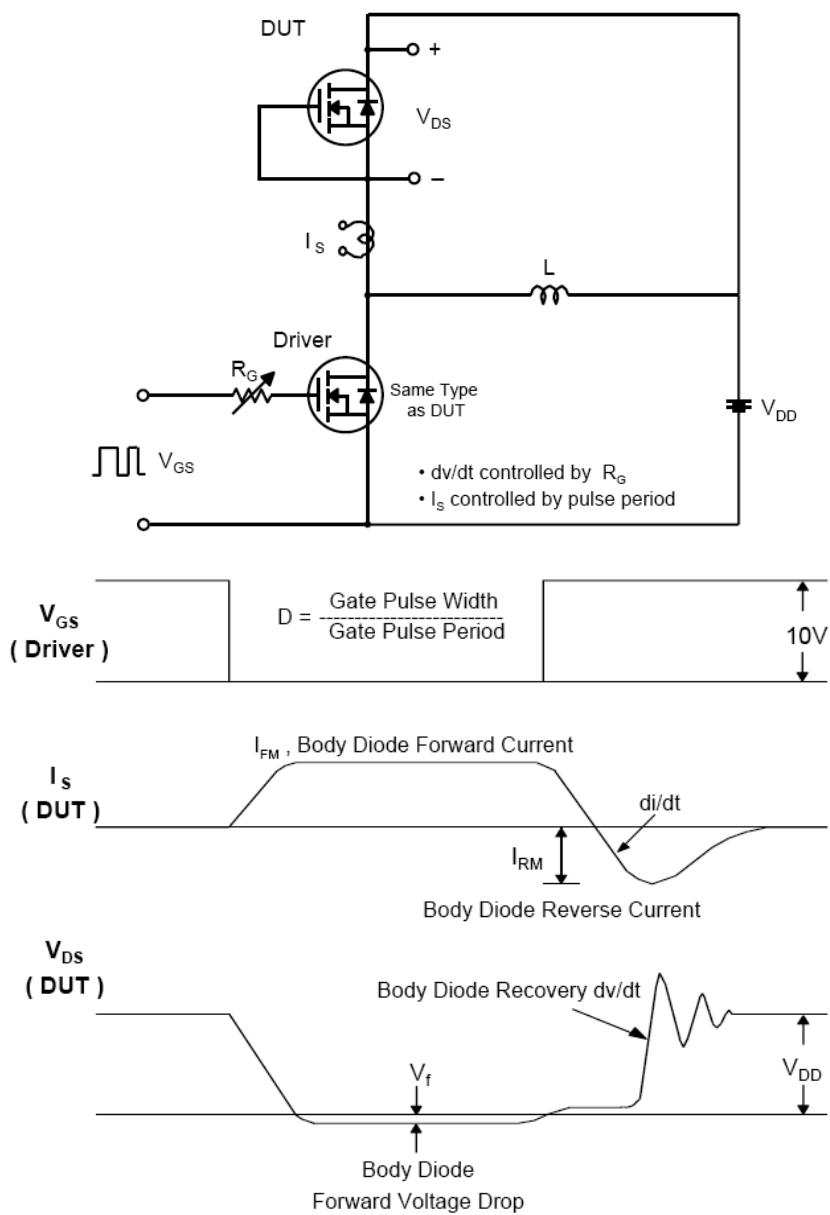



Fig 15. Peak Diode Recovery dv/dt Test Circuit & Waveforms



MSB6N70 700V N-Channel MOSFET

Package Dimensions

Dimensions in Millimeters

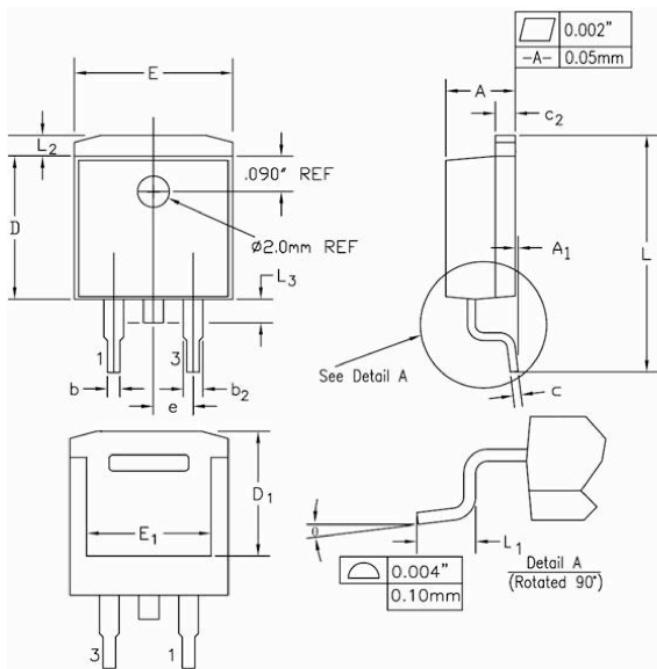

SYMBOL	INCHES		MILLIMETERS		NOTES
	MIN	MAX	MIN	MAX	
A	0.170	0.180	4.32	4.57	
A ₁	-	0.010	-	0.25	
b	0.028	0.037	0.71	0.94	
b ₂	0.045	0.055	1.15	1.40	
c	0.018	0.024	0.46	0.61	
c ₂	0.048	0.055	1.22	1.40	
D	0.350	0.370	8.89	9.40	
D ₁	0.315	0.324	8.01	8.23	2
E	0.395	0.405	10.04	10.28	
E ₁	0.310	0.318	7.88	8.08	2
e	0.100 BSC.	0.100 BSC.	2.54 BSC.	2.54 BSC.	
L	0.580	0.620	14.73	15.75	
L ₁	0.090	0.110	2.29	2.79	4
L ₂	0.045	0.055	1.15	1.39	
L ₃	0.050	0.070	1.27	1.77	3
θ	0°	8°	0°	8°	



MSB6N70 700V N-Channel MOSFET

Legal Disclaimer Notice

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Bruckewell Technology Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Bruckewell"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Bruckewell makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Bruckewell disclaims

- (i) Any and all liability arising out of the application or use of any product.
- (ii) Any and all liability, including without limitation special, consequential or incidental damages.
- (iii) Any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Bruckewell's knowledge of typical requirements that are often placed on Bruckewell products in generic applications.

Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time.

Product specifications do not expand or otherwise modify Bruckewell's terms and conditions of purchase, including but not limited to the warranty expressed therein.