

Model Name: T315HW04 V0

Issue Date: 2009/10/26

()Preliminary Specifications(*)Final Specifications

Customer Signature	Date	AUO	Date					
Approved By		Approval By PM Director						
,		Frank Hsu Frank Hs	۵.					
Note		Reviewed By RD Director						
		Eugene CC Chen						
		Engene Chen						
		Reviewed By Project Leader						
		HS Huang						
		718 Thurs						
		Prepared By PM						
		Hanson Wang						
		Janson Wang						



Contents

No		
		CONTENTS
		RECORD OF REVISIONS
1		GENERAL DESCRIPTION
2		ABSOLUTE MAXIMUM RATINGS
3		ELECTRICAL SPECIFICATION
	3-1	ELECTRIACL CHARACTERISTICS
	3-2	INTERFACE CONNECTIONS
	3-3	SIGNAL TIMING SPECIFICATION
	3-4	SIGNAL TIMING WAVEFORM
	3-5	COLOR INPUT DATA REFERENCE
	3-6	POWER SEQUENCE
	3-7	BACKLIGHT SPECIFICATION
4		OPTICAL SPECIFICATION
5		MECHANICAL CHARACTERISTICS
6		RELIABILITY TEST ITEMS
7		INTERNATIONAL STANDARD
	7-1	SAFETY
	7-2	EMC
8		PACKING
	8-1	DEFINITION OF LABEL
	8-2	PACKING METHODS
	8-3	PALLET AND SHIPMENT INFORMATION
9		PRECAUTION
	9-1	MOUNTING PRECAUTIONS
	9-2	OPERATING PRECAUTIONS
	9-3	ELECTROSTATIC DISCHARGE CONTROL
	9-4	PRECAUTIONS FOR STRONG LIGHT EXPOSURE
	9-5	STORAGE
	9-6	HANDLING PRECAUTIONS FOR PROTECT FILM



Record of Revision

Version	Date	Page	Description
0.1	2009/08/25		First release
0.2	2009/10/02		Final spec



1. General Description

This specification applies to the 31.5 inch Color TFT-LCD Module T315HW04 V0. This LCD module has a TFT active matrix type liquid crystal panel 1,920 x 1080 pixels, and diagonal size of 31.5 inch. This module supports 1,920 x 1080 mode. Each pixel is divided into Red, Green and Blue sub-pixels or dots which are arranged in vertical stripes. Gray scale or the brightness of the sub-pixel color is determined with a 8-bit gray scale signal for each dot.

The T315HW04 V0 has been designed to apply the 8-bit 2 channel LVDS interface method. It is intended to support displays where high brightness, wide viewing angle, high color saturation, and high color depth are very important.

* General Information

Items	Specification	Unit	Note
Active Screen Size	31.55	inch	
Display Area	698.4 (H) x 392.85 (V)	mm	
Outline Dimension	760.0 (H) x 450.0 (V) x 51.0(D)	mm	With inverter
Driver Element	a-Si TFT active matrix		
Display Colors	8 bit, 16.7M	Colors	
Number of Pixels	1,920 x 1080	Pixel	
Pixel Pitch	0.36375	mm	
Pixel Arrangement	RGB vertical stripe		
Display Operation Mode	Normally Black		
Surface Treatment	Anti-Glare, 3H		Haze=11%



2. Absolute Maximum Ratings

The followings are maximum values which, if exceeded, may cause faulty operation or damage to the unit


Item	Symbol	Min	Max	Unit	Conditions
Logic/LCD Drive Voltage	Vcc	-0.3	14	[Volt]	Note 1
Input Voltage of Signal	Vin	-0.3	4	[Volt]	Note 1
Operating Temperature	TOP	0	+50	[°C]	Note 2
Operating Humidity	HOP	10	90	[%RH]	Note 2
Storage Temperature	TST	-20	+60	[°C]	Note 2
Storage Humidity	HST	10	90	[%RH]	Note 2
Panel Surface Temperature	PST		65	[°C]	Note 3

Note 1: Duration:50 msec.

Note 2 : Maximum Wet-Bulb should be 39[°]C and No condensation.

The relative humidity must not exceed 90% non-condensing at temperatures of 40° C or less. At temperatures greater than 40° C, the wet bulb temperature must not exceed 39° C.

Note 3: Surface temperature is measured at 50°C Dry condition

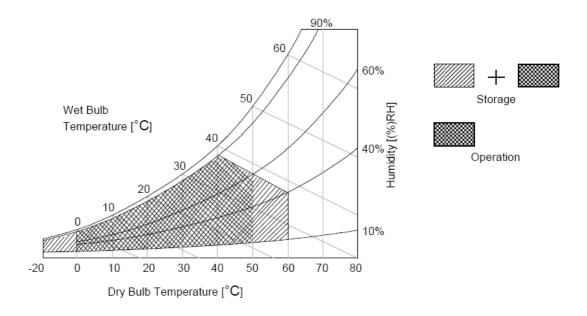



3. Electrical Specification

The T315HW04 V0 requires two power inputs. One is employed to power the LCD electronics and to drive the TFT array and liquid crystal. The second input for BLU is to power inverter.

3.1 Electrical Characteristics

	Parameter	Symbol		Value		Unit	Note
	raidilletei	Symbol	Min.	Тур.	Max	Offic	Note
LCD							
Power Sup	ply Input Voltage	V _{DD}	10.8	12	13.2	V _{DC}	1
Power Sup	ply Input Current	I _{DD}		0.55	0.65	Α	2
Power Con	sumption	Pc		6.6	7.5	Watt	2
Inrush Cur	I _{RUSH}			2.3	Α	3	
LVDC	Differential Input High Threshold Voltage	V_{TH}		-	+100	mV_{DC}	4
LVDS Interface	Differential Input Low Threshold Voltage	V_{TL}	-100			mV_{DC}	4
Interface	Input Common Mode Voltage	V _{ICM}	0.6	1.2	1.8	V _{DC}	4
CMOS	Input High Threshold Voltage	V _{IH} (High)	2.7		3.3	V _{DC}	
Interface	Input Low Threshold Voltage	V _{IL} (Low)	0		0.6	V _{DC}	
Backlight F	Power Consumption	P _{BL}		65		Watt	
Life Time			50,000			Hours	8

Note:

1. The ripple voltage should be controlled under 10% of V_{CC}

2. Test Condition:

(1) $V_{DD} = 12.0V$


(2) Fv = 60Hz

(3) $F_{CLK} = 80 \text{ Mhz (typ.)}, 86 \text{Mhz (max)}$

(4) Temperature = 25 °C


(5) Test Pattern: White Pattern

3. Measurement condition : Rising time = 400us






4. $V_{ICM} = 1.25V$



5. Input Channel Pair Skew Margin

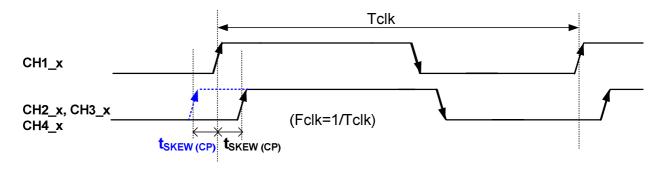

- **6.** Do not attach a conducting tape to lamp connecting wire. If the lamp wire attach to conducting tape, TFT-LCD Module have a low luminance and the inverter has abnormal action because leakage current occurs between lamp wire and conducting tape.
- 7. The relative humidity must not exceed 80% non-condensing at temperatures of 40° C or less. At temperatures greater than 40° C, the wet bulb temperature must not exceed 39° C. When operate at low temperatures, the brightness of CCFL will drop and the life time of CCFL will be reduced.
- 8. Specified values are for a single lamp only which is aligned horizontally. The lifetime is defined as the time which luminance of the lamp is 50% compared to its original value.

[Operating condition: Continuous operating at $Ta = 25\pm2^{\circ}$ C]




3.2 Interface Connections

• LCD connector: FI-RE51S-HF (JAE, LVDS connector)

PIN	Symbol	Description	PIN	Symbol	Description
1	V_{DD}	Power Supply, +12V DC Regulated	26	CH2_0+	LVDS Channel 2, Signal 0+
2	V_{DD}	Power Supply, +12V DC Regulated	27	CH2_1-	LVDS Channel 2, Signal 1-
3	V_{DD}	Power Supply, +12V DC Regulated	28	CH2_1+	LVDS Channel 2, Signal 1+
4	V_{DD}	Power Supply, +12V DC Regulated	29	CH2_2-	LVDS Channel 2, Signal 2-
5	V_{DD}	Power Supply, +12V DC Regulated	30	CH2_2+	LVDS Channel 2, Signal 2+
6	Reserved	AUO Internal Use Only	31	GND	Ground
7	GND	Ground	32	CH2_CLK-	LVDS Channel 2, Clock -
8	GND	Ground	33	CH2_CLK+	LVDS Channel 2, Clock +
9	GND	Ground	34	GND	Ground
10	CH1_0-	LVDS Channel 1, Signal 0-	35	CH2_3-	LVDS Channel 2, Signal 3-
11	CH1_0+	LVDS Channel 1, Signal 0+	36	CH2_3+	LVDS Channel 2, Signal 3+
12	CH1_1-	LVDS Channel 1, Signal 1-	37	Reserved	AUO Internal Use Only
13	CH1_1+	LVDS Channel 1, Signal 1+	38	Reserved	AUO Internal Use Only
14	CH1_2-	LVDS Channel 1, Signal 2-	39	GND	Ground
15	CH1_2+	LVDS Channel 1, Signal 2+	40	SCL	EEPROM Serial Clock
16	GND	Ground	41	SDA	EEPROM Serial Data
17	CH1_CLK-	LVDS Channel 1, Clock -	42	NC	No connection
18	CH1_CLK+	LVDS Channel 1, Clock +	43	WP	EEPROM Write Protection High(3.3V) for Writable,
					Low(GND) for Protection
19	GND	Ground	44	Panel_SEL	reserve 0603 footprint of resistor to ground
20	CH1_3-	LVDS Channel 1, Signal 3-	45	LVDS_SEL	Open/High(3.3V) for NS, Low(GND) for JEIDA
21	CH1_3+	LVDS Channel 1, Signal 3+	46	OD_SEL	Open/Low(GND): OD on, High(3.3V): OD off
22	Reserved	AUO Internal Use Only	47	NC	No connection
23	Reserved	AUO Internal Use Only	48	NC	No connection
24	GND	Ground	49	NC	No connection
25	CH2_0-	LVDS Channel 2, Signal 0-	50	TCON_RDY	Connect 220ohm resistance to 3.3V
			51	NC	No connection




LVDS Option = High/Open→NS

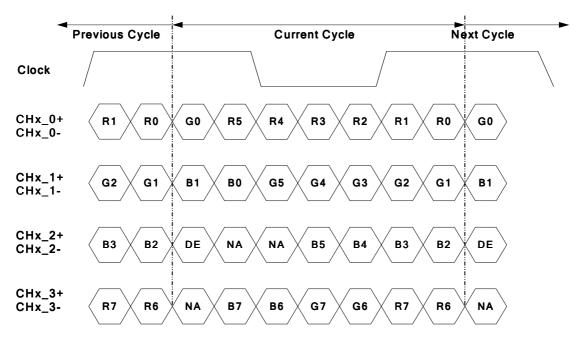

Note: x = 1, 2, 3, 4...

LVDS Option = Low→JEIDA

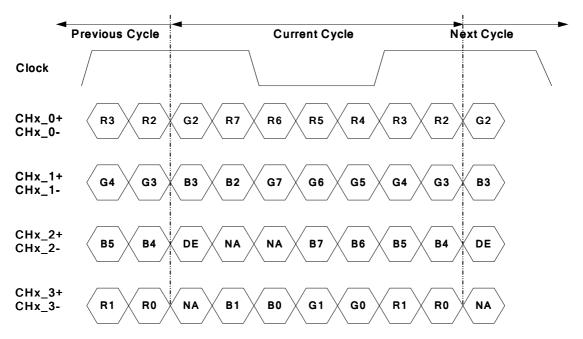

Note: x = 1, 2, 3, 4...



3.3 Signal Timing Specification

This is the signal timing required at the input of the user connector. All of the interface signal timing should be satisfied with the following specifications for its proper operation.


Signal	Item	Symbol	Min.	Тур.	Max	Unit		
	Period	Tv	1090	1125	1480	Th		
Vertical Section	Active	Tdisp (v)		1080				
	Blanking	Tblk (v)	10	45	400	Th		
	Period	Th	1030	1100	1325	Tclk		
Horizontal Section	Active	Tdisp (h)			Tclk			
	Blanking	Tblk (h)	70	140	365	Tclk		
Clock	Frequency	Fclk=1/Tclk	50	74.25	82	MHz		
Vertical Frequency	Frequency	Fv	47	60	63	Hz		
Horizontal Frequency	Frequency	Fh	60	67.5	73	KHz		

Notes:

- (1) Display position is specific by the rise of DE signal only.
 Horizontal display position is specified by the rising edge of 1st DCLK after the rise of 1st DE, is displayed on the left edge of the screen.
- (2) Vertical display position is specified by the rise of DE after a "Low" level period equivalent to eight times of horizontal period. The 1st data corresponding to one horizontal line after the rise of 1st DE is displayed at the top line of screen.
- (3) If a period of DE "High" is less than 1,920 DCLK or less than 1080 lines, the rest of the screen displays black.
- (4) The display position does not fit to the screen if a period of DE "High" and the effective data period do not synchronize with each other.



3.4 Signal Timing Waveforms

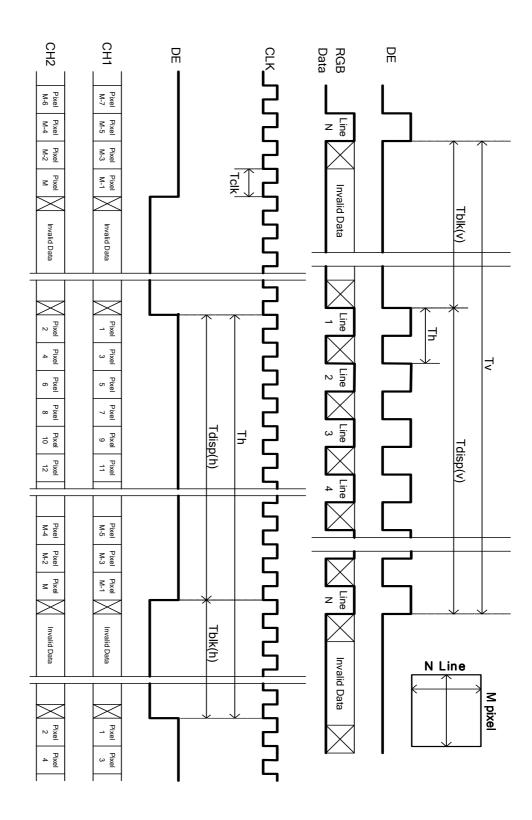



3.5 Color Input Data Reference


The brightness of each primary color (red, green and blue) is based on the 8 bit gray scale data input for the color; the higher the binary input, the brighter the color. The table below provides a reference for color versus data input.

Color Data Reference

					Input Color Data																				
	Color				RI	ΞD							GRI	EEN				BLUE							
	Coloi	MS	В					LS	SB	MS	В					LS	B	MS	В					LS	3B
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	В7	B6	B5	B4	ВЗ	B2	B1	В0
	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(255)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green(255)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
Basic	Blue(255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
Color	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	RED(000)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED(001)	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
R																									
	RED(254)	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED(255)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN(000)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN(001)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
G																									
	GREEN(254)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0
	GREEN(255)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	BLUE(000)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	BLUE(001)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
В																								, continues	
	BLUE(254)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0
	BLUE(255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1



3.6 Power Sequence for LCD

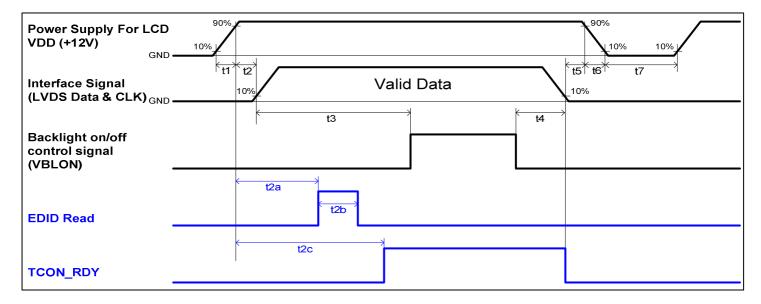

		Values									
Parameter	Min.	Type.	Max.	Unit							
t1	0.4		30	ms							
t2	0.1			ms							
t3	300			ms							
t4	0*1			ms							
t5	0			ms							
t6			*2	ms							
t7	500			ms							
t2a	10		100	ms							
t2b	0*3		100*3	ms							
t2c	10			ms							

Note:

(1) T4=0 : concern for residual pattern before BLU turn off.

(2) T6: voltage of VDD must decay smoothly after power-off. (customer system decide this value)

(3) T2b: customer decide this value



3.7 Backlight Specification (Inverter Type)

The backlight unit contains 4U CCFLs (Cold Cathode Fluorescent Lamp)

3.7.1 Electrical specification

Hom	O: h	. 1	Condition		Spec		l lucit	Nata
Item	Symb	Symbol		Min	Тур	Max	Unit	Note
Input Voltage	V_{DDB}	1	-	21.6	24	26.4	VDC	-
Input Current	I _{DDB}		VDDB=24V	2.58	2.71	2.85	ADC	1
Input Power	P _{DDB}	1	VDDB=24V	61.75	65	68.25	W	1
Inrush Current	I _{RUSH}	I	VDDB=24V	-	-	4.26	ADC	2
Operating Frequency	FBL		VDDB=24V	53	55	57	KHz	
On/Off control voltage	V	ON	VDDB=24V	2	-	5.5	VDC	-
On/Off control voltage	V_{BLON}	OFF	VDDB=24V	0	-	0.8	VDC	-
On/Off control current	I _{BLON}		VDDB=24V	-	-	1.5	mA	-
Internal PWM	V IPWM	MAX	VDDB=24V	3.0	-	3.3	VDC	-
Dimming Control Voltage	V_IPVVIVI	MIN	VDDD-24V	-	0	-	VDC	-
Internal PWM Dimming Control Current	I_IPW	M	VDDB=24V	1	-	2	mADC	-
Internal PWM Dimming Ratio	R_IPW	/M	VDDB=24V	10	-	100	%	
External PWM	V EPWM	MAX	VDDB=24V	2	-	3.3	VDC	-
Control Voltage	V_EFVVIVI	MIN	VDDB=24V	0	-	0.8	VDC	-
External PWM Control Current	I_EPW	′M	VDDB=24V	-	-	2	mADC	-
External PWM Duty ratio	D_EPW	V M	VDDB=24V	10	-	100	%	3
External PWM Frequency	F_EPW	/M	VDDB=24V	140	180	240	Hz	-

Note 1 : Dimming ratio= 100% (MAX) (Ta=25 \pm 5 $^{\circ}$ C , Turn on for 45minutes)

Note 2 : Measurement condition Rising time = 20ms (VDDB : 10%~90%);

Note 3:


For External PWM application, \geq 5% dimming is function well and no backlight shutdown. For External PWM application, no backlight shutdown when 0% dimming hold time <10sec



3.7.2 Input Pin Assignment

Inverter Connector: CI0114M1HRL-NH (Cvilux)


Pin	Symbol	Description
1	VDDB	Operating Voltage Supply, +24V DC regulated
2	VDDB	Operating Voltage Supply, +24V DC regulated
3	VDDB	Operating Voltage Supply, +24V DC regulated
4	VDDB	Operating Voltage Supply, +24V DC regulated
5	VDDB	Operating Voltage Supply, +24V DC regulated
6	BLGND	Ground and Current Return
7	BLGND	Ground and Current Return
8	BLGND	Ground and Current Return
9	BLGND	Ground and Current Return
10	BLGND	Ground and Current Return
11	DET	BLU status detection: Normal : 0~0.8V ; Abnormal : Open collector
12	VBLON	BLU On-Off control: BL On: High/Open (3.3V~5.5V); BL off: Low (0~0.8V/GND)
13	VDIM	Internal PWM (0~3.3V for 10~100% Duty, open for 100%) < NC; at External PWM mode>
14	PDIM	External PWM (10%~100% Duty, open for 100%) < NC; at Internal PWM mode>

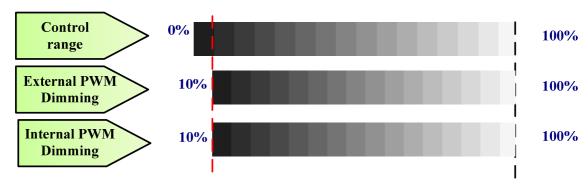


PWM Dimming: include Internal and External PWM Dimming



3.7.3 Power Sequence for Inverter

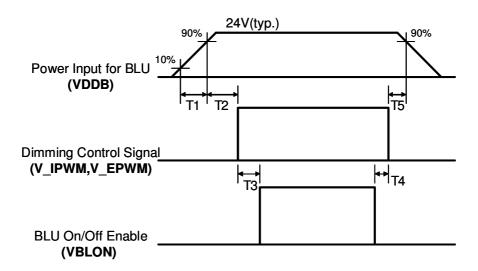

Dip condition for Inverter

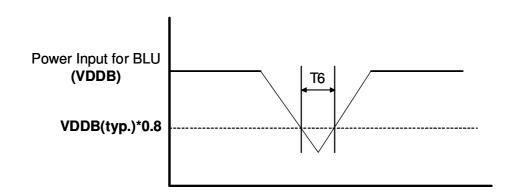


Davamatav		Value		Heita
Parameter	Min Typ		Max	Units
T1	20	-	-	ms
T2	500	-	-	ms
Т3	200	-	-	ms
T4	0	-	-	ms
T5	1	-	-	ms
T6	-	-	10	ms



4. Optical Specification

Optical characteristics are determined after the unit has been 'ON' and stable for approximately 45 minutes in a dark environment at 25 °C. The values specified are at an approximate distance 50cm from the LCD surface at a viewing angle of ϕ and θ equal to 0°.

Fig.1 presents additional information concerning the measurement equipment and method.

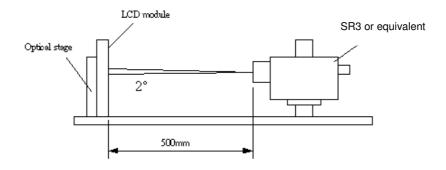

Parameter	Symbol Values				Unit	Notes	
Farameter	Syllibol	Min.	Тур.	Max	UTIIL	Notes	
Contrast Ratio	CR	4,000	5,000			1	
Surface Luminance (White)	L _{WH}	360	450		cd/m ²		
Luminance Variation	δ _{WHITE(9P)}			1.3	1.3		
Response Time (G to G)	Тү		6.5		Ms	4	
Color Gamut	NTSC		72		%		
Color Coordinates							
Red	R _X		0.64				
	R _Y		0.33				
Green	G _X		0.29				
	G _Y	Typ0.03	0.60	Typ.+0.03			
Blue	B _X	тур0.03	0.15	тур.+0.03			
	B _Y		0.06				
White	W _X		0.280				
	W_{Y}		0.290				
Viewing Angle						5	
x axis, right(φ=0°)	θ_{r}		89		degree		
x axis, left(φ=180°)	θι		89		degree		
y axis, up(φ=90°)	θ_{u}		89		degree		
y axis, down (φ=270°)	$\theta_{\sf d}$		89		degree		

Note:



1. Contrast Ratio (CR) is defined mathematically as:

Contrast Ratio=
$$\frac{\text{Surface Luminance of L}_{\text{on5}}}{\text{Surface Luminance of L}_{\text{off5}}}$$

- 2. Surface luminance is luminance value at point 5 across the LCD surface 50cm from the surface with all pixels displaying white. From more information see FIG 2. When lamp current $I_H = 11$ mA. L_{WH} =Lon5 where Lon5 is the luminance with all pixels displaying white at center 5 location.
- 3. The variation in surface luminance, δWHITE is defined (center of Screen) as:


 $\delta_{WHITE(9P)} = Maximum(L_{on1},\ L_{on2}, \ldots, L_{on9}) /\ Minimum(L_{on1},\ L_{on2}, \ldots L_{on9})$

4. Response time T_{γ} is the average time required for display transition by switching the input signal for five luminance ratio (0%,25%,50%,75%,100% brightness matrix) and is based on F_{ν} =60Hz to optimize.

Me	easured	Target							
Response Time		0%	25%	50%	75%	100%			
	0%		0% to 25%	0% to 50%	0% to 75%	0% to 100%			
	25%	25% to 0%		25% to 50%	25% to 75%	25% to 100%			
Start	50%	50% to 0%	50% to 25%		50% to 75%	50% to 100%			
	75%	75% to 0%	75% to 25%	75% to 50%		75% to 100%			
	100%	100% to 0%	100% to 25%	100% to 50%	100% to 75%				

5. Viewing angle is the angle at which the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface. For more information see FIG4.

FIG. 2 Luminance









FIG.3 Viewing Angle



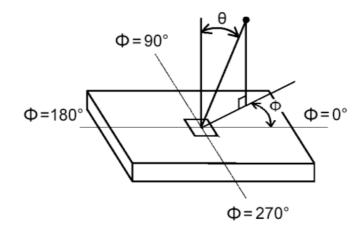


5. Mechanical Characteristics

The contents provide general mechanical characteristics for the model T315HW04 V0. In addition the figures in the next page are detailed mechanical drawing of the LCD.

	Horizontal	760.0mm				
O III o Bio o i	Vertical	450.0mm				
Outline Dimension	Depth	51.0mm (w/ inverter & shielding)				
De al Carrier	Horizontal	703.6mm				
Bezel Opening	Vertical	398.3mm				
Active Display Area	Horizontal	698.4 mm				
Active Display Area	Vertical	392.85 mm				
Weight	5,300 g	g (Тур.)				
Surface Treatment	AG, Haze=11%, 3H					




Front View

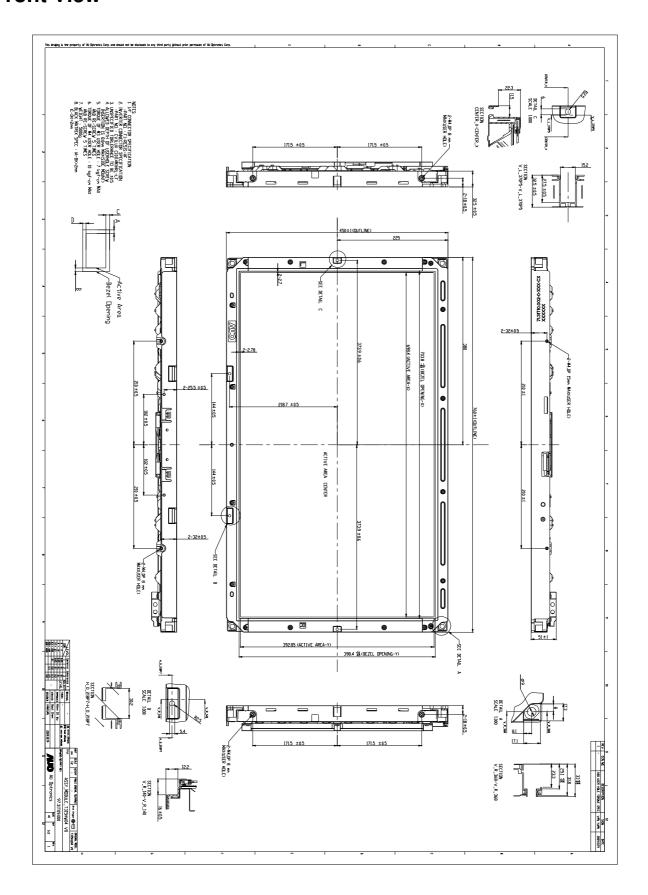



Back View

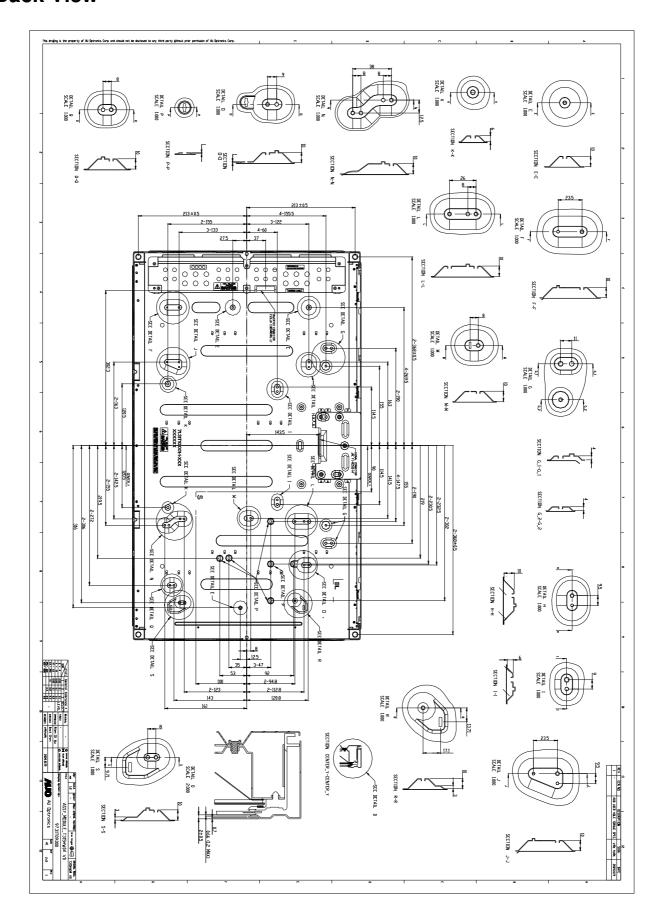



6. Reliability Test Items

	Test Item	Q'ty	Condition
1	High temperature storage test	3	60℃, 300hrs
2	Low temperature storage test	3	-20°C , 300hrs
3	High temperature operation test	3	50℃, 300hrs
4	Low temperature operation test	3	-5℃, 300hrs
			Wave form: random
			Vibration level: 1.5G RMS
5	Vibration test (non-operation)	3	Bandwidth: 10-300Hz,
			Duration: X, Y, Z 30min
			One time each direction
			Shock level: 50G
6	Shock test (non-operation)	3	Waveform: half since wave, 11ms
			Direction: ±X, ±Y, ±Z, One time each direction
7	Vibration test (With carton)	3	Random wave (1.5G RMS, 10-200Hz) 30mins/ Per each X,Y,Z axes
			Height: 38 cm
8	Drop test (With carton)	3	1 corner, 3 edges, 6 surfaces
			(ASTMD4169-I)



7. International Standard

7.1 Safety

- (1) UL 60950-1, UL 60065; Standard for Safety of Information Technology Equipment Including electrical Business Equipment.
- (2) IEC 60950-1: 2001, IEC 60065:2001; Standard for Safety of International Electrotechnical Commission
- (3) EN 60950 : 2001+A11, EN 60065:2002+A1:2006; European Committee for Electrotechnical Standardization (CENELEC), EUROPEAN STANDARD for Safety of Information Technology Equipment Including Electrical Business Equipment.

7.2 EMC

- (1) ANSI C63.4 "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electrical Equipment in the Range of 9kHz to 40GHz. "American National standards Institute(ANSI), 1992
- (2) C.I.S.P.R "Limits and Methods of Measurement of Radio Interface Characteristics of Information Technology Equipment." International Special committee on Radio Interference.
- (3) EN 55022 "Limits and Methods of Measurement of Radio Interface Characteristics of Information Technology Equipment." European Committee for Electrotechnical Standardization. (CENELEC), 1998




8. Packing

8-1 DEFINITION OF LABEL:

A. Panel Label:



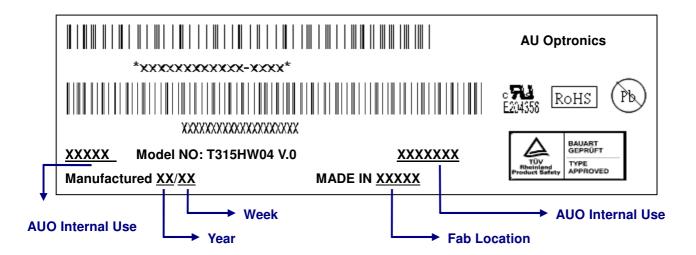


Green mark description

- (1) For Pb Free Product, AUO will add Pb for identification.
- (2) For RoHs compatible products, AUO will add RoHS for identification.

Note: The green Mark will be present only when the green documents have been ready by AUO internal green team. (definition of green design follows the AUO green design checklist.)

B. Carton Label:

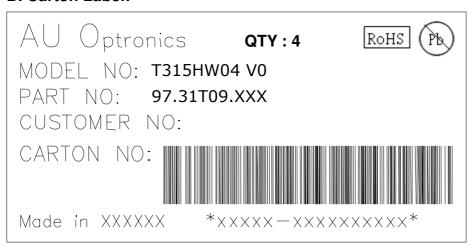






8-2 PACKING METHODS:


Carton: 832mm*283mm*545mm


4 pcs/carton Note: Rotation placement

















8-3 Pallet and Shipment Information

	Home		Packing			
	item	Item Quantity Dimension				
1	Packing BOX	4pcs/box	832(L)mm*283(W)mm*545(H)mm	24.1	Packing Box	
2	Pallet	13	Pallet			
3	Boxes per Pallet	8 boxes/Pa	allet			
4	Panels per Pallet	32pcs/pall	et			
5	Pallet after packing	N/A	1150(L)mm*840(W)mm*2460(H)mm	205.8	Pallet after packing	

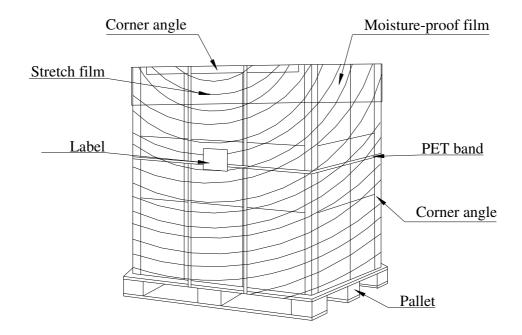



9. PRECAUTIONS

Please pay attention to the followings when you use this TFT LCD module.

9-1 MOUNTING PRECAUTIONS

- (1) You must mount a module using holes arranged in four corners or four sides.
- (2) You should consider the mounting structure so that uneven force (ex. twisted stress) is not applied to module. And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
- (3) Please attach the surface transparent protective plate to the surface in order to protect the polarizer. Transparent protective plate should have sufficient strength in order to the resist external force.
- (4) You should adopt radiation structure to satisfy the temperature specification.
- (5) Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter cause circuit broken by electro-chemical reaction.
- (6) Do not touch, push or rub the exposed polarizer with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment. Do not touch the surface of polarizer for bare hand or greasy cloth. (Some cosmetics are detrimental to the polarizer.)
- (7) When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with petroleum benzene. Normal-hexane is recommended for cleaning the adhesives used to attach front/ rear polarizer. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer.
- (8) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- (9) Do not open the case because inside circuits do not have sufficient strength.

9-2 OPERATING PRECAUTIONS

- (1) The device listed in the product specification sheets was designed and manufactured for TV application
- (2) The spike noise causes the mis-operation of circuits. It should be lower than following voltage: V=±200mV(Over and under shoot voltage)
- (3) Response time depends on the temperature. (In lower temperature, it becomes longer..)
- (4) Brightness of CCFL depends on the temperature. (In lower temperature, it becomes lower.) And in lower temperature, response time (required time that brightness is stable after turned on) becomes longer.
- (5) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- (6) When fixed patterns are displayed for a long time, remnant image is likely to occur.
- (7) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall



be done by system manufacturers. Grounding and shielding methods may be important to minimize the interface.

9-3 ELECTROSTATIC DISCHARGE CONTROL

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wristband etc. And don't touch interface pin directly.

9-4 PRECAUTIONS FOR STRONG LIGHT EXPOSURE

Strong light exposure causes degradation of polarizer and color filter.

9-5 STORAGE

When storing modules as spares for a long time, the following precautions are necessary.

- (1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.
- (2) The polarizer surface should not come in contact with any other object. It is recommended that they be stored in the container in which they were shipped.

9-6 HANDLING PRECAUTIONS FOR PROTECTION FILM

- (1) The protection film is attached to the bezel with a small masking tape. When the protection film is peeled off, static electricity is generated between the film and polarizer. This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc.
- (2) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the bezel after the protection film is peeled off.
- (3) You can remove the glue easily. When the glue remains on the bezel or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.



Appendix

EDID Setting

Item	Descript	ion											Value
Vendor code	Vendor Code 0 :- 1 : AU0												1
Panel Inch	Panel Inch, setting function: 21.6inch= 22 /									32			
H.Resolution	Panel Horizontal resolution information. 16bit: 0x02 = MS Byte, 0x03 = LS Byte (1) Horizontal resolution = 3840 (2) Horizontal resolution = 1920 (3) Horizontal resolution = 1366								1920				
V.Resolution	Panel Vertical Resolution information: 18bit: 0x04 = MS Byte, 0x05 = LS Byte (1) Vertical resolution = 2160 (2) Vertical resolution = 1080 (3) Vertical resolution = 768							1080					
V. Frequency	Panel Vertical frequency information. 0: 50Hz / 60Hz 1: 100Hz / 120Hz 2: 200Hz / 240Hz								0				
Data format	Panel LVDS Data format information. 0: 6bit								1				
Part Humber ^{*Note(1)}	Panel maker's version information. ② Example: T260XW05 V0 Item: (0), (1), (2), (3), (4), (5), (6), (7), (8), (9), (10), (11) "T", "2", "6", "0", "X", "W", "0", "5", "", "V", "0", "?" Ps: Item[11]: "?", default is "空格器". Setting value refer to "Note:(1)", and confirm with AUO: FAE and PM									Capitalization			



Appendix 2

i. EMI specification

Model name: T315HW04 V0

Item	Min	Тур	Max	Unit
EMI level (Note)			-6	dB(μ V/m)
SSCG		350		ps

Note:

□ · Criteria: CISPR22

Z Signal generator: PSG400 (Sony EMCS)

丙、EMI site: Sony EMCS Ichinomiya Tec. or using correlation value