

**DMV-5W SERIES, 5WATT, 4:1 INPUT RANGE**
**FEATURES:**

- ✓ 3 years warranty
- ✓ 1500Vdc isolation voltage
- ✓ Metal case with low ripple and noise
- ✓ Operating temperature range -40°C to +85°C
- ✓ Short circuit and input under voltage protection



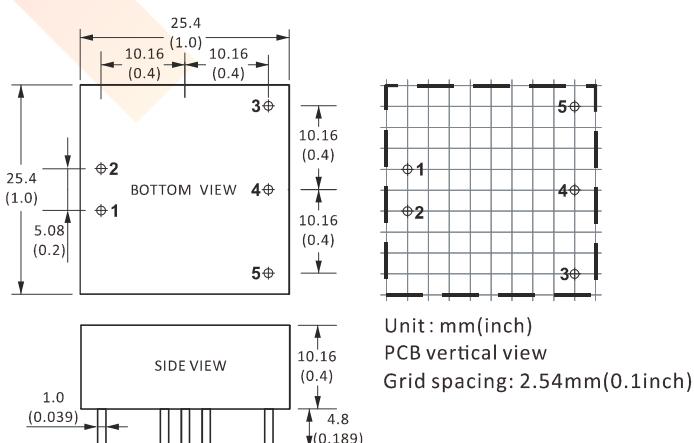
Model	Input voltage (Vdc)	Output voltage (Vdc)	Output current (mA)	Efficiency Typ.
<b>DMV5W-1811</b>		3.3	1000	82%
<b>DMV5W-1812</b>		5	1000	82%
<b>DMV5W-1813</b>		9	550	82%
<b>DMV5W-1814</b>		12	410	82%
<b>DMV5W-1815</b>		15	330	82%
<b>DMV5W-1816</b>	18(9~36)	24	210	82%
<b>DMV5W-1821</b>		±3.3	500	82%
<b>DMV5W-1822</b>		±5	500	82%
<b>DMV5W-1823</b>		±9	275	82%
<b>DMV5W-1824</b>		±12	205	82%
<b>DMV5W-1825</b>		±15	165	82%
<b>DMV5W-1826</b>		±24	100	82%
<b>DMV5W-3611</b>		3.3	1000	82%
<b>DMV5W-3612</b>		5	1000	82%
<b>DMV5W-3613</b>		9	550	82%
<b>DMV5W-3614</b>		12	410	82%
<b>DMV5W-3615</b>		15	330	82%
<b>DMV5W-3616</b>	36(18~72)	24	210	82%
<b>DMV5W-3621</b>		±3.3	500	82%
<b>DMV5W-3622</b>		±5	500	82%
<b>DMV5W-3623</b>		±9	275	82%
<b>DMV5W-3624</b>		±12	205	82%
<b>DMV5W-3625</b>		±15	165	82%
<b>DMV5W-3626</b>		±24	100	82%

Notes: other input and output models may available on request.

**DMV-5W SERIES, 5WATT, 4:1 INPUT RANGE**
**ELECTRICAL**

Output voltage accuracy	---	Vo1, Vo2 : $\pm 1.0\%$ , $\pm 3.0\%$
Line regulation	Nominal Load, full voltage	Vo1, Vo2 : $\pm 0.2\%$ , $\pm 1.5\%$
Load regulation	20% ~ 100% full load	Vo1, Vo2 : $\pm 0.5\%$ , $\pm 4.0\%$
Dynamic response (transient/recovery time)	5%-50%-75% load capability	$\Delta V_o / \Delta t$ : $\pm 4.0\% / 500\mu s$
Ripple and noise	20MHz BM, full load	Vo $\leq$ 5.0V, $\leq$ 50mVp-p Vo $\geq$ 48V, $\leq$ 180mVp-p Other, $\leq$ 100mVp-p
Operating frequency	Typical value	300KHz typ./330KHz max.
Turn-on delay time	Typical value	$\leq$ 200ms
Isolation voltage ( $<0.5\text{mA}/\text{min}$ )	Input to output Input to case	1500Vdc 500Vdc
Efficiency	Nominal input, full load	Vo $\leq$ 5.0V, 80% typ. Vo $>$ 5.0V, 82% typ.
Operating temperature range	---	-40°C to +85°C
Storage temperature range	---	-55°C to +120°C
Short circuit protection	---	Auto-recovery
Input under voltage protection	When input voltage is lower than the low terminal input voltage	Auto-recovery
Relative humidity	---	10%-90% max.
MTBF	Bellcore TR-332, 25°C	$2 \times 10^5$ Hrs

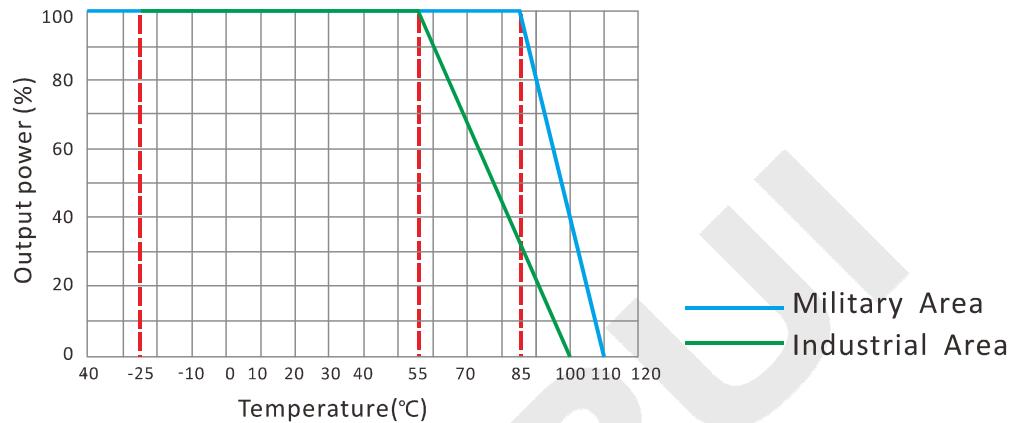
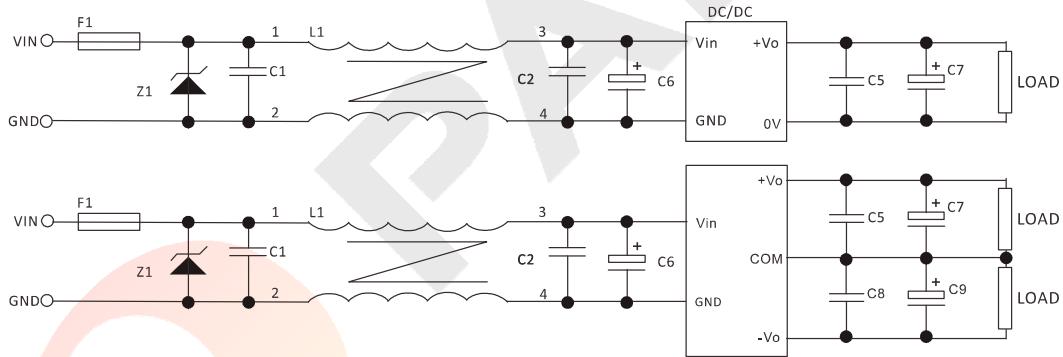
**Notes:** Unless otherwise specified, all the parameters of the test conditions are as follows: ambient temperature 25°C, the nominal input voltage, pure resistive nominal load.

**MECHANICAL**

**CONNECTION**

PIN #	SINGLE	DUAL
1	-Vin	-Vin
2	+Vin	+Vin
3	+Vo	+Vo1
4	No Pin	COM
5	GND	-Vo2

Note:

\* Unit is mm(inch).

**DMV-5W SERIES, 5WATT, 4:1 INPUT RANGE**
**TEMPERATURE PROFILE**

**NOTES**
**RECOMMENDED TEST AND APPLICATION CIRCUIT**


FUSE: depends on the actual input current;

TVS: depends on the actual input voltage;

Recommended capacitor: C1,C2,C5,C8, about 0.1uF; C6: 22uF-100uF; C7, C9: 10uF/10mA.