

Technical Data Sheet

1.4 mm Height Subminiature, Axial Flat Top View LED

28-21UYC/S530-XX/XXX

Features

- Package in 12mm tape on 7" diameter reels.
- Compatible with automatic placement equipment.
- EIA Std. package.
- Mono-color type.
- Pb-free
- The product itself will remain within RoHS compliant version.

Descriptions

- The28-21 SMD taping is much smaller than leaded components .Thus enable smaller board size. Higher packing density. Reduced storage space and finally smaller equipment to be obtained.
- Besides, light weight makes them ideal for miniature applications.
- Furthermore by automation assembly machines the accuracy is anticipated.

Applications

- Small indicator for indoor applications.
- Flat backlight for LCD, switches and symbols.
- Indicator and backlight in office equipment.
- Indicator and backlight for battery driven equipment.
- Indicator and backlight for audio and video equipment.
- Automotive : backlighting in dashboards and switches
- Telecommunication: indicator and backlighting in telephone and fax.

Device Selection Guide

	Lens Color	
Material	Material Emitted Color	
AlGaInP	Super Yellow	Water Clear


F8/TR8 28-21

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 1 of 9

Device No.: SZDLE-281-001 repared date:07-26-2005 Prepared by: Aihua hong

28-21UYC/S530-XX/XXX

Package Outline Dimensions

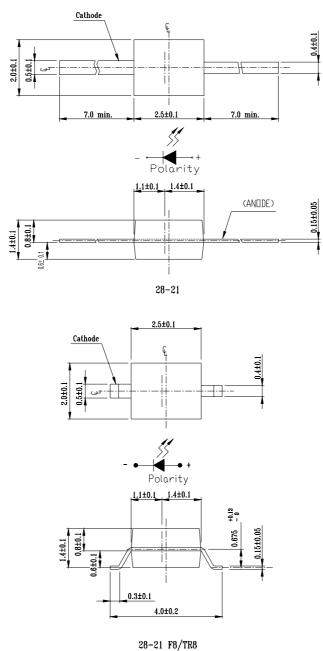

20 21 1

Note : Tolerances unless dimension ± 0.1

Angle ±5 Unit : mm

Note: Tolerances Unless Dimension is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. Device No.: SZDLE-281-001 http://www.everlight.com

repared date:07-26-2005

Rev. 2

Page: 2 of 9

Prepared by: Aihua hong



28-21UYC/S530-XX/XXX

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Reverse Voltage	V_R	5	V
Forward Current	I_{F}	25	mA
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\! \mathbb{C}$
Storage Temperature	Tstg	-40 ~ +100	$^{\circ}\!\mathbb{C}$
Soldering Temperature	Tsol	260 (for 5 second)	$^{\circ}\!\mathbb{C}$
Electrostatic Discharge	ESD	2000	V
Power Dissipation	P_{d}	60	mW
Peak Forward Current(Duty 1/10 @ 1KHz)	$ m I_{FP}$	60	mA

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Chip Rank	MIN.	TYP.	MAX.	Unit	Condition
Luminous Intensity	$ m I_{ m V}$	A2	12.0	30.0		mcd	I _F =20mA
		A3	21.0	33.0			
		A4	34.0	45.0			
		A5	42.0	61.0			
		A6	53.0	77.0			
		A7	66.0	91.0			
Viewing Angle	2 θ 1/2			150		deg	
Peak Wavelength	λp			591		nm	
Dominant Wavelength	λd			589		nm	
Spectrum Radiation Bandwidth	Δλ			15		nm	
Forward Voltage	$V_{\rm F}$			2.0	2.4	V	
Reverse Current	I_R				50	μ A	V _R =5V

*28-21UYC/S530-<u>XX</u> / <u>XXX</u>

1 2

1:Chip Rank

2:Packing Method:


(1) None,F8: Bulk(2) TR8: Taping


Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 3 of 9


Device No.: SZDLE-281-001 repared date:07-26-2005 Prepared by: Aihua hong


28-21UYC/S530-XX/XXX


Typical Electro-Optical Characteristics Curves

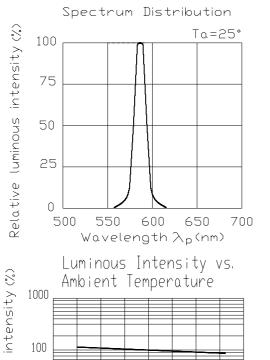















Rev. 2

Prepared by: Aihua hong

Page: 4 of 9

28-21UYC/S530-XX/XXX

Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank



Reel & Carrier Tape Dimensions

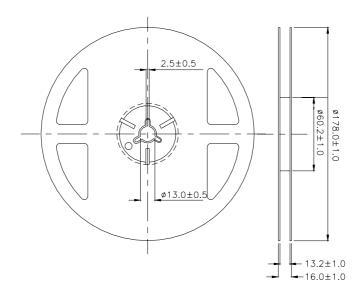


Everlight Electronics Co., Ltd. Device No. : SZDLE-281-001 http://www.everlight.com repared date:07-26-2005 Rev. 2

Page: 5 of 9


Prepared by: Aihua hong

28-21UYC/S530-XX/XXX

Loaded quantity per reel 1000 PCS/reel

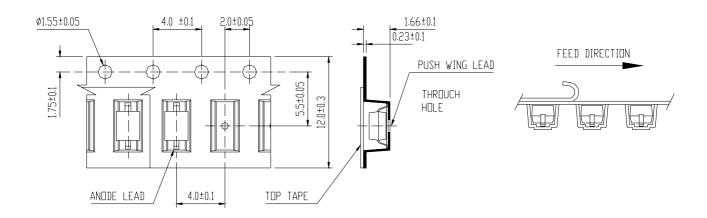

Moisture Resistant Packaging

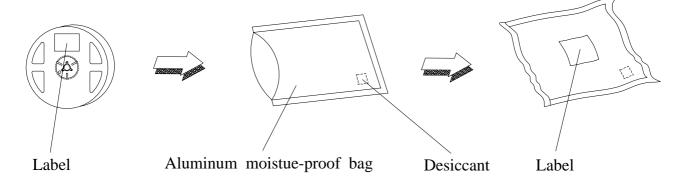

Note: Tolerances Unless Dimension is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. Device No. : SZDLE-281-001

http://www.everlight.com repared date:07-26-2005 Rev. 2 Page: 6 of 9

Prepared by: Aihua hong



28-21UYC/S530-XX/XXX

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level:

LTPD: 10 %

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5 sec.	6 Min.	22 Pcs.	0/1
2	Temperature Cycle	$H: +100^{\circ}C$ 15 min. $\int 5 \text{ min.}$ $L: -40^{\circ}C$ 15 min.	300 Cycles	22 Pcs.	0/1
3	Thermal Shock	H:+100°C 5 min. ∫ 10 sec. L:-10°C 5 min.	300 Cycles	22 Pcs.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 Pcs.	0/1
5	Low Temperature Storage	Temp. : -40°€	1000 Hrs.	22 Pcs.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 Pcs.	0/1
7	High Temperature / High Humidity	85°C / 85% RH	1000 Hrs.	22 Pcs.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 7 of 9

Device No.: SZDLE-281-001 repared date:07-26-2005 Prepared by: Aihua hong



28-21UYC/S530-XX/XXX

Precautions For Use


1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
 - 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
 - 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at 30°C or less and 70%RH or less..
- 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
 - 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : 60±5°C for 24 hours.

- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

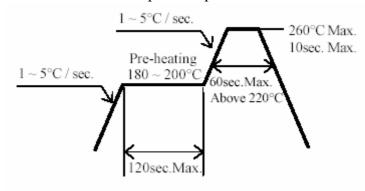

- 3.2 Reflow soldering should not be done more than two times
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.
- 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 280°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 8 of 9


Device No.: SZDLE-281-001 repared date:07-26-2005 Prepared by: Aihua hong



28-21UYC/S530-XX/XXX

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

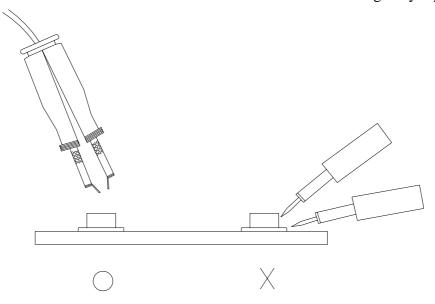

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936 Fax: 886-2267-6244, 2267-6189, 2267-6306 http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 9 of 9

Device No.: SZDLE-281-001 repared date:07-26-2005 Prepared by: Aihua hong