



## N Female Connector Clamp/Solder Attachment For RG14, RG217

### TECHNICAL DATA SHEET

PE4645

### N Female Connector Clamp/Solder Attachment For RG14, RG217

### Configuration

ConnectorN FemaleConnector SpecificationMIL-C-39012Connector Interface TypeRG14,RG217Cable Attachment Method (Shield/Contact)Clamp/SolderBody StyleStraight

### **Electrical Specifications**

Impedance, Ohms 50

### **Mechanical Specifications**

**Temperature** 

Operating Range, deg C -65 to +165

Size

 Length, in [mm]
 1.78 [45.21]

 Width/Dia., in [mm]
 0.875 [22.23]

 Weight, lbs [g]
 0.151 [68.49]

### Connector

Type N Female
Contact Material and Plating Silver
Contact Plating Specification QQ-S-365
Body Material and Plating Brass, Nickel
Dielectric Type Teflon

### Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant Yes

### **Plotted and Other Data**

Notes: Values at 25 °C, sea level

N Female Connector Clamp/Solder Attachment For RG14, RG217 from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Female Connector Clamp/Solder Attachment For RG14, RG217 PE4645

URL: http://www.pasternack.com/n-female-standard-rg14-rg217-connector-pe4645-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.




M	MATERIALS
BODY	BRASS NICKEL PLATED
CONTACT	SILVER PLATED
INSULATOR	PTFE

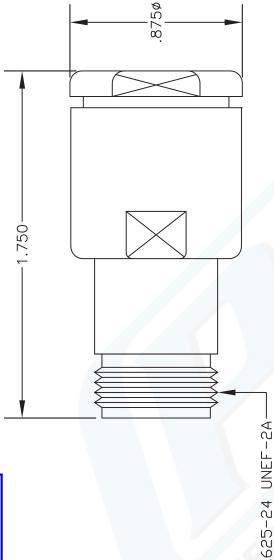


## ASSEMBLY PROCEDURES

1. SLIDE CLAMP NUT (1) & GASKET (2) OVER CABLE. STRIP CABLE AS SHOWN. DO NOT NICK BRAID WHILE CUTTING JACKET. TAPER END OF BRAID TO PERMIT ASSEMBLY OF BRAID CLAMP (3) SLIDE BRAID CLAMP(3) OVER BRAID & SEAT AGAINST CABLE.



2. FORM BRAID OVER CLAMP NUT (3). TRIM BRAID BACK TO SHOULDER. CUT DIELECTRIC TO DIMENSION SHOWN. DO NOT NICK CENTER CONDUCTOR. SOLDER CONTACT TO CENTER CONDUCTOR. REMOVE EXCESS SOLDER. DO NOT OVER HEAT DIELECTRIC. INSERT CABLE ASSEMBLY INTO BODY & TIGHTEN.



# PASTERNACK ENTERPRISES, INC.

P.O BOX 16759, IRVINE, CA 92623 PHONE (949) 261-1920 FAX (949) 261-7451

WEB ADDRESS: www.pasternack.com E-MAIL ADDRESS: sales@pasternack.com

## COAXIAL & FIBER OPTICS

**PASTERNACK ENTERPRISES®** ESTABLISHED 1972

N FEMALE, CLAMP ATTACHMENT FOR RG14 & RG217

127

SCALE N/A

042309

CAD FILE

SIZE A FSCM NO. 53919

PE4645

- 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. NOTES
- 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.