


Bandpass Filter

KR 1905A-1


Passband Amplitude

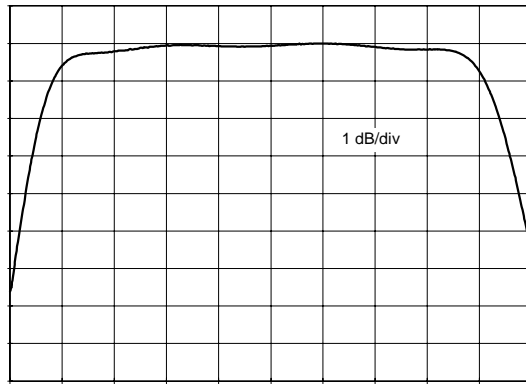

10.68 KHz

15.18 KHz

Overall Amplitude

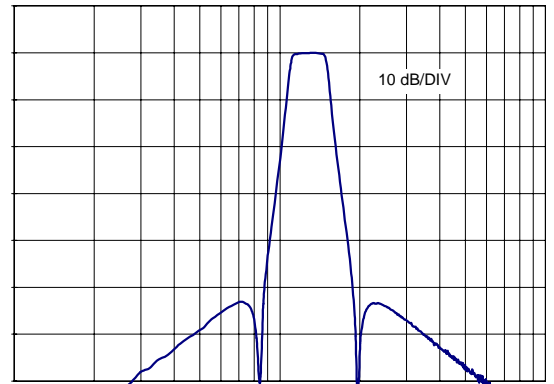


1 KHz

100 KHz

Specifications

KR Part Number	1905A-1
Filter Type	Bandpass
Insertion Loss	< 6.6 dB
Lower / Upper Passband Frequencies	11.314 KHz / 14.546 KHz
Passband Loss	< 1 dB
Lower / Upper Stopband Frequencies	6.93 KHz / 18.93 KHz
Stopband Attenuation	> 40 dB
Source Impedance	100 Ω
Load Impedance	1000 Ω

Outline Drawing

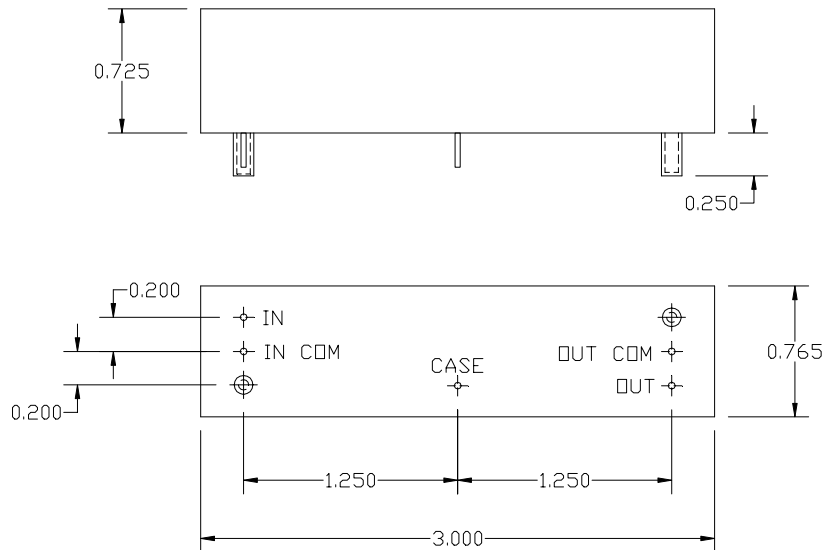

Terminals 0.03" diameter
Metal Case
Studs 4-40 UNC-2A (2 Plcs)

KR Electronics
www.krfilters.com
91 Avenel Street
Avenel, NJ 07001
732-636-1900