

# FDP083N15A\_F102

## N-Channel PowerTrench® MOSFET

150 V, 117 A, 8.3 mΩ

### Features



- $R_{DS(on)} = 6.85 \text{ m}\Omega$  (Typ.) @  $V_{GS} = 10 \text{ V}$ ,  $I_D = 75 \text{ A}$
- Fast Switching Speed
- Low Gate Charge,  $Q_G = 64.5 \text{ nC}$  (Typ.)
- High Performance Trench Technology for Extremely Low  $R_{DS(on)}$
- High Power and Current Handling Capability
- RoHS Compliant

### Description

This N-Channel MOSFET is produced using Fairchild Semiconductor's advanced PowerTrench® process that has been tailored to minimize the on-state resistance while maintaining superior switching performance.

### Applications

- Synchronous Rectification for ATX / Server / Telecom PSU
- Battery Protection Circuit
- Motor drives and Uninterruptible Power Supplies
- Micro Solar Inverter



### MOSFET Maximum Ratings $T_C = 25^\circ\text{C}$ unless otherwise noted

| Symbol         | Parameter  | FDP083N15A_F102  | Unit             |
|----------------|--|--|------------------|
| $V_{DSS}$      | Drain to Source Voltage  | 150  | V                |
| $V_{GSS}$      | Gate to Source Voltage   | $\pm 20$   | V                |
| $I_D$          | Drain Current  | -Continuous ( $T_C = 25^\circ\text{C}$ , Silicon Limited)  | 117              |
|                |  | -Continuous ( $T_C = 100^\circ\text{C}$ , Silicon Limited) | 83               |
| $I_{DM}$       | Drain Current  | - Pulsed (Note 1)  | 468              |
| $E_{AS}$       | Single Pulsed Avalanche Energy   | (Note 2)   | 542              |
| $dv/dt$        | Peak Diode Recovery $dv/dt$  | (Note 3)   | 6                |
| $P_D$          | Power Dissipation  | ( $T_C = 25^\circ\text{C}$ )                               | 294              |
|                |  | - Derate above $25^\circ\text{C}$                          | 1.96             |
| $T_J, T_{STG}$ | Operating and Storage Temperature Range                                      | -55 to +175  | $^\circ\text{C}$ |
| $T_L$          | Maximum Lead Temperature for Soldering Purpose, 1/8" from Case for 5 Seconds | 300  | $^\circ\text{C}$ |

\*Package limitation current is 120A.

### Thermal Characteristics

| Symbol          | Parameter                                     | FDP083N15A_F102 | Unit                      |
|-----------------|---|-----------------|---------------------------|
| $R_{\theta JC}$ | Thermal Resistance, Junction to Case, Max.    | 0.51            | $^\circ\text{C}/\text{W}$ |
| $R_{\theta JA}$ | Thermal Resistance, Junction to Ambient, Max. | 62.5            |                           |

## Package Marking and Ordering Information

| Device Marking | Device          | Package | Description         | Quantity |
|----------------|-----------------|---------|---------------------|----------|
| FDP083N15A     | FDP083N15A_F102 | TO-220  | F102: Trimmed Leads | 50       |

## Electrical Characteristics $T_C = 25^\circ\text{C}$ unless otherwise noted

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------|-----------|-----------------|------|------|------|------|
|--------|-----------|-----------------|------|------|------|------|

### Off Characteristics

|                                      |   |   |     |      |           |                           |
|--------------------------------------|---|---|-----|------|-----------|---------------------------|
| $BV_{DSS}$                           | Drain to Source Breakdown Voltage         | $I_D = 250\mu\text{A}, V_{GS} = 0\text{V}, T_C = 25^\circ\text{C}$                            | 150 | -    | -         | V                         |
| $\frac{\Delta BV_{DSS}}{\Delta T_J}$ | Breakdown Voltage Temperature Coefficient | $I_D = 250\mu\text{A}$ , Referenced to $25^\circ\text{C}$                                     | -   | 0.08 | -         | $\text{V}/^\circ\text{C}$ |
| $I_{DSS}$                            | Zero Gate Voltage Drain Current           | $V_{DS} = 120\text{V}, V_{GS} = 0\text{V}$<br>$V_{DS} = 120\text{V}, T_C = 150^\circ\text{C}$ | -   | -    | 1<br>500  | $\mu\text{A}$             |
| $I_{GSS}$                            | Gate to Body Leakage Current              | $V_{GS} = \pm 20\text{V}, V_{DS} = 0\text{V}$   | -   | -    | $\pm 100$ | nA                        |

### On Characteristics

|              |                                      |   |     |      |      |                  |
|--------------|--------------------------------------|---|-----|------|------|------------------|
| $V_{GS(th)}$ | Gate Threshold Voltage               | $V_{GS} = V_{DS}, I_D = 250\mu\text{A}$ | 2.0 | -    | 4.0  | V                |
| $R_{DS(on)}$ | Static Drain to Source On Resistance | $V_{GS} = 10\text{V}, I_D = 75\text{A}$ | -   | 6.85 | 8.30 | $\text{m}\Omega$ |
| $g_{FS}$     | Forward Transconductance             | $V_{DS} = 10\text{V}, I_D = 75\text{A}$ | -   | 139  | -    | S                |

### Dynamic Characteristics

|              |                                   |   |          |      |      |          |
|--------------|-----------------------------------|---|----------|------|------|----------|
| $C_{iss}$    | Input Capacitance                 | $V_{DS} = 25\text{V}, V_{GS} = 0\text{V}$<br>$f = 1\text{MHz}$    | -        | 4645 | 6040 | pF       |
| $C_{oss}$    | Output Capacitance                |   | -        | 1445 | 1880 | pF       |
| $C_{rss}$    | Reverse Transfer Capacitance      |   | -        | 100  | -    | pF       |
| $C_{iss}$    | Input Capacitance                 | $V_{DS} = 75\text{V}, V_{GS} = 0\text{V}$<br>$f = 1\text{MHz}$    | -        | 4570 | 6040 | pF       |
| $C_{oss}$    | Output Capacitance                |   | -        | 460  | 1880 | pF       |
| $C_{rss}$    | Reverse Transfer Capacitance      |   | -        | 20   | -    | pF       |
| $Q_{g(tot)}$ | Total Gate Charge at 10V          | $V_{DS} = 120\text{V}, I_D = 75\text{A}$<br>$V_{GS} = 10\text{V}$ | -        | 64.5 | 84   | nC       |
| $Q_{gs}$     | Gate to Source Gate Charge        |   | -        | 19.1 | -    | nC       |
| $Q_{gs2}$    | Gate Charge Threshold to Plateau  |   | -        | 8.7  | -    | nC       |
| $Q_{gd}$     | Gate to Drain "Miller" Charge     |   | (Note 4) | -    | 13.5 | -        |
| ESR          | Equivalent Series Resistance(G-S) | $f=1\text{MHz}$   | -        | 2.5  | -    | $\Omega$ |

### Switching Characteristics

|              |                     |   |          |    |     |    |
|--------------|---------------------|---|----------|----|-----|----|
| $t_{d(on)}$  | Turn-On Delay Time  | $V_{DD} = 75\text{V}, I_D = 75\text{A}$<br>$V_{GS} = 10\text{V}, R_{GEN} = 4.7\Omega$ | -        | 22 | 54  | ns |
| $t_r$        | Turn-On Rise Time   |   | -        | 58 | 126 | ns |
| $t_{d(off)}$ | Turn-Off Delay Time |   | -        | 61 | 132 | ns |
| $t_f$        | Turn-Off Fall Time  |   | (Note 4) | -  | 26  | 62 |

### Drain-Source Diode Characteristics

|          |  |   |   |     |      |    |
|----------|--|---|---|-----|------|----|
| $I_S$    | Maximum Continuous Drain to Source Diode Forward Current | -   | - | 117 | A    |    |
| $I_{SM}$ | Maximum Pulsed Drain to Source Diode Forward Current     | -   | - | 468 | A    |    |
| $V_{SD}$ | Drain to Source Diode Forward Voltage                    | $V_{GS} = 0\text{V}, I_{SD} = 75\text{A}$ | - | -   | 1.25 | V  |
| $t_{rr}$ | Reverse Recovery Time                                    | $V_{GS} = 0\text{V}, I_{SD} = 75\text{A}$ | - | 96  | -    | ns |
| $Q_{rr}$ | Reverse Recovery Charge                                  | $di_F/dt = 100\text{A}/\mu\text{s}$       | - | 268 | -    | nC |

#### Notes:

1. Repetitive Rating: Pulse width limited by maximum junction temperature
2. Starting  $T_J = 25^\circ\text{C}$ ,  $L = 3\text{mH}$ ,  $I_{SD} = 19\text{A}$
3.  $I_{SD} \leq 75\text{A}$ ,  $di/dt \leq 200\text{A}/\mu\text{s}$ ,  $V_{DD} \leq BV_{DSS}$ , Starting  $T_J = 25^\circ\text{C}$
4. Essentially Independent of Operating Temperature Typical Characteristics

## Typical Performance Characteristics

Figure 1. On-Region Characteristics

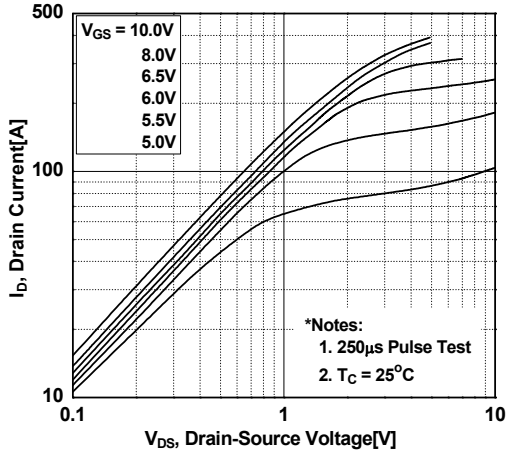


Figure 2. Transfer Characteristics

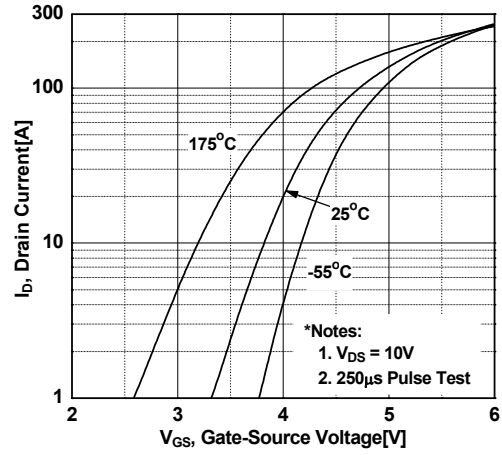


Figure 3. On-Resistance Variation vs. Drain Current and Gate Voltage

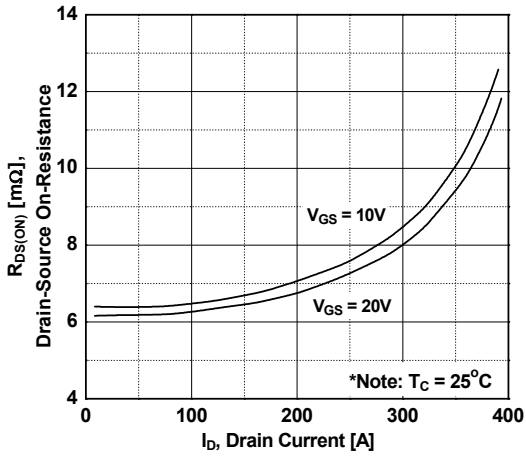


Figure 4. Body Diode Forward Voltage Variation vs. Source Current and Temperature

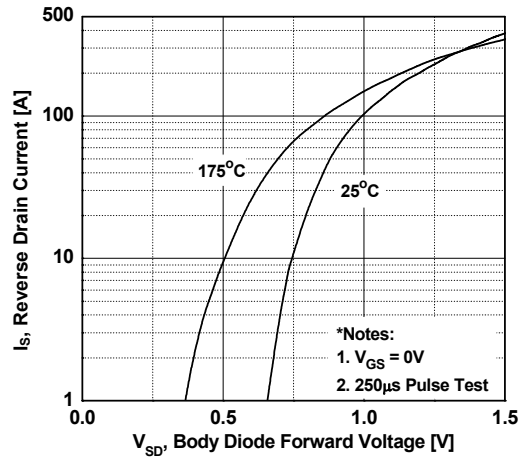


Figure 5. Capacitance Characteristics



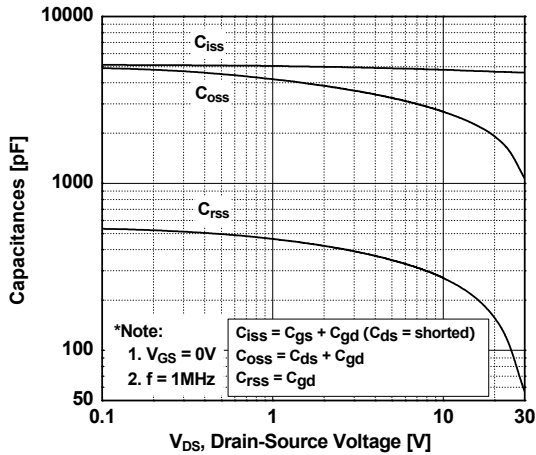


Figure 6. Gate Charge Characteristics

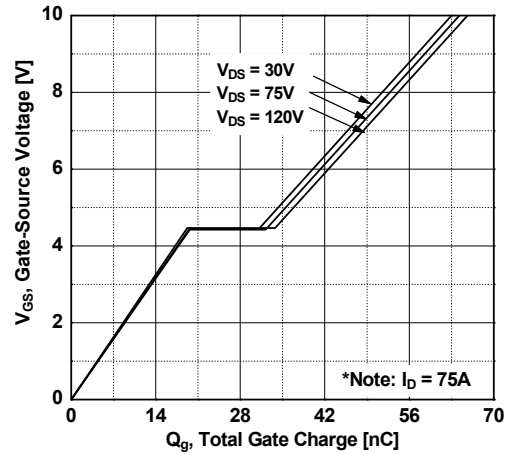


**Typical Performance Characteristics** (Continued)


**Figure 7. Breakdown Voltage Variation vs. Temperature**

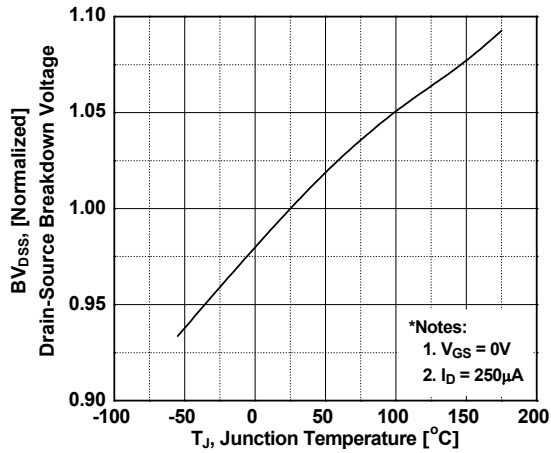


**Figure 8. On-Resistance Variation vs. Temperature**

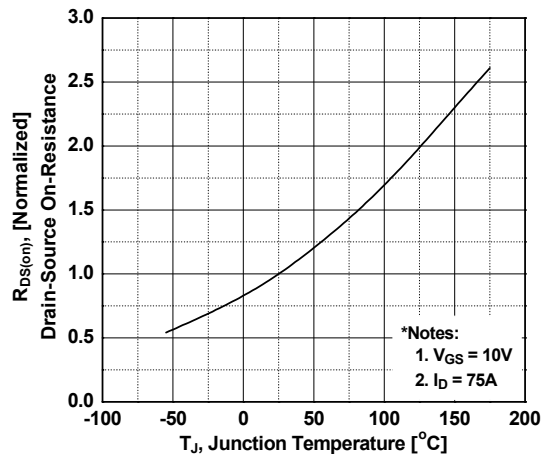


**Figure 9. Maximum Safe Operating Area**

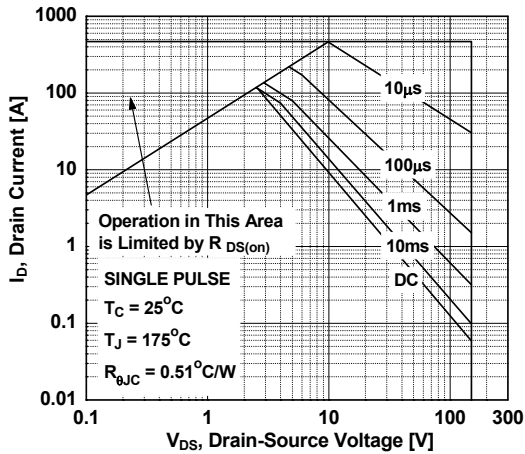

**Figure 10. Maximum Drain Current vs. Case Temperature**

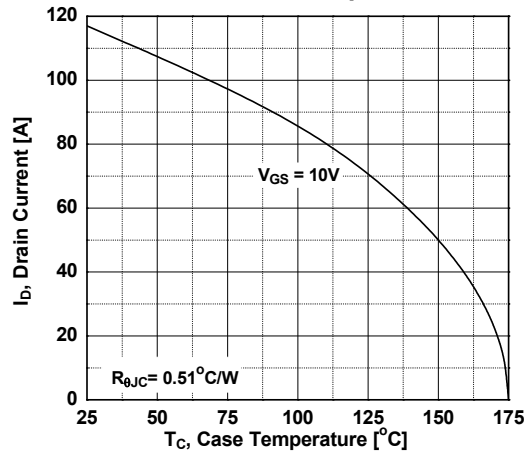


**Figure 11. Unclamped Inductive Switching Capability**


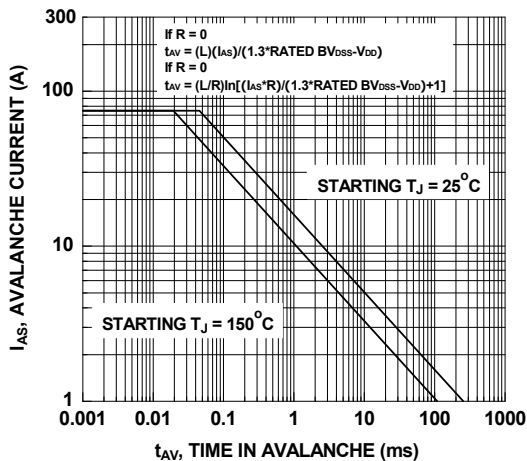


## Typical Performance Characteristics



Figure 12. Transient Thermal Response Curve

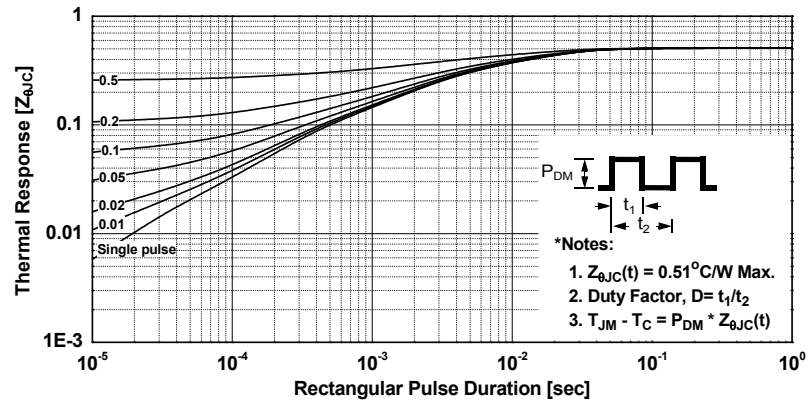



**Gate Charge Test Circuit & Waveform**

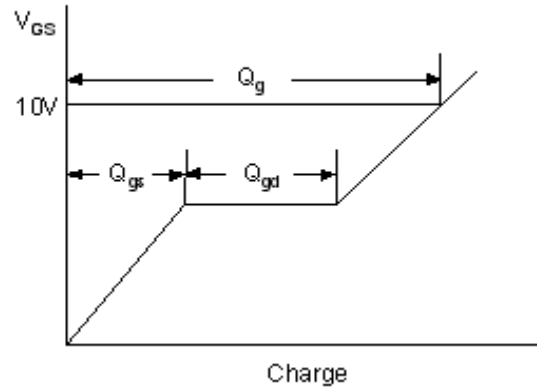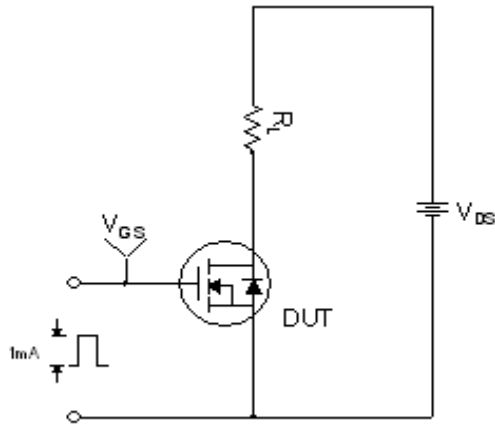



**Resistive Switching Test Circuit & Waveforms**

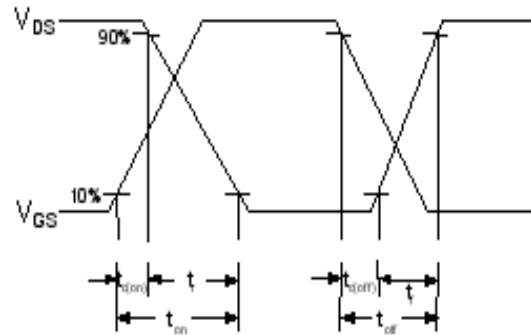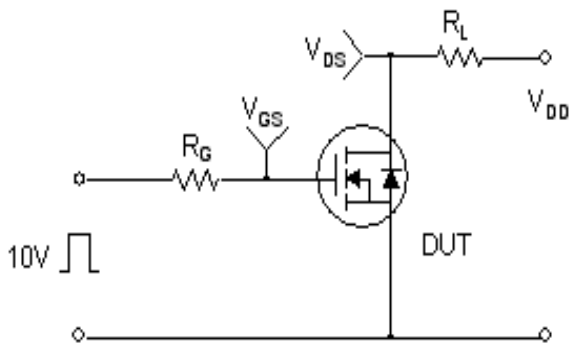

**Unclamped Inductive Switching Test Circuit & Waveforms**

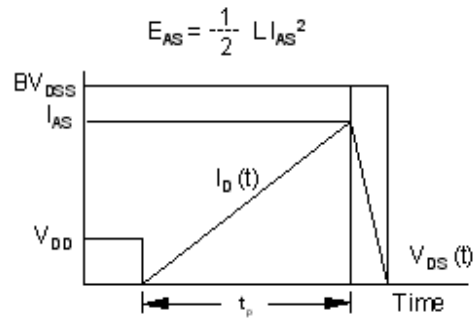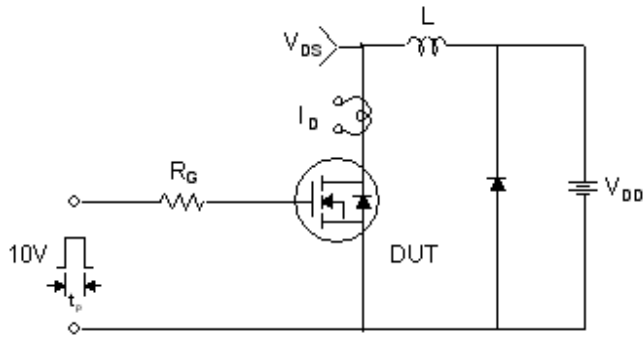


Peak Diode Recovery dv/dt Test Circuit & Waveforms

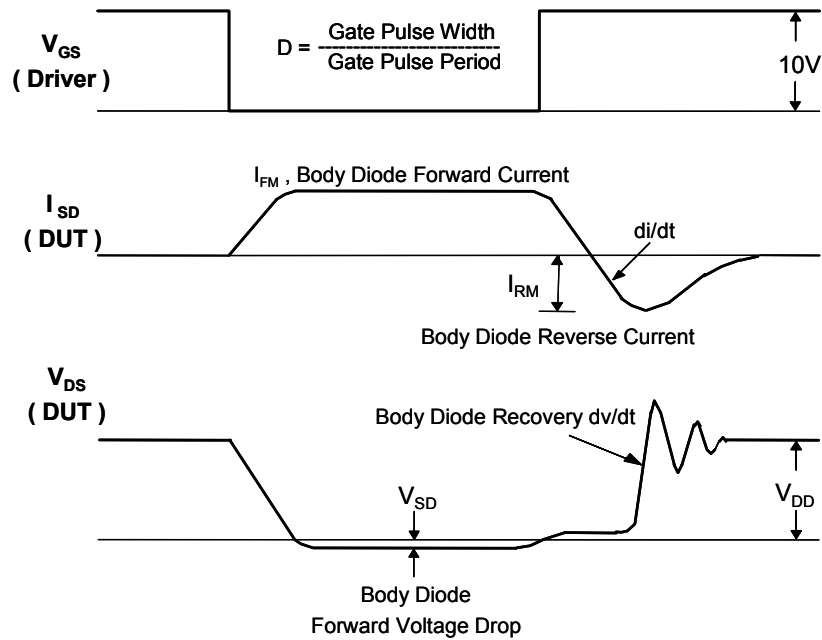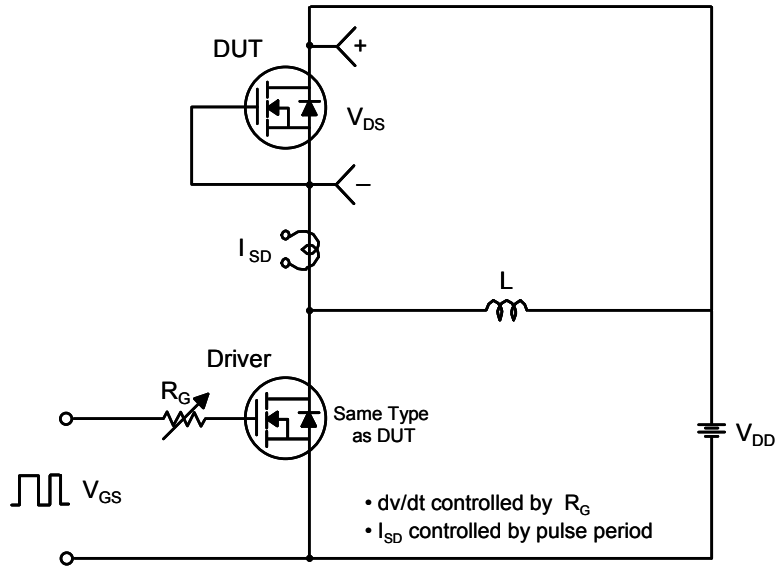

## Mechanical Dimensions

### TO-220 (F102: Trimmed Leads)

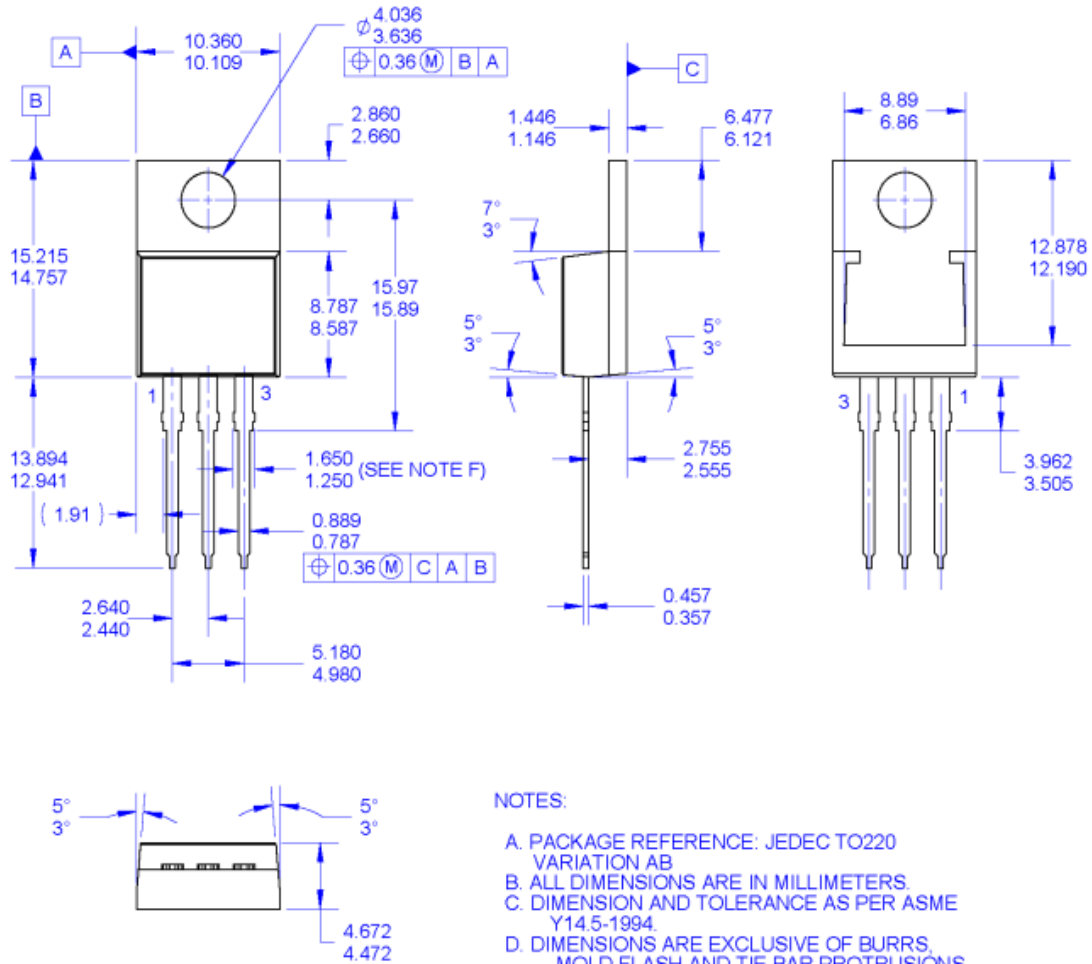

#### NOTES:

- A. PACKAGE REFERENCE: JEDEC TO220 VARIATION AB
- B. ALL DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSION AND TOLERANCE AS PER ASME Y14.5-1994.
- D. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH AND TIE BAR PROTRUSIONS.
- E. THIS PACKAGE IS FSZZ INTERNAL PRODUCTION AND INTENDED FOR DELTA CUSTOMER ONLY.
- F. MAX WIDTH FOR F102 DEVICE = 1.35mm.
- G. DRAWING FILE NAME: TO220T03REV2


Dimensions in Millimeters





**TRADEMARKS**

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

- |   |   |                                       |                  |
|---|---|---------------------------------------|------------------|
| 2Cool™  | FPS™  | PowerTrench®                          | Sync-Lock™       |
| AccuPower™  | F-PFS™  | PowerXS™                              | SYSTEM GENERAL®* |
| AX-CAP®*  | FRFET®  | Programmable Active Droop™            | TinyBoost™       |
| BitSiC™   | Global Power Resource <sup>SM</sup>             | QFET®                                 | TinyBuck™        |
| Build it Now™   | Green Bridge™                                   | QS™                                   | TinyCalc™        |
| CorePLUS™   | Green FPS™                                      | Quiet Series™                         | TinyLogic®       |
| CorePOWER™  | Green FPS™ e-Series™                            | RapidConfigure™                       | TINYOPTO™        |
| CROSSVOLT™  | Gmax™   | ™                                     | TinyPower™       |
| CTL™  | GTO™  | Saving our world, 1mW/W/kW at a time™ | TinyPWM™         |
| Current Transfer Logic™   | IntelliMAX™                                     | SignalWise™                           | TinyWire™        |
| DEUXPEED®   | ISOPLANAR™                                      | SmartMax™                             | TranSiC®         |
| Dual Cool™  | Marking Small Speakers Sound Louder and Better™ | SMART START™                          | TriFault Detect™ |
| EcoSPARK®   | MegaBuck™                                       | Solutions for Your Success™           | TRUECURRENT®*    |
| EfficientMax™   | MICROCOUPLER™                                   | SPM®                                  | µSerDes™         |
| ESBC™   | MicroFET™                                       | STEALTH™                              | µSerDes™         |
|  | MicroPak™                                       | SuperFET®                             | UHC®             |
| Fairchild®  | MicroPak2™                                      | SuperSOT™-3                           | Ultra FRFET™     |
| Fairchild Semiconductor®  | MillerDrive™                                    | SuperSOT™-6                           | UniFET™          |
| FACT Quiet Series™  | MotionMax™                                      | SuperSOT™-8                           | VCX™             |
| FACT®   | mWSaver™  | SupreMOS®                             | VisualMax™       |
| FAST®   | OptoHiT™  | SyncFET™                              | VoltagePlus™     |
| FastvCore™  | OPTOLOGIC®                                      |                                       | XS™              |
| FETBench™   | OPTOPLANAR®                                     |                                       |                  |

\*Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

**DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

**LIFE SUPPORT POLICY**

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used here in:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

**ANTI-COUNTERFEITING POLICY**

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, [www.fairchildsemi.com](http://www.fairchildsemi.com), under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufactures of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed application, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address and warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

**PRODUCT STATUS DEFINITIONS**

**Definition of Terms**

| Datasheet Identification | Product Status        | Definition  |
|--------------------------|-----------------------|---|
| Advance Information      | Formative / In Design | Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.   |
| Preliminary              | First Production      | Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design. |
| No Identification Needed | Full Production       | Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.   |
| Obsolete                 | Not In Production     | Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.  |

Rev. 164