



TR540 /S SERIES

Typical Applications : Household Appliances

- Vacuum Cleaner


Toy and Models

- Radio Control Model

/ Cordless Power Tools

- Air Compressor
- Drill & Screwdriver
- Cordless Garden Tool

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY				STALL	
	OPERATION RANGE	NORMAL	SPEED rpm	CURRENT A	SPEED rpm	CURRENT A	TORQUE		TORQUE	
							mN-m	g-cm	mN-m	g-cm
TR540-4070	4.5-12	6.0V CONSTANT	7500	0.50	6200	2.35	11.6	132	66.1	680
TR540-6530	3.0-6.0	3.6V CONSTANT	10100	1.20	8350	5.71	13.2	145	76.4	783
TR540S-27195	9.0-15	12V CONSTANT	3800	0.13	3160	0.64	14.6	150	87.1	890
TR540S-32105	4.5-9.0	6.0V CONSTANT	3440	0.25	2790	1.09	12.9	135	70.7	726
TR540S-5045	9.0-15	12V CONSTANT	17600	0.75	15200	4.75	23.7	258	187.8	1895
TR540S-7522	3.0-6.0	6.0V CONSTANT	17500	2.00	14500	9.71	23.5	246	142.6	1442

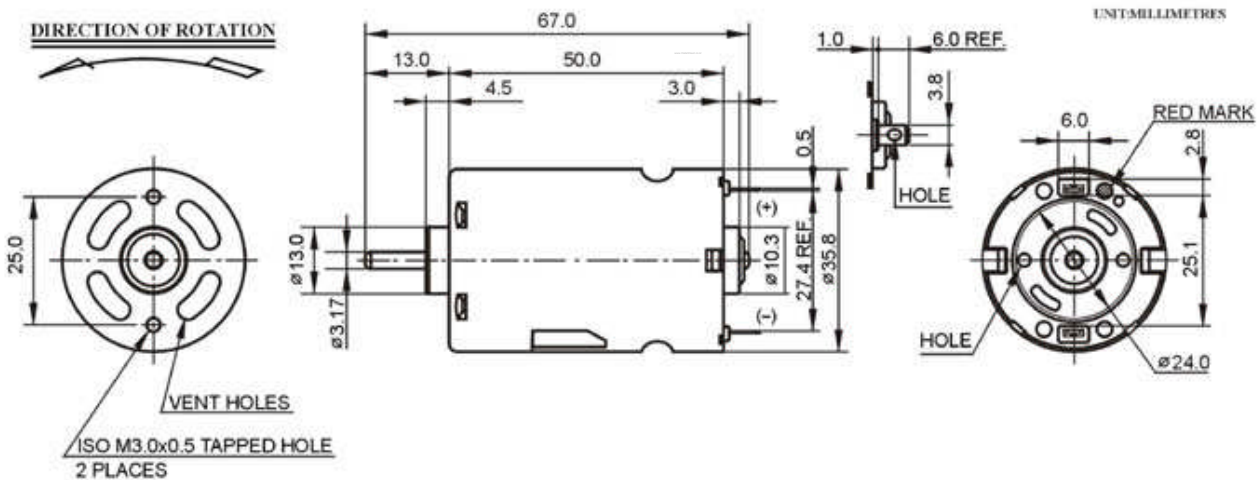

WEIGHT: 160g (APPROX)



TECO ELECTRIC CO., LTD.

Workshop K, 15/E, Shield Industrial Centre, 84-92 Chai Wan Kok Street, Tsuen Wan, N.T., Hong Kong.

Tel: (852) 2405 2428 / 2405 4428

Fax: (852) 2405 4928