



SM6002

Optically Coupled MOSFET Driver w/Discharge Circuit







Description


The SM6002 consists of an input drive LED optically coupled to a photodiode array output designed to drive highly capacitive loads, including the gate of a power MOSFET. The active discharge circuit of the PDA assures quick discharge of MOSFETs, providing fast turn-off times. This device can be used in a wide variety of applications for which high levels of input are required for a MOSFET output.

The SM6002 comes standard in a miniature 6 pin DIP package making it ideal for high-density board applications.

Applications

- Isolated means to drive discrete power MOSFETs
- **Lighting Controls**
- **Process Control Modules**
- Solid State Relays
- Solenoid Controls

Schematic Diagram

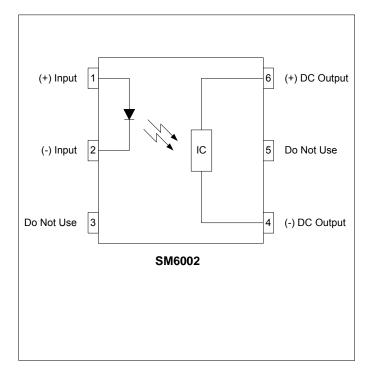

Features

- Compact 6 pin DIP/SMD package
- Built in active discharge circuit for fast turn-off
- Fast Turn-On
- 6V Gate Drive Voltage
- High Input-to-Output Isolation (up to 5kV_{RMS})
- Long Life / High Reliability
- RoHS / Pb-Free / REACH Compliant

Agency Approvals

UL/C-UL: File # E201932

VDE: File # 40035191 (EN 60747-5-2)

Absolute Maximum Ratings

The values indicated are absolute stress ratings. Functional operation of the device is not implied at these or any conditions in excess of those defined in electrical characteristics section of this document. Exposure to absolute Maximum Ratings may cause permanent damage to the device and may adversely affect reliability.

Storage Temperature	55 to +125°C
Operating Temperature	40 to +85°C
Continuous Input Current	50mA
Transient Input Current	400mA
Reverse Input Control Voltage	5V
Input Power Dissipation	40mW
Output Power Dissipation	400mW
Solder Temperature – Wave (10sec)	
Solder Temperature - IR Reflow (10sec)	260°C

Ordering Information

Part Number

	'
SM6002	6 pin DIP, (50/Tube)
SM6002-H	5kV _{RMS} Viso, 6 pin DIP, (50/Tube)
SM6002-S	6 pin SMD, (50/Tube)
SM6002-HS	5kV _{RMS} , 6 pin SMD, (50/Tube)
SM6002-STR	6 pin SMD, Tape and Reel (1000/Reel)
SM6002-HSTR	5kV _{RMS} , 6 pin SMD, Tape and Reel (1000/Reel)

Description

NOTE: Suffixes listed above are not included in marking on device for part number identification



Electrical Characteristics, T_A = 25°C (unless otherwise specified)

Parameter	Symbol	Min.	Тур.	Max.	Units	Test Conditions			
Input Specifications									
LED Forward Voltage	V _F	-	1.4	1.8	V	I _F = 10mA			
LED Reverse Voltage	BV _R	5	-	-	V	I _R = 10μA			
Reverse Leakage Current	I _{InRleak}	-	-	10	μА	V _R = 5V			
Turn-On Current	I _F	-	5	10	mA	V _{OUT} = 5V			
Turn-Off Current	I _{F(OFF)}	-	0.5	-	mA	V _{OUT} = 2V			
Output Specifications									
Open Circuit Voltage	V _{oc}	6	6.3	-	V	I _F = 10mA			
Short Circuit Voltage	I _{SC}	8	2	-	μА	I _F = 10mA			
Isolation Specifications									
Isolation Voltage		3750	-	-		DIL < 500/ 4-4 min			
(-H Option)	V _{ISO}	5000	-	-	V _{RMS}	RH ≤ 50%, t=1min			
Input-Output Resistance	R _{I-O}	-	10 ¹²	-	Ω	V _{I-O} = 500V _{DC}			



SM6002 Solder Temperature Profile Recommendations

(1) Infrared Reflow:

Refer to the following figure as an example of an optimal temperature profile for single occurrence infrared reflow. Soldering process should not exceed temperature or time limits expressed herein. Surface temperature of device package should not exceed 250°C:

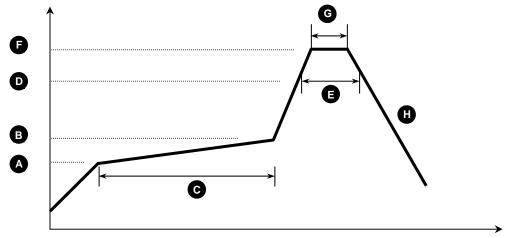


Figure 1

Process Step	Description	Parameter			
Α	Preheat Start Temperature (°C)	150°C			
В	Preheat Finish Temperature (°C)	180°C			
С	Preheat Time (s)	90 - 120s			
D	Melting Temperature (°C)	230°C			
E	Time above Melting Temperature (s)	30s			
F	Peak Temperature, at Terminal (°C)	260°C			
G Dwell Time at Peak Temperature (s)		10s			
Н	Cool-down (°C/s)	<6°C/s			

(2) Wave Solder:

Maximum Temperature: 260°C (at terminal)

Maximum Time: 10s

Pre-heating: 100 - 150°C (30 - 90s)

Single Occurrence

(3) Hand Solder:

Maximum Temperature: 350°C (at tip of soldering iron)

Maximum Time:

Single Occurrence


350°C (at tip of soldering iron)



SM6002 Package Dimensions

6 PIN DIP Package

Note: All dimensions in inches ["] with millimeters in parenthesis ()

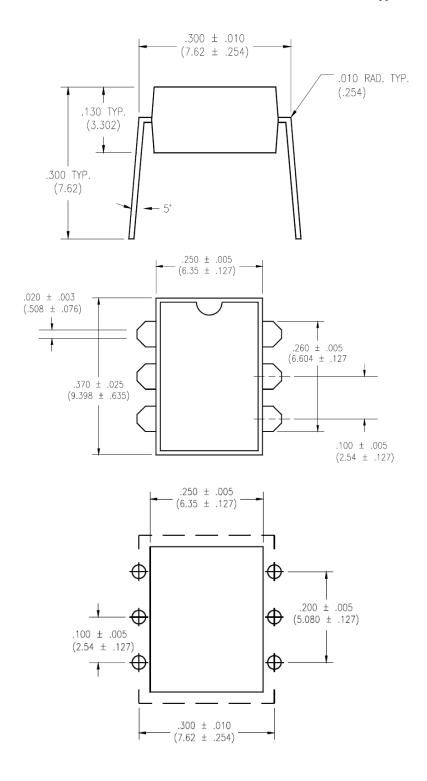






SM6002 Package Dimensions

6 PIN SMD Surface Mount Package (-S)

Note: All dimensions in inches ["] with millimeters in parenthesis ()

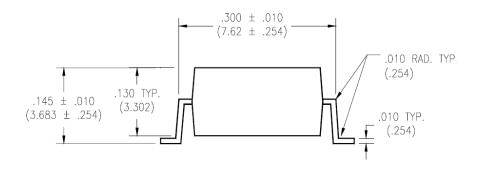

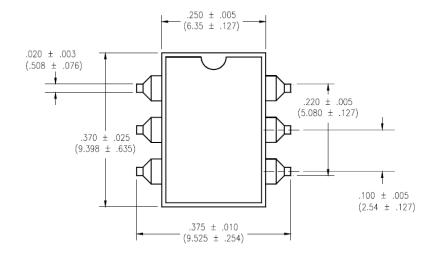


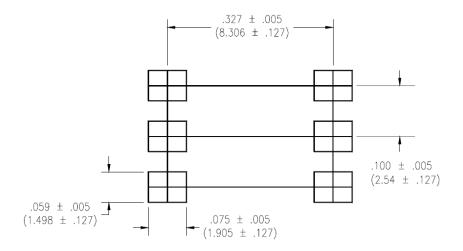





SM6002 Package Dimensions

6 PIN SMD Tape & Reel (-STR)



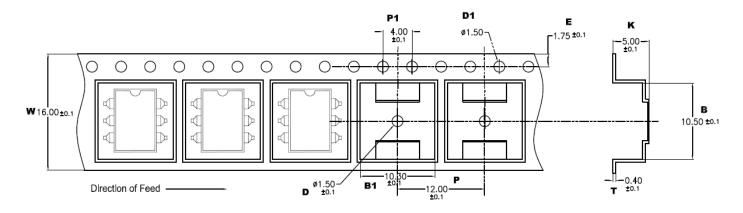


W	В	B1	P	P1	K	E	T	D	D1
16.00 ±0.1	10.50 ±0.1	10.30 ±0.1	12.00 ±0.1	4.00 ±0.1	5.00 ±0.1	1.75 ±0.1	0.40 ±0.1	1.50 ±0.1	1.50 ±0.1

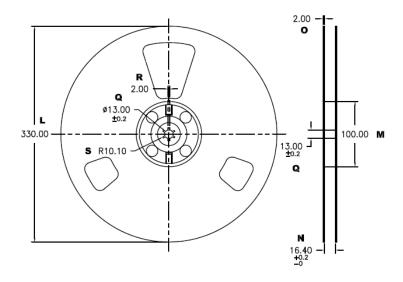

L	М	N	0	g	R	S
330.00	100.00	16.40 +0.2	2.00 ±0.1	13.00 ±0.2	2.00	10.00



SM6002 Package Marking

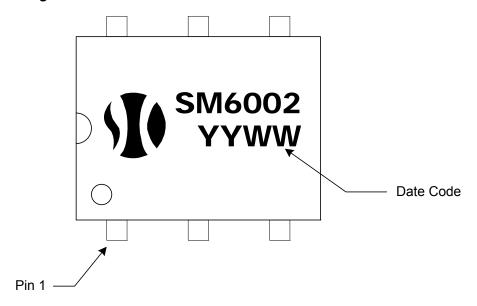

SM6002 Package Weights

Device	Single Unit	Full Tube (50pcs)	Full Pouch (10 tubes)	Full Reel (1000pcs)
SM6002(-H)	0.45	48	490	-
SM6002-(H)S	0.44	46	470	-
SM6002-(H)STR	0.44	-	-	884

Note: All weights above are in GRAMS, and include packaging materials where applicable

DISCLAIMER

Solid State Optronics (SSO) makes no warranties or representations with regards to the completeness and accuracy of this document. SSO reserves the right to make changes to product description, specifications at any time without further notices. SSO shall not assume any liability arising out of the application or use of any product or circuit described herein. Neither circuit patent licenses nor indemnity are expressed or implied.

Except as specified in SSO's Standard Terms & Conditions, SSO disclaims liability for consequential or other damage, and we make no other warranty, expressed or implied, including merchantability and fitness for particular use.

LIFE SUPPORT POLICY

SSO does not authorize use of its devices in life support applications wherein failure or malfunction of a device may lead to personal injury or death. Users of SSO devices in life support applications assume all risks of such use and agree to indemnify SSO against any and all damages resulting from such use. Life support devices are defined as devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when used properly in accordance with instructions for use can be reasonably expected to result in significant injury to the user, or (d) a critical component of a life support device or system whose failure can be reasonably expected to cause failure of the life support device or system, or to affect its safety or effectiveness.