UNISONIC TECHNOLOGIES CO., LTD

UH8102 cmos ic

LOW POWER HALL EFFECT SWITCH

■ DESCRIPTION

UH8102 is a low-power integrated Hall switch designed to sense the applied magnetic flux density and give a digital output, which indicates the present condition of the magnitude sensed.

It mainly designed for battery-powered system and hand-held equipment, such as cellular flip-phones and PDA's, in which power consumption is one major concern. The typical power consumption of UH8100 at down to 10uW in 2.7V supply.

For **UH8102A**, the output will be at the "Low" level when no magnetic field is applied. When the applied magnetic flux density is stronger than the switching threshold, the output would be at the "High" level.

For **UH8102B**, the output will be at the "High" level when no magnetic field is applied. When the applied magnetic flux density is stronger than the switching threshold, the output would be at the "Low" level.





- *Micropower Operation
- *2.4V to 5.5V Battery Operation
- *Offset Canceling Technology
- *Superior Temperature Stability
- *Extremely Low Switch-Point Drift

ORDERING INFORMATION

Ordering Number	Dookogo	Pin Assignment			Doolsing	
	Package	1	2	3	Packing	
UH8102XG-AE3-R	SOT-23	0		G	Tape Reel	
UH8102XG-G03-B	SIP-3	_	G	0	Tape Box	
UH8102XG-G03-K	SIP-3	I	G	0	Bulk	


Note: Pin Assignment: O: Output I: V_{DD} G: GND

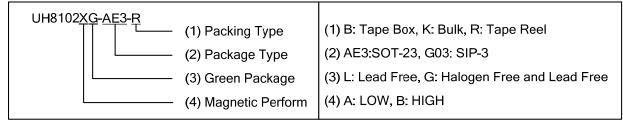




^{*}Insensitive to Physical Stress

■ MARKING



■ PIN CONFIGURATION




■ PIN DESCRIPTION

PIN NAME	PIN TYPE	PIN DESCRIPTION			
V _{OUT}	0	Digital Output			
V_{DD}	Р	Power Supply			
GND	G	Ground			

Note: O=Output, P=Power Supply, G=Ground

■ BLOCK DIAGRAM

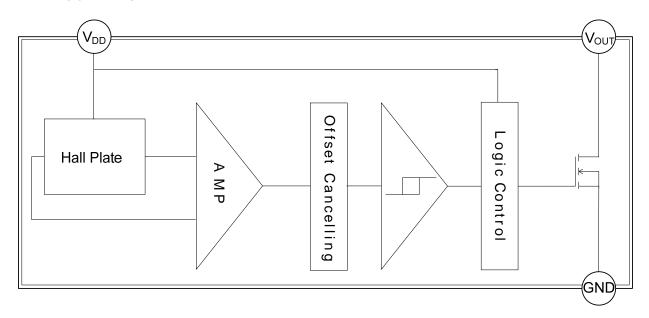

■ ABSOLUTE MAXIMUM RATING

PARAMETER		SYMBOL	RATINGS	UNIT	
Magnetic Flux Density		В	Unlimited	mT	
Supply Voltage		V_{DD}	5.5	V	
Supply current		ΙQ	-1 ~ + 2.5	mA	
Davis Diagination	SIP-3	1	400	mW	
Power Dissipation	SOT-23	P _D	200	mW	
Junction Temperature		TJ	150	°C	
Operation Temperature		T _{OPR}	-40 ~ +85	°C	
Storage Temperature		T _{STG}	-40 ~ + 150	°C	

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ RECOMMENDED OPERATING CONDITIONS (T_A=25°C)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	V_{DD}	Operating	2.4	2.7	5.5	V
Output Voltage	V _{OUT}		-0.3	2.7	5.5	V
Ambient Temperature	T _A		-40	25	85	°C

■ ELECTRICAL CHARACTERISTICS (T_A=25° C)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNIT
Output Saturation Voltage	V_{SAT}	V _{DD} =2.7V			0.1		V
Output Leakage Current	l _{OFF}	V _{DD} =2.7 V			0.01		uA
Supply Current	I _{DD(EN)}	\/ 2.7	Chip enable		1.1		mΑ
	I _{DD(DIS)}	V _{DD} =2.7 V	Chip disable		2.5		uA
	I _{DD(AVG)}		Average supply current		3	20	uA
Operating Time	T _{OP}				60		us
Standby Time	T_{SD}	V _{DD} =2.7V			150		ms
Duty Cycle	D.C.				0.04		%

■ MAGNETIC CHARACTERISTICS (T_A=25°C,V_{DD}=2.7V)

For UH8102A (**LOW** level when no magnetic field is applied)


Rank	PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
1	Operation Points	B _{OP}	South or North pole to branded side, B > B _{OP} , V _{OUT} On	8		23	
	Release Points	B _{RP}	South or North pole to branded side, B < B _{RP} , V _{OUT} Off	10		25	Gauss
	Hysteresis	$ B_{OP}-B_{RP} $	B _{OPX} -B _{RPX}		10		
	Operation Points	B _{OP}	South or North pole to branded side, B > B _{OP} , V _{OUT} On	15		35	
2	Release Points	B _{RP}	South or North pole to branded side, B < B_RP , V_OUT Off	20		40	Gauss
	Hysteresis	$ B_{OP}-B_{RP} $	B _{OPX} -B _{RPX}		10		
3	Operation Points	B _{OP}	South or North pole to branded side, B > B _{OP} , V _{OUT} On	1			
	Release Points	B _{RP}	South or North pole to branded side, $ B < B_{RP} $, V_{OUT} Off			70	Gauss
	Hysteresis	B _{OP} -B _{RP}	B _{OPX} -B _{RPX}		10		


■ MAGNETIC CHARACTERISTICS(Cont.)

For UH8102B (HIGH level when no magnetic field is applied)


			l ' '	N ALN I	TVD	B 4 A 3 /	
Rank	PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
	Operation Points	B _{OP}	South or North pole to branded side, B > B _{OP} , V _{OUT} On	10		25	
1	Release Points	B _{RP}	South or North pole to branded side, B < B_RP , V_OUT Off	8		23	Gauss
	Hysteresis	B _{OP} -B _{RP}	B _{OPX} -B _{RPX}		10		
2	Operation Points	B _{OP}	South or North pole to branded side, B > BOP , VOUT On	20		40	
	Release Points	B _{RP}	South or North pole to branded side, B < B _{RP} , V _{OUT} Off	15		35	Gauss
	Hysteresis	B _{OP} -B _{RP}	B _{OPX} -B _{RPX}		10		
3	Operation Points	B _{OP}	South or North pole to branded side, B > B _{OP} , V _{OUT} On			70	
	Release Points	B _{RP}	South or North pole to branded side, B < B _{RP} , V _{OUT} Off	1			Gauss
	Hysteresis	B _{OP} -B _{RP}	B _{OPX} -B _{RPX}		10		

■ TYPICAL APPLICATION CIRCUIT




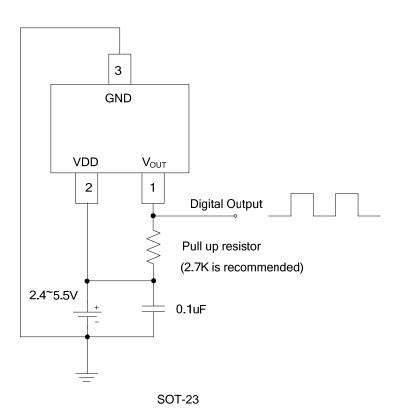

■ MAGNETIC FLUX

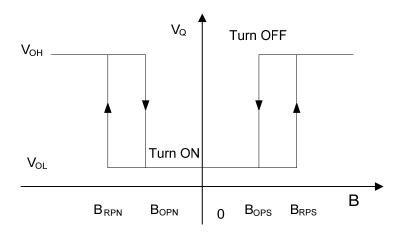

UH8102A (LOW level when no magnetic field is applied)

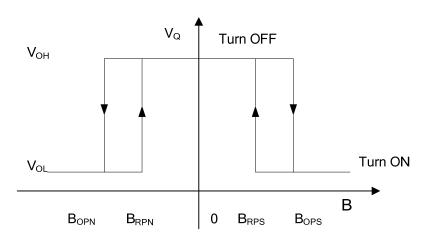

UH8102B (HIGH level when no magnetic field is applied)

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.