


**K66X Series High Density Right Angle PCB Mount**

**K66X Series Dimensions**

Pictured with Board Lock Option, Dimensions in mm

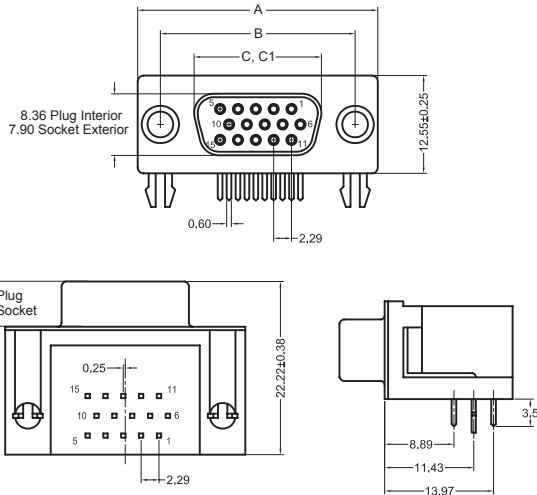

Shell Size	A		B		C		C1		D		E	
	In	mm	In	mm	In	mm	In	mm	In	mm	In	mm
15 (E)	±.015 ±0.38	±.015 ±0.38	±.005 ±0.13	±.005 ±0.13	±.010 ±0.25	±.010 ±0.25	±.010 ±0.25	±.010 ±0.25	±.005 ±0.13	±.005 ±0.13	±.005 ±0.13	±.005 ±0.13
26 (A)	1.213 30.81	.984 24.99	.643 16.33	.666 16.92	.090 2.29	.090 2.29	.090 2.29	.090 2.29	.010 0.25	.010 0.25	.010 0.25	.010 0.25
44 (B)	1.541 39.14	1.312 33.32	.971 24.66	.994 25.25	.090 2.29	.090 2.29	.090 2.29	.090 2.29	.020 0.51	.020 0.51	.020 0.51	.020 0.51
62 (C)	2.088 53.04	1.852 47.04	1.511 38.38	1.534 38.96	.090 2.29	.090 2.29	.090 2.29	.090 2.29	.028 0.51	.028 0.51	.028 0.51	.028 0.51
	2.729 69.32	2.500 63.50	2.159 54.84	2.182 55.42	.095 2.41	.095 2.41	.095 2.41	.095 2.41	.023 0.58	.023 0.58	.023 0.58	.023 0.58

C = Exterior of Female Shell (S) C1 = Interior of Male Shell (P)

**Electrical Characteristics**

**Rated Current:** 1.5A  
**Rated Voltage:** 29Vac


**D-SUBMINIATURE CONNECTORS**

**K66X Series**

**Documentation & Ordering Information**


**Kycon Part #**

**Part Number Builder**

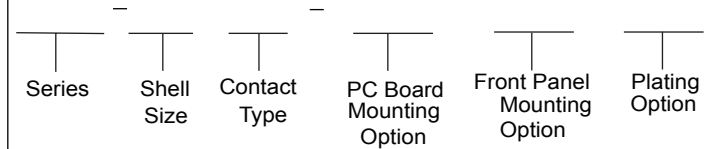

**Series**

K66X - High Density D-Subminiature Connector, Right Angle PCB Termination, .350" Footprint

**Shell Size-Contact Option**

- E - 15 Contacts
- A - 26 Contacts
- B - 44 Contacts
- C - 62 Contacts

**Contact Type**

- P - Pin Contact (Plug)
- S - Socket Contact (Receptacle)


**PC Board and Front Panel Mounting Option**

- N - (4-40)Riveted Threaded Insert
- NJ - (4-40)Riveted Threaded Insert with 4-40 Hex.Jack Screws

**N Option**



**J Option**



**Plating Option**

- Blank - Gold Flash
- 30 - 30µ" Gold

Contact Kycon for VESA and other options

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## [Kycon:](#)

[K66X-A26P-N](#) [K66X-E15S-N](#) [K66X-E15S-NJ30](#) [K66X-C62S-N](#) [K66X-C62P-N30](#) [K66X-C62S-NJ](#) [K66X-A26P-NJ](#)  
[K66X-C62P-NJ30](#) [K66X-A26P-N30](#) [K66X-A26S-NJ30](#) [K66X-B44P-NJ30](#) [K66X-E15S-N30-VESA](#) [K66X-B44S-NJ30](#)  
[K66X-B44S-N30](#) [K66X-B44P-N30](#) [K66X-E15P-N30](#) [K66X-E15P-NJ30](#) [K66X-A26S-N30](#) [K66X-C62S-N30](#) [K66X-](#)  
[A26P-NJ30](#) [K66X-A26S-NJ](#) [K66X-C62S-NJ30](#) [K66X-C62P-NJ](#) [K66X-B44P-NJ](#)