

Series AMER120-AZ

up to 5A | AC-DC / DC-DC | LED Driver / Converter



FEATURES:

- AC-DC Constant Current or Constant Voltage LED Driver
- Input range 90-305VAC/47-440Hz
- High Efficiency up to 88%
- Operating temperature -40 to 85°C
- Dimmable via resistive
- 5 Years Limited Warranty

- **Over Current Protection**
- **Short Circuit Protection**
- Waterproof Case rated IP68
- Power Factor Correction







Models Single output

| Madal | Max Output | Output Voltage | Output Current | Input | Input | Made of Operation | Efficiency (%) | | |
|--------------------|---------------|---------------------------|-------------------|---------------------|------------------|-------------------------------|-------------------|------------|------------|
| Model | Power (W)① | Range (V) ^③ | (A) ³ | Voltage (VAC/Hz) | Voltage (VDC) | • | | 230 VAC | 277 VAC |
| AMER120-50250AZ | 125 | 36-50 | 0-2.5 | 90-305/47-440 | 130-430 | Constant Current | 87 | 88 | 86 |
| AIVIER 120-30230AZ | 125 | 30-30 | 0-2.5 | 90-303/47-440 | | Constant Voltage ^② | 87 | 88 | 88 |
| AMER120-36340AZ | 122.4 | 24-36 | 0-3.4 | 90-305/47-440 | 130-430 | Constant Current | 87 | 88 | 88 |
| AIVIER 120-30340AZ | 122.4 | 24-30 | 0-3.4 | 90-305/47-440 | | Constant Voltage ^② | 87 | 88 | 88 |
| AMER120-24500AZ | 120 | 12-24 | 0-5 | 90-305/47-440 | 130-430 | Constant Current | 85 | 86 | 87 |
| AIVIER 120-24500AZ | 120 | 12-24 | 0-5 | 90-303/47-440 | | Constant Voltage ^② | 86 | 86 | 87 |
| Add Suffix "-F" | No dimm | ning option | | | | | | | |

① Exceeding the maximum output power will permanently damage the converter.

NOTE: Aimtec limited warranty of 5 years is valid based on product operation at datasheet specifications at ambient temperature of 25°C. humidity<75%, nominal input voltage (115/230/277VAC) and at rated output load unless otherwise specified. See http://www.aimtec.com/terms-sale

AMER120-AZ's AC/DC LED drivers have electrical safeguards designed within to protect it from conventional electrical abnormalities with the levels listed in the safety table. Applications for use within rural agricultural, heavy industrial, and other areas or regions which are prone to 'dirty' electrical conditions which would subject any of the above models to excessive voltages surges or spikes, may damage or cause early life failure of product. In this case consideration should be made by the end user to ensure that adequate line or mains surge suppression is installed in front of Aimtec device to ensure the longevity of the products. Failure to identify excessive line surges violations prior to installation may damage sensitive equipment permanently.

Input Specifications

| Parameters | Conditions | Typical | Maximum | Units |
|----------------------------------|----------------------------|---------|---------|-------|
| | 115 VAC | | 1800 | mA |
| Current (full load) | 230 VAC | | 800 | mA |
| | 277 VAC | | 700 | mA |
| | 115 VAC | | 45 | Α |
| Inrush current <2ms (cold start) | 230 VAC | | 60 | Α |
| | 277 VAC | | 70 | Α |
| Laskana sumant | I/O | | 0.25 | mA |
| Leakage current | I/FG, O/FG | | 3.5 | mA |
| | 115 VAC | 0.98 | | |
| Power factor | 230 VAC | 0.94 | | |
| | 277 VAC | 0.92 | | |
| External fuse | Recommended slow blow type | 3 | | Α |
| Start-up time | | 900 | | ms |

Tel: +1 514 620 2722 Toll free: + 1 888 9 AIMTEC www.aimtec.com (924 6832)

² The dimming feature is not supported when units are used in Constant Voltage mode only, Aimtec suggests to order "-F" No dimming option in the case.

³ In constant current mode output current is maximum shown, in constant voltage mode output voltage is the maximum shown. All models can be ordered with optional North American colour input wires (black (L), white (N), green (GND)). Add "-NA" to part number when orderina.



Output Specifications

| Parameters | Conditions | Typical | Maximum | Units |
|----------------------------|-----------------|---------|---------|--------|
| Current accuracy | | ±3 | | % |
| Line regulation | LL-HL | ±2 | | % |
| Load regulation | 0-100% load | ±3 | | % |
| Ripple & Noise 4 | 20MHz Bandwidth | 150 | | mV p-p |
| Hold-up time | | 80 | | ms |
| Current adjustment range 5 | | 100-10 | | % |

 $^{^{\}textcircled{9}}$ Ripple and Noise are measured at 20MHz bandwidth by using a 0.1 μ F (M/C) or (C/C) and 47 μ F (E/C) parallel capacitor.

Isolation Specifications

| Parameters | | Conditions | Typical | Rated | Units |
|----------------------|------|------------|---------|-------|-------|
| | I/O | 3sec | | 3750 | VAC |
| Tested voltage | I/FG | | | 2000 | VAC |
| | O/FG | | | 500 | VAC |
| Isolation resistance | | 500VDC | >1000 | | ΜΩ |

General Specifications

| Parameters | Conditions | Typical | Maximum | Units | |
|--------------------------|---|---|---------|-------|--|
| Switching frequency | | <u> </u> | 125 | KHz | |
| <u> </u> | AMER120-50250AZ | | 2.57 | | |
| Over current protection | AMER120-36340AZ | | 3.47 | Α | |
| · | AMER120-24500AZ | | 5.07 | | |
| Over voltage protection | Refer | Refer to Constant Current vs. Constant Voltage Mode curve | | | |
| Short circuit protection | Auto recovery | | | | |
| Operating temperature | With derating over 55°C | Refer to model application | | °С | |
| Maximum case temperature | | | 100 | °C | |
| Storage temperature | | -40 to +95 | | °C | |
| Temperature coefficient | | ±0.02 | | % /°C | |
| Cooling | Free air convection | | | | |
| Humidity | Non condensing | 20~95 | | % RH | |
| Case material | Aluminum | | | | |
| Potting | Epoxy (IP68 rated) | | | | |
| Wires | UL1015 18AWG Input & 14AWG output *20CM | | | | |
| Weight | 900 g | | | g | |
| Dimensions (L X H X W) | 181.00 x 59.00 x 47.00mm (7.13 x 2.32 x 1.85inches) | | | | |
| MTBF | >400,000 hrs (MIL-HDBK-217F at t=+25°C) | | | | |


Safety Specifications

| | arety openiouslene | | | | | |
|------------------|---|-------------------------------|--|--|--|--|
| Parameters | | | | | | |
| Agency approvals | cULus, CE | | | | | |
| | UL8750, UL60950-1, EN55022, class B, EN60529(IP68), EN61347-1, EN61347-2-13 | | | | | |
| | Information Technology Equipment | EN55022 Class B | | | | |
| | Harmonic Current Emissions | IEC/EN 61000-3-2, Class C | | | | |
| | Voltage fluctuations and flicker | IEC/EN 61000-3-3, (EN60555-3) | | | | |
| | Electrostatic Discharge Immunity | IEC 61000-4-2 Level 3 | | | | |
| Standards | RF, Electromagnetic Field Immunity | IEC 61000-4-3 Level 2 | | | | |
| | Electrical Fast Transient / Burst Immunity | IEC 61000-4-4 Level 2 | | | | |
| | Surge Immunity | IEC 61000-4-5 Level 3 | | | | |
| | RF, Conducted Disturbance Immunity | IEC 61000-4-6 Level 2 | | | | |
| | Power frequency Magnetic Field Immunity | IEC 61000-4-8 Level 1 | | | | |
| | Voltage dips, Short Interruptions Immunity | IEC 61000-4-11 | | | | |

⑤Note: from 0% to 10% dimming adjustment signal instability may be present.




Dimensions

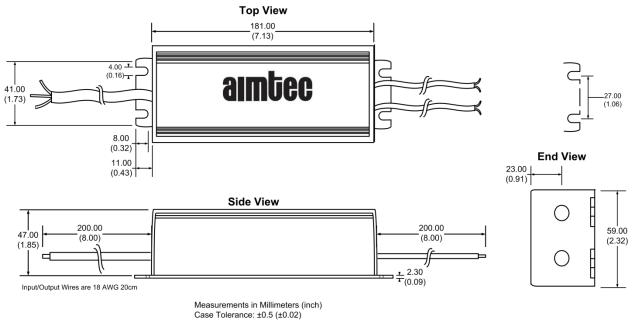

Wire connection:

| Wire | Connection |
|-----------------|--------------|
| Brown | AC L |
| Blue | AC N |
| Green | Ground |
| Red | +V output |
| Black | -V Output |
| Blue (Dimming) | + Vs dimming |
| White (Dimming) | -Vs dimming |


Analog (resistive) Dimming Application Circuit

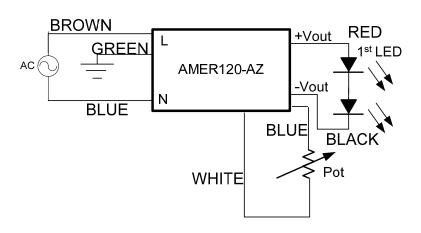


| Model Number | Maximum Pot Value (kΩ) |
|-----------------|---------------------------|
| AMER120-50250AZ | 18.22 |
| AMER120-36340AZ | 22.10 |
| AMER120-24500AZ | 34.31 |




Analog (0-10V) Dimming Application Circuit

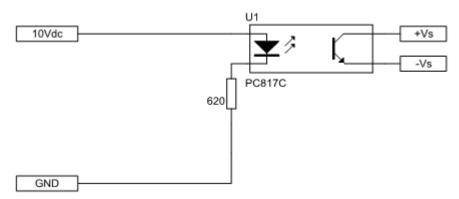

PWM (1KHz) Dimming Application Circuit

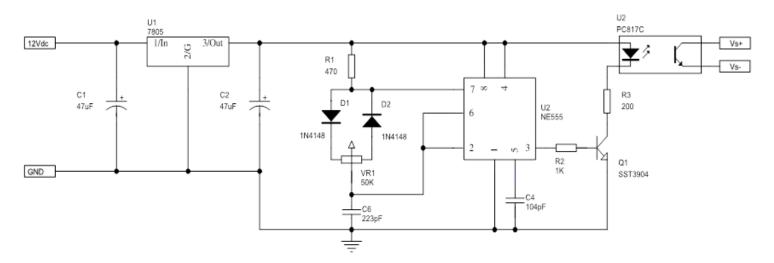


Derating

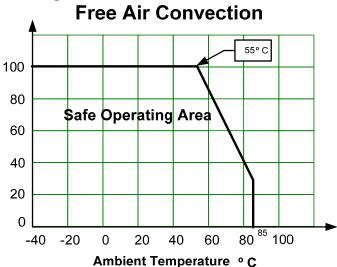




Efficiency vs. Input Voltage and Output Current (CC Load)

AMER120-50250AZ

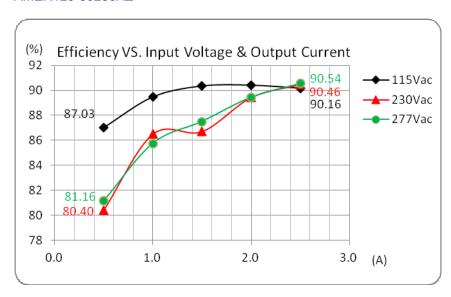

AMER120-36340AZ

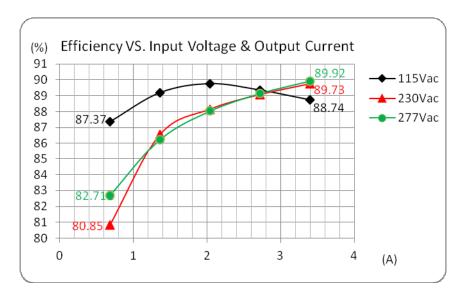


www.aimtec.com Tel: +1 514 620 2722 Toll free: + 1 888 9 AIMTEC (924 6832)

5 of 10




Efficiency vs. Input Voltage and Output Current (CC Load) Continued

AMER120-24500AZ

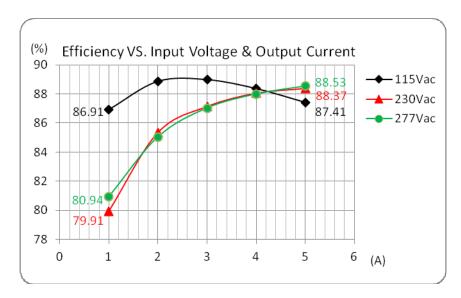


PFC Value vs. Output Load Current (CC Load)

AMER120-50250AZ

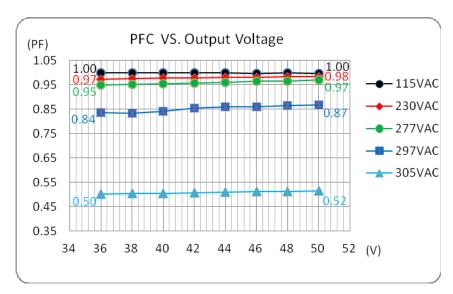


PFC Value vs. Output Load Current (CC Load) Continued

AMER120-36340AZ

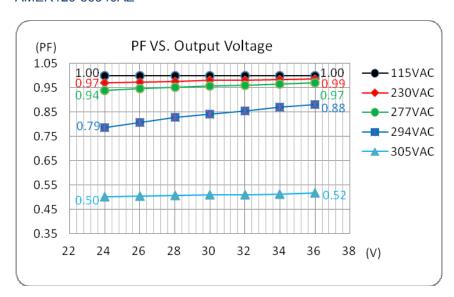

AMER120-24500AZ

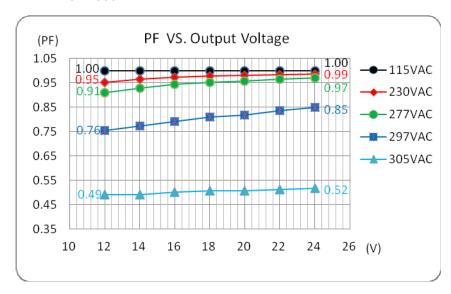


7 of 10




Constant Current Mode vs. Constant Voltage Mode

AMER120-50250AZ

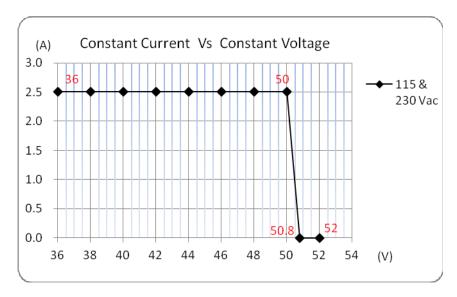

AMER120-36340AZ

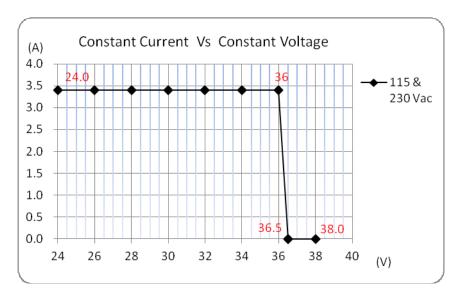


www.aimtec.com Tel: +1 514 620 2722 Toll free: + 1 888 9 AIMTEC (924 6832)

8 of 10


Constant Current Mode vs. Constant Voltage Mode Continued

AMER120-24500AZ

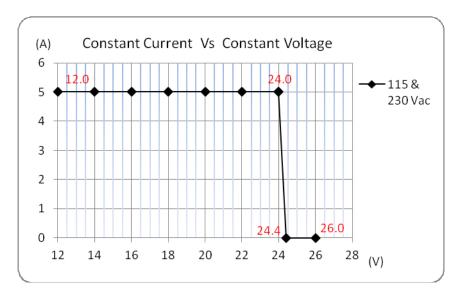


Output Current vs. Radj

AMER120-50250AZ

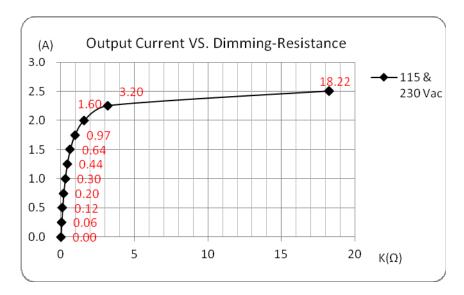


Output Current vs. Radj Continued

AMER120-36340AZ

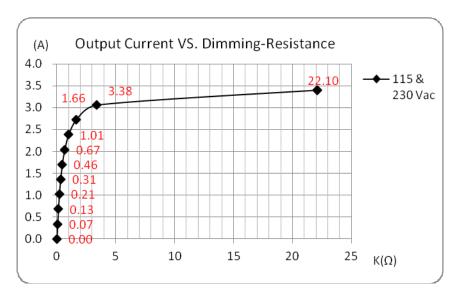

AMER120-24500AZ

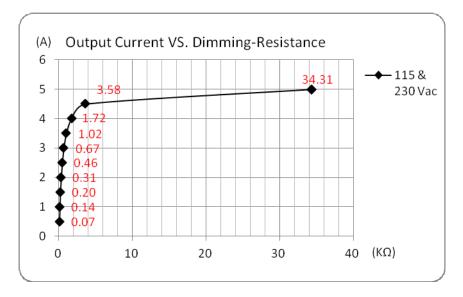

NOTE: 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to www.aimtec.com for the most current product specifications. **2.** Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. **3.** Mechanical drawings and specifications are for reference only. **4.** All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. **5.** Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. **6.** This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. **7.** Warranty is in accordance with Aimtec's standard Terms of Sale available at www.aimtec.com.