



DC COMPONENTS CO., LTD.

RECTIFIER SPECIALISTS

1N60P

TECHNICAL SPECIFICATIONS OF SMALL SIGNAL SCHOTTKY DIODES

FEATURES


- * Metal silicon junction, majority carrier conduction.
- * High current capability, low forward voltage drop.
- * Extremely low reverse current I_R
- * Ultra speed switching characteristics
- * Small temperature coefficient of forward characteristics
- * Satisfactory Wave detection efficiency
- * For use in RECORDER, TV, RADIO, TELEPHONE as detectors, super high speed switching circuits, small current rectifier

MECHANICAL DATA

- * Case: DO-35 glass case
- * Polarity: color band denotes cathode end
- * Weight: 0.13 grams approx.

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

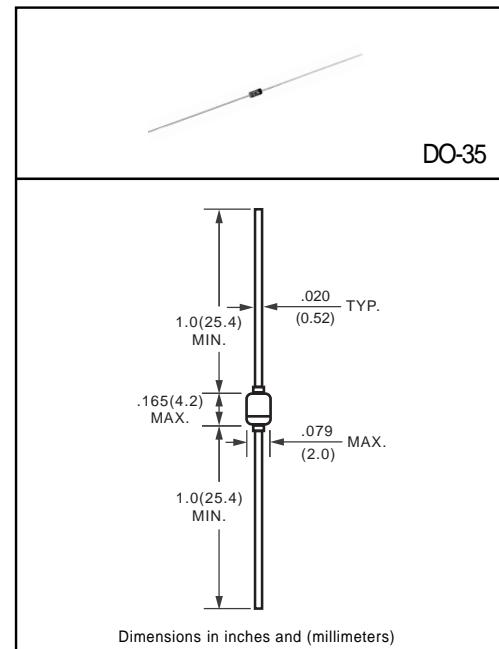

Dimensions in inches and (millimeters)

ABSOLUTE RATINGS(LIMITING VALUES)

PARAMETERS		SYMBOL	VALUE		UNITS
ZeneRepetitive Peak Reverse Voltage		V_{RRM}	45		Volts
Forward Continuous Current	$T_A=25^\circ C$	I_F	50		mA
Peak Forward Surge Current($t=1S$)		I_{FSM}	500		mA
Storage and junction Temperature Range		T_{STG}/T_J	-65 to +125		°C
Maximum Lead Temperature for Soldering during 10S at 4mm from Case		T_L	230		°C

ELECTRICAL CHARACTERISTICS

PARAMETERS	TEST CONDITIONS	SYMBOL	VALUE		UNITS
			TYP.	MAX.	
Forward Voltage	$I=1\text{mA}$	V_F	0.24	0.5	Volts
	$I=200\text{mA}$		0.65	1.0	
Reverse Current	$V_R=15\text{V}$	I_R	0.5	1.0	μA
Junction Capacitance	$V_R=10\text{V}$ $f=1\text{MHz}$	C_J	6.0		pF
Detection Efficiency	$V_I=3\text{V}$ $f=30\text{MHz}$ $C_L=10\text{pF}$ $R_L=3.8\text{k}\Omega$	η	60		%
Reverse Recovery time	$I_F=I_R=1\text{mA}$ $I_{rr}=1\text{mA}$ $R_C=100\Omega$	t_{rr}		1	ns
Junction Ambient Thermal Resistance		R_{QJA}	400		°C/W

FIG.1-FORWARD CURRENT

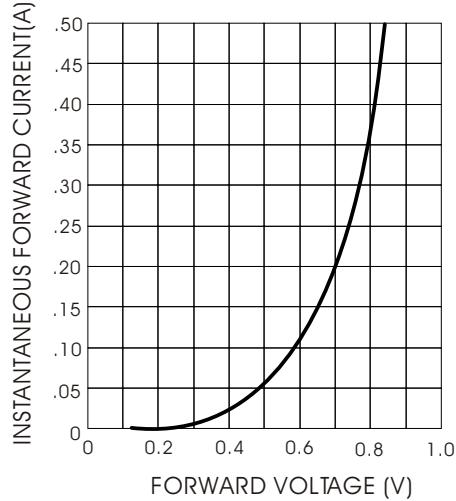


FIG.2-REVERSE CURRENT

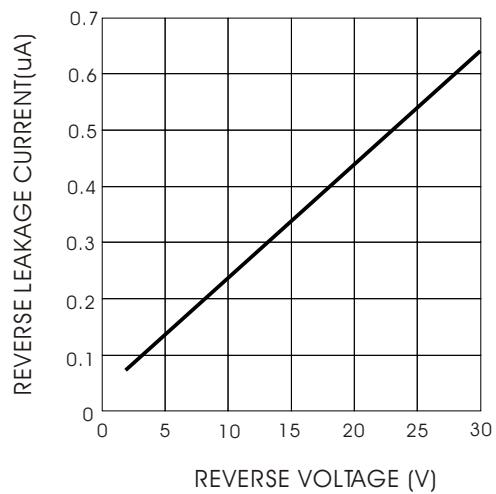


FIG.3-JUNCTION CAPACITANCE

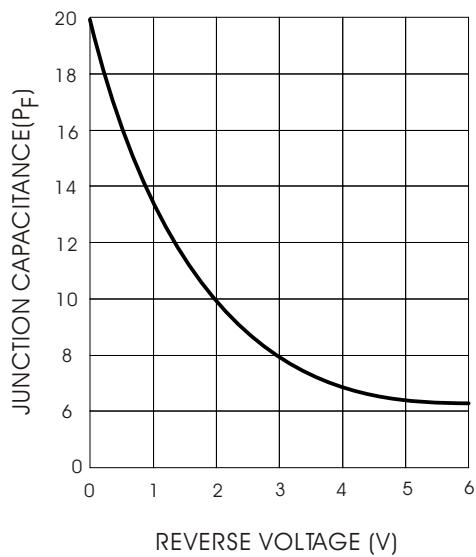


FIG.4-DETECTION EFFICIENCY MEASUREMENT CIRCUIT

