Version: January 12, 2017



(TCS) Chip Current Sensing Precision Resistor

Web: www.token.com.tw

Email: rfq@token.com.tw

Token Electronics Industry Co., Ltd.

Taiwan: No.137, Sec. 1, Zhongxing Rd., Wugu District,

New Taipei City, Taiwan, R.O.C. 24872 Tel: +886 2981 0109 Fax: +886 2988 7487

China: 12F, Zhong Xing Industry Bld., Chuang Ye Road,

Nan Shan District, Shen Zhen City,

Guang Dong, China 518054

Tel: +86 755 26055363; Fax: +86 755 26055365



Product Introduction

Token's TCS (thin film current sensing chip resistor) makes sense of current.

Features:

- Thin Film Process.
- Resistance Values from $50m\Omega$ to 1Ω .
- Very Tight Tolerance from $\pm 1\%$ to $\pm 0.5\%$.
- Extremely Low TCR from $\pm 200 \text{ PPM/}^{\circ}\text{C}$ to $\pm 50 \text{PPM/}^{\circ}\text{C}$.
- High Purity Alumina Substrate for High Power Dissipation.
- RoHS Requirments with Pb-free Terminations.

Applications:

- Voltage Regulation Module (VRM),
- Portable Devices (PDA, Cell phone),
- Disk Driver, Switching Power Supply,
- Over Current Protection in Audio Application,
- DC-DC Converter, Battery Pack, Charger, Adaptor,
- Automotive Engine Control, Power Management Applications,

The trend towards smaller handheld and portable electronics equipment has also increased the need for ultra-small current sensing resistor. Devices from the Token Electronics' TCS series use a thin film construction that enables them to achieve precision resistance tolerances, low noise and long-term stability.

The Token TCS Series precision resistors are nichrome thin film chip resistors with a temperature coefficient of resistance of just ± 50 PPM/ $^{\circ}$ C and tolerances of $\pm 0.5\%$.



They offer excellent stability at high frequencies and are suitable for operating high voltages with more options in the smaller form sizes of 0402, 0603, 0402, 0805, 1206, 2010, and 2512.

The full range of values is from $50m\Omega$ to 1Ω . This low ohm devices are particularly suited to car engine management units to act as current shunt resistors.

The TCS current sense series is fully RoHS compliant and is supplied in tape and reel packaging ready for use with automated assembly processes.

For more chip low ohm resistors, please link to Token official website "<u>Current Sense Resistors</u>". Contact us with your specific needs.


Taiwan Factory: +886 2 29810109 China Factory: +86 755 26055363

Page: 1/9



Construction & Dimensions

Construction & Dimensions (Unit: mm)

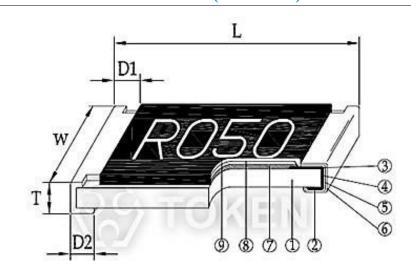

1	Alumina Substrate
2	Bottom Electrode

③ Top Electrode	
-----------------	--

4 Edge Electrode

⑤ Barrier Layer⑥ External Electrode

Resistor Layer

8 Overcoat

Marking

Thin Film Chip Construction

		•				
Туре	L (Unit: mm)	W (Unit: mm)	T (Unit: mm)	D1 (Unit: mm)	D2 (Unit: mm)	Weight(g)/1000pcs
TCS02 (0402)	1.00±0.05	0.50±0.05	0.32±0.10	0.25±0.10	0.20±0.10	0.56
TCS03 (0603)	1.60±0.10	0.80±0.10	0.45±0.10	0.30±0.20	0.30±0.20	3.1
TCS05 (0805)	2.00±0.15	1.25±0.15	0.55±0.10	0.30±0.20	0.40±0.25	5.6
TCS06 (1206)	3.05±0.15	1.55±0.15	0.55±0.10	0.50±0.30	0.40±0.25	12.3
TCS10 (2010)	5.00±0.20	2.45±0.15	0.60±0.15	0.60±0.30	0.50±0.25	26.7
TCS12 (2512)	6.35±0.20	3.15±0.15	0.60±0.10	0.60±0.30	0.55±0.25	49.6



Electrical Specifications

Standard Electrical Specifications Thin Film (TCS)

Туре	Power Rating at 70°C	Resistance Tolerance	Resistance Range	TCR	Operating Temp. Range	
TCS02 (0402)	1/16W	±0.5%, ±1.0%	500mΩ~1000mΩ	±100PPM/°C ±50PPM/°C		
TCS03 (0603)	` '		200mΩ~300mΩ	±100PPM/°C		
TCS05 (0805)	1/8W	±0.5%, ±1.0%	$301 \text{m}\Omega \sim 1000 \text{m}\Omega$	±50PPM/°C		
		±1.0%	$50 \text{m}\Omega \sim 100 \text{m}\Omega$	±200PPM/°C	-55 ~ +155°C	
TCS06 (1206)	1/4W	±0.5%,±1.0%	$101\text{m}\Omega{\sim}300\text{m}\Omega$ $301\text{m}\Omega{\sim}1000\text{m}\Omega$	±100PPM/°C ±50PPM/°C		
TCS10 (2010)	TCS10 (2010) 3/4W		50mΩ~100mΩ	±200PPM/°C		
TCS12 (2512)	1W	±0.5%,±1.0%	$101\text{m}\Omega{\sim}300\text{m}\Omega$ $301\text{m}\Omega{\sim}1000\text{m}\Omega$	±100PPM/°C ±50PPM/°C		

High Power Rating Electrical Specifications Thin Film (TCS)

Туре	Power Rating at 70°C Tolerance		Resistance Range	TCR	Operating Temp. Range
TCS12 (2512)	3W	±0.5%, ±1.0%	$100 \text{m}\Omega {\sim} 1000 \text{m}\Omega$	±100PPM/°C	-55 ~ +155°C

• Token has the ability to manufacture following options based on customer's requirement.


Taiwan Factory: +886 2 29810109 China Factory: +86 755 26055363

Page: 3/9




Recommend Land Pattern (TCS)

Type	A (mm)	B (mm)	C (mm)		
TCS02	0.50	0.50	0.60 ± 0.2		
TCS03	0.80	1.00	0.90±0.2		
TCS05	1.00	1.00	1.35±0.2		
TCS06	2.00	1.15	1.70±0.2		
TCS10	3.60	1.40	2.50±0.2		
TCS12	4.90	1.60	3.10±0.2		



Power Derating Curve (TCS)

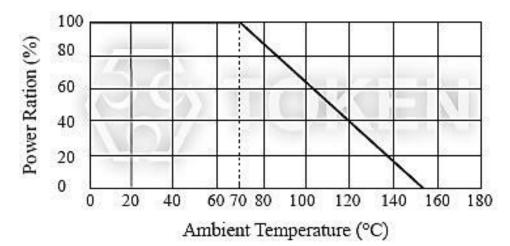

Power Derating Curve (TCS) Series




Environmental Characteristics

Environmental Characteristics (TCS)

Item	Specification	Test Method
Temperature Coefficient of Resistance	As Spec	MIL-STD-202F Method 304 +25/-55/+25/+125/+25°C
Short Time Overload	±1%	JIS-C-5202-5.5 RCWV*2.5 or Max. overload voltage whichever is lower for 5 seconds
Dielectric Withstand Voltage	by Type	MIL-STD-202F Method 301 Apply Max Overload Voltage for 1 minute
Insulation Resistance	>1000MΩ	MIL-STD-202F Method 302 Apply 100VDC for 1 minute
Thermal Shock	±0.5%	MIL-STD-202F Method 107G -55°C~150°C, 100cycles
Load Life (Endurance)	±1%	MIL-STD-202F Method 108A 70±2°C, RCWV for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Humidity (Damp Heat with Load)	±0.5%	MIL-STD-202F Method 103B 40°C, 90~95%RH, RCWV 1.5 hours ON, 0.5 hours OFF, total 1000 hours
Low Temperature Operation	±0.5%	JIS-C-5202-7.1 1hour, -65°C followed by 45minutes of RCWV
Bending Strength	As Spec	JIS-C-5202-6.1.4 Bending Amplitude 3mm for 10seconds
Solderability	95%min coverage	MIL-STD-202F Method 208H 245°C±5°C, 3 seconds
Resistance to Soldering Heat	±0.5%	MIL-STD-202F Method 210E 260±5°C, 10±1 seconds

- Rated continuous Working Voltage (RCWV) = $\sqrt{\text{Power Rating} \times \text{Resistance Value}(\Omega)}$ or Max. Operating voltage whichever is lower.
- Storage Temperature: 15~28°C, Humidity < 80%RH

Reflow Soldering (TCS)

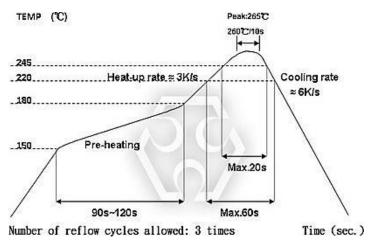

Power Derating Curve (TCS) Series

Taiwan Factory: +886 2 29810109


China Factory: +86 755 26055363



Reel Tape Specifications

Packaging Quantity & Reel Specifications (TCS)


Type	ФА	ФВ	ФС	W	Т	Paper Tape (EA)	Emboss Plastic Tape (EA)
TCS02	178.0±1.0	60.0±1.0	13.5±0.7	9.5±1.0	11.5±1.0	10,000	-
TCS03	178.0±1.0	60.0±1.0	13.5±0.7	9.5±1.0	11.5±1.0	5,000	-
TCS05	178.0±1.0	60.0±1.0	13.5±0.7	9.5±1.0	11.5±1.0	5,000	-
TCS06	178.0±1.0	60.0±1.0	13.5±0.7	9.5±1.0	11.5±1.0	5,000	-
TCS10	178.0±1.0	60.0±1.0	13.5±0.7	13.5±1.0	15.5±1.0	-	4,000
TCS12	178.0±1.0	60.0±1.0	13.5±0.7	13.5±1.0	15.5±1.0	-	4,000



Packaging Reel Specifications

Emboss Plastic Tape Specifications (TCS)

Type	A B W		E	E F		P0 P1		Р2 ФD0		
TCS10	2.85±0.10	5.45±0.10	12.0 ± 0.10	1.75 ± 0.10	5.5 ± 0.05	4.00 ± 0.05	4.00 ± 0.10	2.00 ± 0.05	1.50+0.10	1.00 ± 0.20
TCS12	3.40±0.10	6.65±0.10	12.0±0.10	1.75±0.10	5.5±0.05	4.00±0.05	4.00±0.10	2.00±0.05	1.50+0.10	1.00±0.20

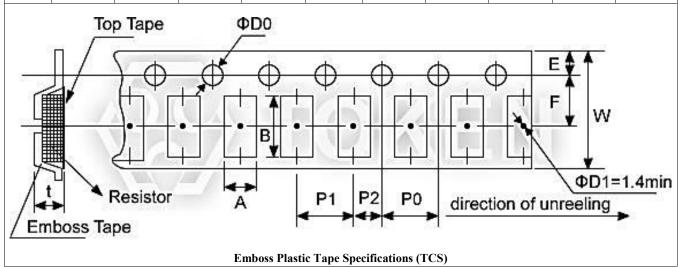


Taiwan Factory: +886 2 29810109

China Factory: +86 755 26055363




Paper Tape Specifications (TCS)

Type	A	В	W	E	F	P0	P1	P2	ФD0	T
TCS02	0.70 ± 0.05	1.16±0.05	8.00±0.10	1.75±0.05	3.50±0.05	4.00±0.10	2.00±0.10	2.00±0.05	1.55±0.05	0.40 ± 0.03
TCS03	1.10±0.05	1.90±0.05	8.00±0.10	1.75±0.05	3.50±0.05	4.00±0.10	4.00±0.10	2.00±0.05	1.55±0.05	0.60±0.03
TCS05	1.60±0.05	2.37±0.05	8.00±0.10	1.75±0.05	3.50±0.05	4.00±0.10	4.00±0.10	2.00±0.05	1.55±0.05	0.75±0.05
TCS06	2.00±0.05	3.55±0.05	8.00±0.10	1.75±0.05	3.50±0.05	4.00±0.10	4.00±0.10	2.00±0.05	1.55±0.05	0.75±0.05

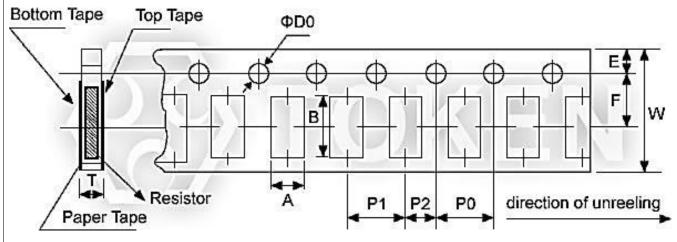

Paper Tape Specifications

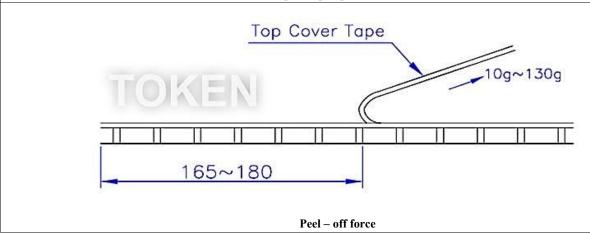

- Peel force of top cover tape
- The peel speed shall be about 300mm/min5±5%
- The peel force of top cover tape shall be between 10 to 100g



Order Codes

Order Codes (TCS)

TCS		02		D		TR		E			1R00			N		
Part Type	(L	ensions ×W)	Resistance Tolerance		olerance D Dulle			TCR (ppm/°C)		wer Rating (W)	Resistance (Ω)			Marking Standard		
	(1	mm)		(%)	-	Taning		Taning	D	±50		Standard	R010	0.01		Marking
	02	0402	F	±1	TR	Reel	Е	±100	R	3W	R100	0.100		No		
	03	0603	D	±0.5		1001		±200			1R00 1.000	N	N Marking			
	05	0805					F	±200			1100	1.000				
	06	1206														
	10	2010														
	12	2512														

3 Digit Marking (0603) (TCS)

Resistance	1Ω	0.1Ω	0.15Ω	0.01Ω	0.101Ω	0.035Ω
Codes	1R0	R10	R15	R01	101	035

4 Digit Marking (0805~2512) (TCS)

Resistance	1Ω	0.1Ω	0.05Ω	0.015Ω	0.01Ω	0.39Ω
Codes	1R00	R100	R050	R015	R010	R390





General Information

Your Current Options - Token Current Sense

As the world becomes more and more technology-driven, the uses for current sensing components will continue to increase. The need for even lower resistance value ranges is already becoming evident, as is the need for these resistors to handle more power. The industry-wide trend is the emergence of smaller and smaller products.

Token Electronics offers a wide variety of current sensing products from the industry to military standards, such as current sense in Thin-Film / Thick-Film Technology, Bare Element Resistors, and Open Air Shunts. This enables Token to present an astounding number of possible solutions for any circuit design needs.

Applications of Current Detecting Components

Token's TCS and CS Series unique form factor provides automotive designers with several advantages. Both TCS and CS Series are ideal for applications involving window lift motors, fuel pump systems, seat belt pretensioners, and pulse width modulator feedback.

The wider resistive element and lower resistance enables higher current to pass through the device. Token's LRC ultra low Ohmic metal strip chip series provides the inherent ability to flex slightly and offers stress relief during extreme temperature cycling on typical or metal substrates. This LRC series is suitable for switch power supply applications (DC-DC Converter, Charger, and Adaptor) and power management of monitor.

The open air design of bare element resistor LRA and LRB Series provide a far cooler operation by allowing more air flow under the resistive element to keep excess heat from being transmitted to the PC board. They are suitable for high power AC/DC detection of power supply circuit.

Token axial moulded BWL series provides power rating up to 10 watts and lower resistance 0.005Ω , is ideal for all types of current sensing applications including switching and linear power supplies, instruments and power amplifiers.

Token standard current sensing components can be replacement for Vishay, IRC, Ohmite, KOA, Yageo devices with fast delivery and more competitive price. Contact us with your specific needs.

