EURO QUARTZ

XO3225 OSCILLATOR

Low Power AT-Cut Clock Oscillator

FEATURES

- AT-Cut crystal for excellent temperature stability
- Low power consumption: 50µA typical at 15pF load
- Wide supply voltage: +1.8 V to 5.0 Volts
- Stability ±20ppm, 25ppm or ±30ppm
- Fast start-up time
- Micro-miniature 3.2mm x 2.5mm package

DESCRIPTION

XO3225 oscillators utilise AT-Cut crystals providing much improved, tight frequency stability as opposed to that stability provided by 32.768kHz oscillators using the more usual X-Cut (tuning fork) crystals. The tight control of frequency provided by these oscillators results in a typical variation of 52 seconds for one month of continuous operation as against 260 seconds over the same period for oscillators that use tuning fork crystals.Other benefits include low supply current consumption coupled with quick start-up times.


SPECIFICATION


Frequency:	32.7680kHz
Frequency stability*	±20ppm, ±25ppm, ±30ppm
	(Overall conditions)
Operating Temperature Range:	-40° to +85°C
Storage Temperature Range:	-55° to +125°C
Input Voltage:	+1.8 Volts to 5.0 Volts ±5%
Input Current:	80µA maximum (50µA typical)
Output Symmetry:	45% to 55% at 1/2 Vdd level
Rise/Fall Times:	6ns maximum (10% to 90%Vdd)
Logic Low '0' Level (Vol):	10% Vdd maximum
Logic High '1' Level (Voh):	90% Vdd minimum
Output Load:	CMOS 15pF maximum
Start-up Time:	1ms maximum
Ageing:	±3ppm max. at 25±3°C 1st year
Enable/Disable Delay Time*:	100ns maximum

NOTE

* The Output (Pad 3) is active if not connected or a voltage to Pad 1 is 'HIGH'. Output is high impedance when 'LOW' or Ground is applied to Pad 1.

STABILITY OVER TEMPERATURE

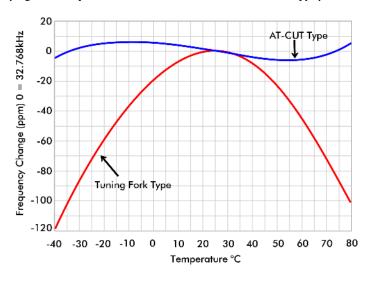









32.768kHz

OUTLINE & DIMENSIONS

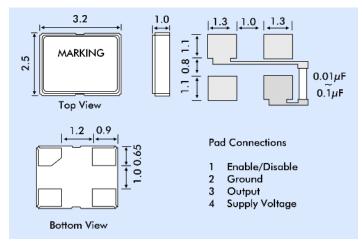


INPUT CURRENT vs. VDD



PART NUMBERS

XO3225 oscillators part numbers are ordered as follows:



EUROQUARTZ LIMITED Blacknell Lane CREWKERNE Somerset UK TA18 7HE Tel: +44 (0)1460 230000 Fax: +44 (0)1460 230001 info@euroquartz.co.uk www.euroquartz.co.uk