

DESCRIPTION

The A24C256 provides 262144 bits of serial electrically erasable and programmable read-only memory (EEPROM), organized as 32768 words of 8 bits each.

The device is optimized for use in many industrial and commercial applications where low-power and low-voltage operation are essential.

The A24C256 offers an additional page, named the Identification Page (64 bytes). The Identification Page can be used to store sensitive application parameters which can be (later) permanently locked in Read-only mode.

The A24C256 is available in SOP8, TSSOP8, DFN8, DIP8 and CSP4 packages.

ORDERING INFORMATION

Package Type		Part Number		
		A24C256M8R		
SOP8	M8	A24C256M8U		
3070	IVIO	A24C256M8VR		
		A24C256M8VU		
		A24C256TMX8R		
TSSOP8	TMX8	A24C256TMX8U		
133060	I IVIAO	A24C256TMX8VR		
		A24C256TMX8VU		
DFN8	J8	A24C256J8R		
DENO	Jo	A24C256J8VR		
DIP8	P8	A24C256P8U		
DIFO	FO	A24C256P8VU		
CSP4	G4	A24C256G4R		
CSP4	G4	A24C256G4VR		
	V: Halogen free Package			
Note	R: Tape & Reel			
	U: Tube			
AiT provides all RoHS products				

FEATURES

- Compatible with all I²C bidirectional data transfer protocol
- Memory array:

256k bits (32k bytes) of EEPROM

Page size: 64 bytes

Additional Write lockable page

- Single supply voltage and high speed:
 - 1 MHz (2.5V)
 - 400 kHz (1.7V)

100 kHz (1.7V)

Random and sequential Read modes

Write:

Byte Write within 5 ms

Page Write within 5 ms

Partial Page Writes Allowed

- Write Protect Pin for Hardware Data Protection
- Schmitt Trigger, Filtered Inputs for Noise Suppression
- High reliability

Endurance: 1 Million Write Cycles

Data Retention: 100 Years


Enhanced ESD/Latch-up protection

HBM 8000V

 Available in SOP8, TSSOP8, DFN8, DIP8 and CSP4 Packages



PIN DESCIPTION

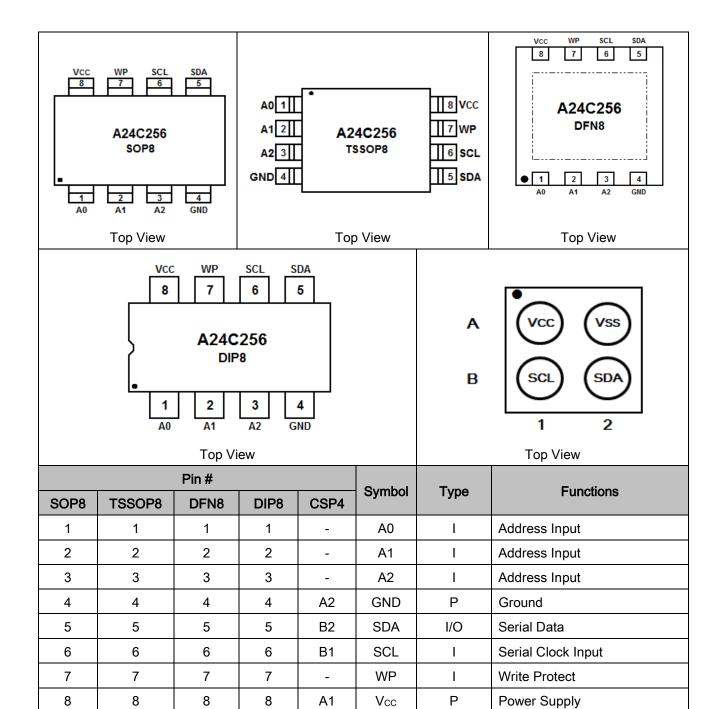



ABSOLUTE MAXIMUM RATINGS

DC Supply Voltage	-0.3V ~ +6.5V
Input / Output Voltage	GND-0.3V ~ V _{CC} +0.3V
Operating Ambient Temperature	-40°C~ +85°C
Storage Temperature	-65°C ~ +150°C
Electrostatic Pulse (Human Body Model)	8000V

Stress beyond above listed "Absolute Maximum Ratings" may lead permanent damage to the device. These are stress ratings only and operations of the device at these or any other conditions beyond those indicated in the operational sections of the specifications are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

PIN CAPACITANCE

Applicable over recommended operating range from: $T_A = 25$ °C, f = 1.0MHz, $V_{CC} = +1.7$ V

Parameter	Symbol	Condition	Min.	Тур.	Max.	Unit
Input / Output Capacitance (SDA)	C _{I/O}	V _{I/O} =0V	-	-	8	рF
Input Capacitance (A0, A1, A2, SCL)	Cin	V _{IN} =0V	-	-	6	pF



DC ELECTRICAL CHARACTERISTICS

Applicable over recommended operating range from: $T_A = -40^{\circ}\text{C}$ to +85°C, $V_{CC} = +1.7\text{V}$ to +5.5V, unless otherwise noted

Parameter	Symbol	Condition	Min.	Тур.	Max.	Unit
Supply Voltage	V _{CC1}		1.7	-	5.5	V
Supply Voltage	V _{CC2}		2.5	-	5.5	V
Supply Voltage	V _{CC3}		2.7	-	5.5	V
Supply Voltage	V _{CC4}		4.5	-	5.5	V
Supply Current V _{CC} = 5.0V	Icc1	Read at 400kHz	-	0.4	1.0	mA
Supply Current V _{CC} = 5.0V	I _{CC2}	Write at 400kHz	-	2.0	3.0	mA
Supply Current V _{CC} = 1.7V	I _{SB1}	V _{IN} = V _{CC} or V _{SS}	-	0.6	1.0	μA
Supply Current V _{CC} = 2.5V	I _{SB2}	V _{IN} = V _{CC} or V _{SS}	-	1.0	2.0	μΑ
Supply Current V _{CC} = 2.7V	I _{SB3}	V _{IN} = V _{CC} or V _{SS}	-	1.0	2.0	μA
Supply Current V _{CC} = 5.0V	I _{SB4}	V _{IN} = V _{CC} or V _{SS}	-	2.0	5.0	μΑ
Input Leakage Current	ILI	V _{IN} = V _{CC} or V _{SS}	-	0.10	3.0	μA
Output Leakage Current	ILO	V _{OUT} = V _{CC} or V _{SS}	-	0.05	3.0	μA
Input Low Level	V _{IL1}	V _{CC} = 1.8V to 5.5V	-0.3	-	Vcc x 0.3	V
Input High Level	V _{IH1}	V _{CC} = 1.8V to 5.5V	Vcc x0.7	-	V _{CC} + 0.3	V
Input Low Level	V _{IL2}	V _{CC} = 1.7V	-0.3	-	Vcc x 0.2	V
Input High Level	V _{IH2}	V _{CC} = 1.7V	Vcc x0.7	-	V _{CC} + 0.3	V
Output Low Level Vcc = 5.0V	V _{OL3}	I _{OL} = 3.0mA	-	-	0.4	V
Output Low Level Vcc = 3.0V	V _{OL2}	I _{OL} = 2.1mA	-	-	0.4	V
Output Low Level Vcc = 1.7V	V _{OL1}	I _{OL} = 0.15mA	-	-	0.2	V



AC ELECTRICAL CHARACTERISTICS

Applicable over recommended operating range from: $T_A = -40^{\circ}\text{C}$ to +85°C, $V_{CC} = +1.7\text{V}$ to +5.5V, $C_L = 1$ TTL Gate and 100pF, unless otherwise noted

D	O	1.7V≤V _{CC} <2.5V		2.5V≤V _{CC} <5.5V			1.114	
Parameter	Symbol	Min.	Тур.	Max.	Min.	Тур.	Max.	Unit
Clock Frequency, SCL	f _{SCL}	-	-	400	-	-	1000	kHz
Clock Pulse Width Low	tLOW	1.2	-	-	0.6	-	-	μs
Clock Pulse Width High	t _{HIGH}	0.6	-	-	0.4	-	-	μs
Noise Suppression Time	tı	1	_	50	-	-	50	ns
Clock Low to Data Out Valid	t _{AA}	0.1	-	0.9	0.05	-	0.9	μs
Time the bus must be free before a new transmission can start	t BUF	1.2	-	ı	0.5	-	-	μs
Start Hold Time	thd.sta	0.6	-	-	0.25	-	-	μs
Start Setup Time	t _{SU.STA}	0.6	-	-	0.25	-	-	μs
Data In Hold Time	t _{HD.DAT}	0	-	-	0	-	-	μs
Data In Setup Time	t _{SU.DAT}	100	-	-	100	-	-	ns
Inputs Rise TimeNOTE1	t _R	1	-	0.3	-	-	0.3	μs
Inputs Fall TimeNOTE1	t _F	1	-	300	-	-	300	ns
Stop Setup Time	t su.sто	0.6	-	-	0.25	-	-	μs
Data Out Hold Time	t _{DH}	50	_	-	50	-	_	ns
Write Cycle Time	twR	-	3.3	5	-	3.3	5	ms
5.0V, 25°C, Byte Mode ^{NOTE1}	Endurance	1M	-	-	-	-	-	Write Cycles

NOTE1: This parameter is characterized and is not 100% tested. NOTE2: AC measurement conditions: R_L (connects to V_{CC}): $1.3k\Omega$


Input pulse voltages: 0.3 Vcc to 0.7Vcc

Input rise and fall time: 50ns

Input and output timing reference voltages: $0.5 V_{\text{CC}}$

The value of $R_{\!\scriptscriptstyle L}$ should be concerned according to the actual loading on the user's system.

BLOCK DIAGRAM

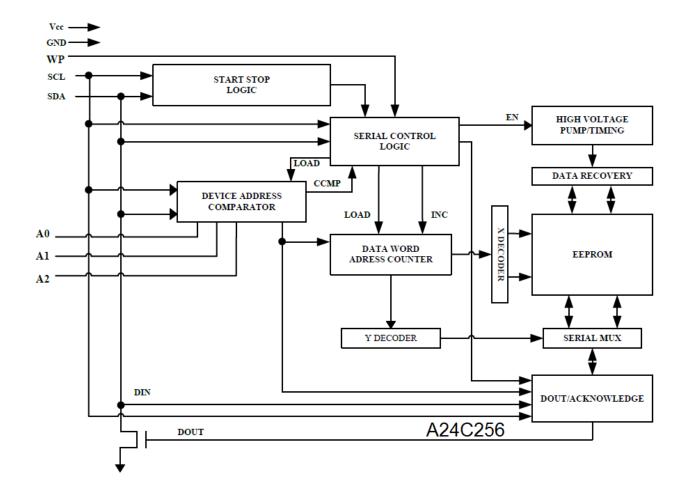

DETAILED INFORMATION

DEVICE/PAGE ADDRESSES (A2, A1 and A0): The A2, A1 and A0 pins are device address inputs that are hard wire for the A24C256. Eight 256k devices may be addressed on a single bus system (device addressing is discussed in detail under the Device Addressing section).

SERIAL DATA (SDA): The SDA pin is bi-directional for serial data transfer. This pin is open-drain driven and may be wire-ORed with any number of other open-drain or open- collector devices.

SERIAL CLOCK (SCL): The SCL input is used to positive edge clock data into each EEPROM device and negative edge clock data out of each device.

WRITE PROTECT (WP): The A24C256 has a Write Protect pin that provides hardware data protection. The Write Protect pin allows normal read/write operations when connected to ground (GND). When the Write Protection pin is connected to V_{CC}, the write protection feature is enabled and operates as shown in the following Table 1.

Table1: Write Protect

WP Pin Status	A24C256			
At Vcc	Full (256k) Array			
At GND	Normal Read/Write Operations			



FUNCTIONAL DESCRIPTION

1. Memory Organization

A24C256, 256k SERIAL EEPROM: Internally organized with 256 pages of 64 bytes each, the 256k requires a 15-bit data word address for random word addressing.

2. Device Operation

CLOCK and DATA TRANSITIONS: The SDA pin is normally pulled high with an external device. Data on the SDA pin may change only during SCL low time periods (see Figure 1 on page 12). Data changes during SCL high periods will indicate a start or stop condition as defined below.

START CONDITION: A high-to-low transition of SDA with SCL high is a start condition which must precede any other command (see Figure 2 on page 12).

STOP CONDITION: A low-to-high transition of SDA with SCL high is a stop condition. After a read sequence, the stop command will place the EEPROM in a standby power mode (see Figure 2 on page 12).

ACKNOWLEDGE: All addresses and data words are serially transmitted to and from the EEPROM in 8-bit words. The EEPROM sends a "0" to acknowledge that it has received each word. This happens during the ninth clock cycle.

STANDBY MODE: The A24C256 features a low-power standby mode which is enabled: (a) upon power-up and (b) after the receipt of the STOP bit and the completion of any internal operations.

MEMORY RESET: After an interruption in protocol, power loss or system reset, any two-wire part can be reset by following these steps:

- 1. Clock up to 9 cycles.
- 2. Look for SDA high in each cycle while SCL is high.
- 3. Create a start condition.



3. Device Addressing

The 256k EEPROM devices all require an 8-bit device address word following a start condition to enable the chip for a read or write operation (see Figure 6 on page 13)

The device address word consists of a mandatory "1", "0" sequence for the first four most significant bits as shown. This is common to all the Serial EEPROM devices.

The 256K EEPROM uses A2, A1 and A0 device address bits to allow as much as eight devices on the same bus. These 3 bits must be compared to their corresponding hardwired input pins. The A2, A1 and A0 pins use an internal proprietary circuit that biases them to a logic low condition if the pins are allowed to float.

The eighth bit of the device address is the read/write operation select bit. A read operation is initiated if this bit is high and a write operation is initiated if this bit is low.

Upon a compare of the device address, the EEPROM will output a "0". If a compare is not made, the chip will return to a standby state.

DATA SECURITY: The A24C256 has a hardware data protection scheme that allows the user to write protect the entire memory when the WP pin is at V_{CC} .

4. Write Operations

BYTE WRITE: A write operation requires an 8-bit data word address following the device address word and acknowledgment. Upon receipt of this address, the EEPROM will again respond with a "0" and then clock in the first 8-bit data word. Following receipt of the 8-bit data word, the EEPROM will output a "0" and the addressing device, such as a microcontroller, must terminate the write sequence with a stop condition. At this time the EEPROM enters an internally timed write cycle, twR, to the nonvolatile memory. All inputs are disabled during this write cycle and the EEPROM will not respond until the write is complete (see Figure 7 on page13).

PAGE WRITE: A write operation requires an 8-bit data word address following the device address word and acknowledgment. Upon receipt of this address, the EEPROM will again respond with a "0" and then clock in the first 8-bit data word. Following receipt of the 8-bit data word, the EEPROM will output a "0" and the addressing device, such as a microcontroller, must terminate the write sequence with a stop condition. At this time the EEPROM enters an internally timed write cycle, twR, to the nonvolatile memory. All inputs are disabled during this write cycle and the EEPROM will not respond until the write is complete (see Figure 8 on page 13).

The data word address lower five bits are internally incremented following the receipt of each data word. The higher data word address bits are not incremented, retaining the memory page row location. When the word address, internally generated, reaches the page boundary, the following byte is placed at the beginning of the



same page. If more than 64 data words are transmitted to the EEPROM, the data word address will "roll over" and previous data will be overwritten.

WRITE IDENTIFICATION PAGE: The Identification Page (64 bytes) is an additional page which can be written and (later) permanently locked in Read-only mode. It is written by issuing the Write Identification Page instruction. This instruction uses the same protocol and format as Page Write (into memory array), except for the following differences:

- Device type identifier = 1011b
- MSB address bits B15/B6 are don't care except for address bit B10 which must be "0".

LSB address bits B5/B0 define the byte address inside the Identification page.

If the Identification page is locked, the data bytes transferred during the Write Identification Page instruction are not acknowledged (NoAck).

ACKNOWLEDGE POLLING: Once the internally timed write cycle has started and the EEPROM inputs are disabled, acknowledge polling can be initiated. This involves sending a start condition followed by the device address word. The read/write bit is representative of the operation desired. Only if the internal write cycle has completed will the EEPROM respond with a "0", allowing the read or write sequence to continue.

5. Read Operations

Read operations are initiated the same way as write operations with the exception that the read/write select bit in the device address word is set to "1". There are three read operations: current address read, random address read and sequential read.

CURRENT ADDRESS READ: The internal data word address counter maintains the last address accessed during the last read or write operation, incremented by one. This address stays valid between operations as long as the chip power is maintained. The address "roll over" during read is from the last byte of the last memory page to the first byte of the first page. The address "roll over" during write is from the last byte of the current page to the first byte of the same page. Once the device address with the read/write select bit set to "1" is clocked in and acknowledged by the EEPROM, the current address data word is serially clocked out. The microcontroller does not respond with an input "0" but does generate a following stop condition (see Figure 9 on page14).



RANDOM READ: A random read requires a "dummy" byte write sequence to load in the data word address. Once the device address word and data word address are clocked in and acknowledged by the EEPROM, the microcontroller must generate another start condition. The microcontroller now initiates a current address read by sending a device address with the read/write select bit high. The EEPROM acknowledges the device address and serially clocks out the data word. The microcontroller does not respond with a "0" but does generate a following stop condition (see Figure 10 on page14).

SEQUENTIAL READ: Sequential reads are initiated by either a current address read or a random address read. After the microcontroller receives a data word, it responds with an acknowledge. As long as the EEPROM receives an acknowledge, it will continue to increment the data word address and serially clock out sequential data words. When the memory address limit is reached, the data word address will "roll over" and the sequential read will continue. The sequential read operation is terminated when the microcontroller does not respond with a "0" but does generate a following stop condition (see Figure 11 on page14)

READ IDENTIFICATION PAGE: The Identification Page (64 bytes) is an additional page which can be written and (later) permanently locked in Read-only mode.

The Identification Page can be read by issuing an Read Identification Page instruction. This instruction uses the same protocol and format as the Random Address Read (from memory array) with device type identifier defined as 1011b. The MSB address bits B15/B6 are don't care, the LSB address bits B5/B0 define the byte address inside the Identification Page. The number of bytes to read in the ID page must not exceed the page boundary (e.g.: when reading the Identification Page from location 10d, the number of bytes should be less than or equal to 54, as the ID page boundary is 64 bytes)

LOCK IDENTIFICATION PAGE: The Lock Identification Page instruction (Lock ID) permanently locks the Identification page in Read-only mode. The Lock ID instruction is similar to Byte Write (into memory array) with the following specific conditions:

Device type identifier = 1011b

Address bit B10 must be '1'; all other address bits are don't care

The data byte must be equal to the binary value xxxx xx1x, where x is don't care

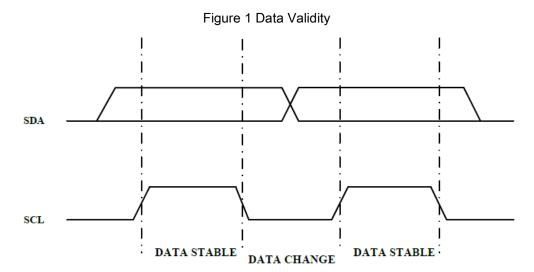


Figure 2 Start and Stop Definition

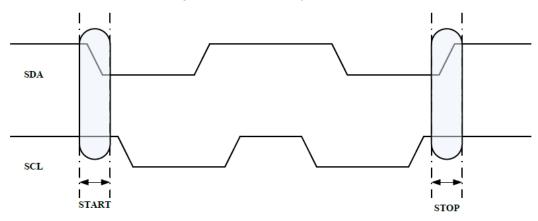


Figure 3 Output Acknowledge


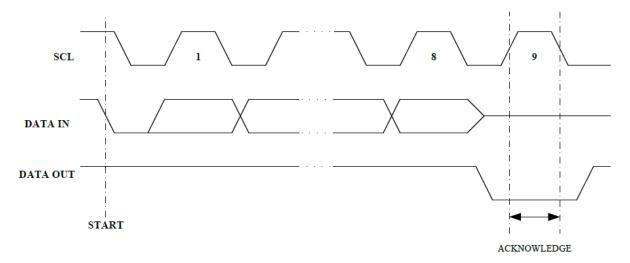


Figure 4 First Word Address


B15	B14	B13	B12	B11	B10	В9	В8
Figure 5 Second Word Address							
В7	В6	В5	B4	В3	B2	B1	В0
	Figure 6 Device Address						
MSB			-				LSB
1	0	1	0	A2	A1	A 0	R/W

Figure 7 Byte Write

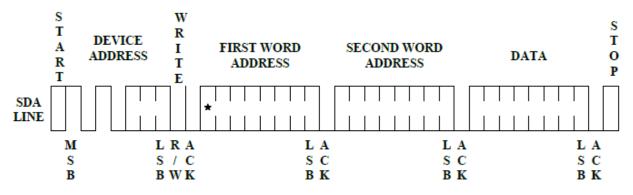

Note.1*=DON'T'T CARE bits

Figure 8 Page Write

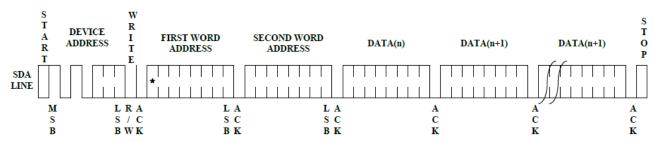

Note.1*=DON'T CARE bits





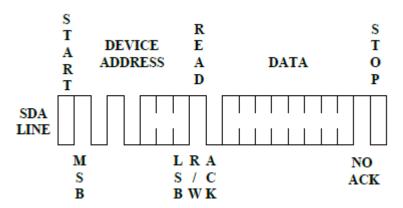


Figure 10 Random Read

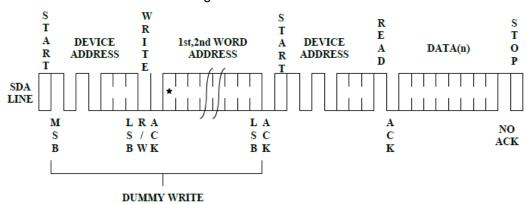


Note.1*=DON'T CARE bits

Figure 11 Sequential Read

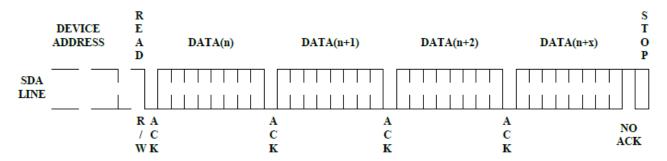


BUS TIMING

Figure 12 SCL: Serial Clock, SDA: Serial Data I/O

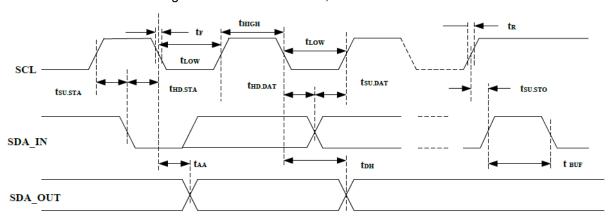

WRITE CYCLE TIMING

Figure 13 SCL: Serial Clock, SDA: Serial Data I/O

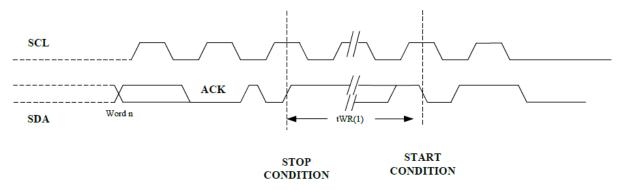



NOTE: The write cycle time twR is the time from a valid stop condition of a write sequence to the end of the internal clear/write cycle.




PACKAGE INFORMATION

Dimension in SOP8 (Unit: mm)








Symbol	Min	Max		
Α	1.35	1.75		
A1	0.10	0.25		
b	0.31	0.51		
С	0.17	0.25		
D	4.80	5.00		
E1	3.81	3.99		
Е	5.79	6.20		
е	1.27BSC			
L	0.40	1.27		
θ	0°	8°		




Dimension in TSSOP8 Package (Unit: mm)

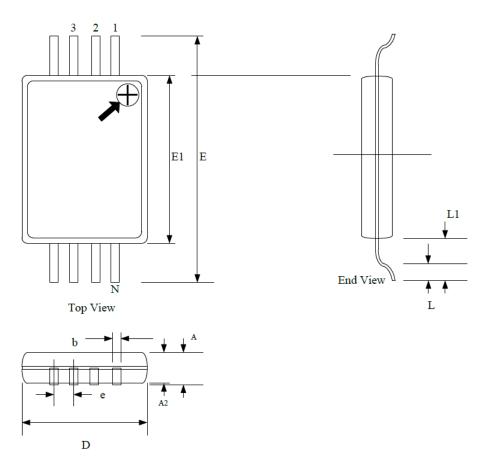

Side View

Symbol	Min	Max		
D	2.90	3.10		
E	6.40	BSC		
E1	4.30	4.50		
Α	-	1.20		
A2	0.80	1.05		
b	0.19	0.30		
е	0.65 BSC			
L	0.45 0.75			
L1	1.00 REF			


Dimension in DFN8 (Unit: mm)

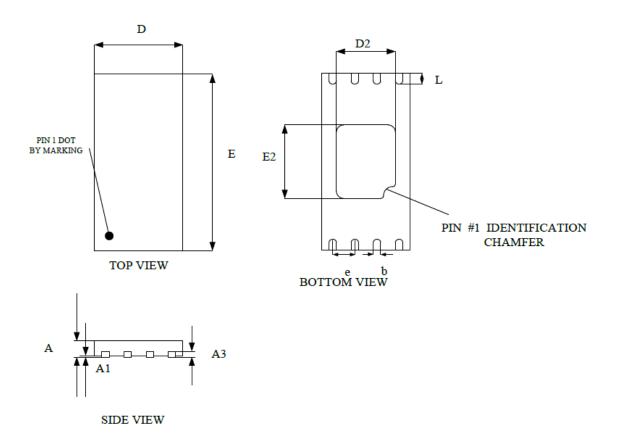



Symbol	Min	Max		
Α	>0.50	0.60		
A1	0.00	0.05		
A3	0.15	REF.		
D	1.95	2.05		
E	2.95	3.05		
b	0.20	0.30		
L	0.20	0.40		
D2	1.25	1.50		
E2	1.15	1.40		
е	0.50 BSC			



Dimension in DIP8 (Unit: inches)










End View

Symbol	Min	Max		
Α	-	0.210		
A2	0.115	0.195		
b	0.014	0.022		
b2	0.045	0.070		
b3	0.030	0.045		
С	0.008	0.014		
D	0.355	0.400		
D1	0.005	-		
Е	0.300	0.325		
E1	0.240	0.280		
е	0.100 BSC			
eA	0.300 BSC			
L	0.115	0.150		

Dimension in CSP4 (Unit: mm)







SIDE VIEW

Symbol	Min	Max			
Α	0.270	0.310			
A1	0.045	0.065			
A2	0.215	0.255			
D	0.738	0.778			
D1	0.400 BSC				
E	0.668	0.708			
E1	0.400	BSC			
b	0.160	0.200			
X1	0.144 REF				
X2	0.144 REF				
Y1	0.179 REF				
Y2	0.179	REF			



IMPORTANT NOTICE

AiT Semiconductor Inc. (AiT) reserves the right to make changes to any its product, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Semiconductor Inc.'s integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or serve property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Semiconductor Inc. assumes to no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.