# **DATA IMAGE** CORPORATION

# **LCD Module Specification**

ITEM NO.: GM126401SFAYA-R1

### **Table of Contents**

1.	COVER & CONTENTS	1
2.	RECORD OF REVISION ······	2
3.	GENERAL SPECIFICATIONS	3
4.	ABSOLUTE MAXIMUM RATINGS	4
5.	ELECTRICAL CHARACTERISTICS	6
6.	ELECTRO-OPTICAL CHARACTERISTIC	6
7.	TIMING CHARACTERISTICS	9
8.	PIN CONNECTIONS	11
9.	POWER SUPPLY ·····	11
10.	BLOCK DIAGRAM ·····	12
11.	QUALITY ASSURANCE	14
12.	LOT NUMBERING SYSTEM ·····	18
13.	LCM NUMBERING SYSTEM ······	18
14.	PRECAUTIONS IN USE LCM	19
15.	OUTLINE DRAWING	20
16	PACKAGE INFORMATION	21

R&D Dept.	R&D Dept. Q.C. Dept.		Prod. Dept.
Alex	Tric	Then	heien
Version:	Issued Date:	Sheet Code:	Total Pages:
В	2003/4/1		21

Page: 1 / 21

# 2. RECORD OF REVISION

ters. ndition.
Hullion.
ated

Page: 2 / 21

# 3. GENERAL SPECIFICATION

Display Format :	128 (\	<b>W)</b> ×	64 (H	) dots
Dot Size :	0.48 (\	W) ×	0.48 (H	) mm
View Area :	72.5 (\	W) ×	39.5 (H	) mm
General Dimensions :	93 (\	W) ×	70 (H	$1) \times 12.5 (T) \text{ mm Max}.$
Weight:	83 g max.			
LCD Type :	STN Gray	VSTN	Yellow	FSTN
Polarizer mode :	Reflective	V Trans	sflective	
	Transmissive	Nega	ative	
View Angle :	V 6 O'clock	12 O	'clock	Others
Backlight :	V LED	EL		CCFL
Backlight Color :	V Yellow green	Amb	er	Blue Green
	White	Othe	rs	
Controller / Driver :	KS0107/KS0108			
Temperature Range :	V Normal Operating 0 to Storage -20	to 50°C 0 to 70°C	Оре	e Temperature erating -20 to 70°C rage -30 to 80°C

Page: 3 / 21

### 4. ABSOLUTE MAXIMUM RATINGS

### 4.1 ELECTRICAL ABSOLUTE MAXIMUM RATINGS

 $V_{SS}=0V$ , Ta=25°C

Item	Symbol	Min.	Max.	Unit
Supply Voltage (Logic)	VDD-VSS	0	8	٧
Supply Voltage (LCD Driver)	VDD-VO	0	16.5	V
Input Voltage	Vı	VSS-0.3	VDD+0.3	V
Operating Temperature	Тор	0	50	°C
Storage Temperature	Тѕтс	-20	70	°C

### 4.2 ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS

Item	Operating		Sto	rage	Comment	
item	(Min.)	Max.)	(Min.)	(Max.)	Comment	
Ambient Temp	0	50	-20	70	Note (1)	
Humidity	Note (2)		Note(2)		Without Condensation	
Vibration		4.9M/S <sup>2</sup>		19.6M/S <sup>2</sup>	XYZ Direction	
Shock		29.4M/S <sup>2</sup>		490M/S <sup>2</sup>	XYZ Direction	

Note(1) Ta =  $0^{\circ}$ C : 50Hr Max. Note(2) Ta  $\leq 40^{\circ}$ C : 90% RH Max.

Ta  $\geq 40^{\circ}$ C: Absolute humidity must be lower than the humidity

of 90% RH at 40°C.


Page: 4 / 21

# 4.3 Electronic Static Discharge maximum rating


ESD test method: IEC1000-4-2

Item	Description					
Testing environment	Ambient temperature :15°C to 35 °C					
	Humidity: 30% to 60 %					
	LCM (E.U.T)	LCM (E.U.T): Power up				
Testing equipment	Manufacture: Noise Ken, Model No. ESD-100L					
Testing condition	See drawing 1					
Direct discharge	$0 \text{ to } \pm 6 \text{ KV}$	Discharge point, see drawing 2				
Indirect discharge	$0 \text{ to } \pm 12\text{KV}$	Discharge point, see drawing 1				
Pass condition	No malfunction of unit. Temporary malfunction of unit which					
	can be recovered by system reset					
Fail condition	Non. Recovera	ble malfunction of LCM or system				

FIG 1 ESD TESTING EQUIPMENT

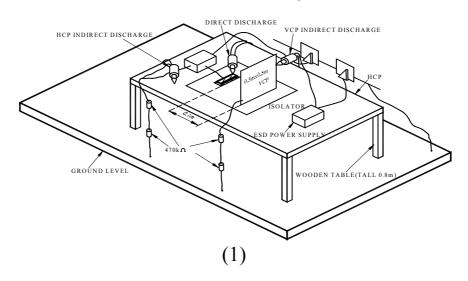

# DIRECT CONTACT DISCHARGE CONTACT POINT : A.B.C.D



Page: 5 / 21

## 5. ELECTRICAL CHARACTERISTICS

Item	Symbol	Condition	Min.	Тур.	Max.	Unit
Supply Voltage (Logic)	VDD-VSS		4.5	5.0	5.5	V
		0°C	9.0	9.5	10.0	
Supply Voltage (LCD)	oltage V <sub>DD-</sub> Vo	25°C	8.6	9.3	9.7	V
,		50°C	8.2	8.8	9.2	
Input Voltage	VIH		0.7Vss		Vdd	V
Input Voltage	VIL		Vss		0.3VDD	V
Logic Supply Current	IDD	VDD-Vss=5V		3.8	6	mA

### 6. ELECTRO-OPTICAL CHARACTERISTICS

ITEM	Symbol	Condition	Min.	Тур.	Max.	Unit	Ref.
Rise Time	Tr	0°C		400	600	Ms	Note (4)
Rise Time		25°C	1	110	170	IVIS	
Fall Time	Tf	0°C	1	500	800	Ms	Note (1)
Fall Time	11	25°C		110	170	IVIS	
Contrast	CR	25°C	1	3	1		Note (3)
Viow Anglo	θ1~θ2	25°C &	60	1	1		Note (2)
View Angle	Ø1, Ø2	CR≥1.5	-30		30		Note (2)
Frame Frequency	Ff	25°C		64		Hz	

Note (1) & (2): See next page


Note (3): Contrast ratio is defined under the following condition:

# CR= Brightness of non-selected condition Brightness of selected condition

- ( a ). Temperature ----- 25°C
- (b). Frame frequency ---- 64Hz
- (c). Viewing angle -----  $\theta$ = 0°,  $\varnothing$  = 0°
- (d). Operating voltage --- 9.3V

Page: 6 / 21

Note (1) Response time is measured as the shortest period of time possible between the change in state of an LCD segment as demonstrated below:

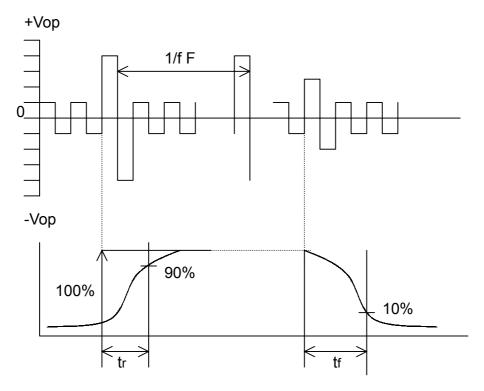


#### Condition:

- (a). Temperature -----25°C
- (b). Frame frequency ----- 64Hz
- (c). View Angle -----  $\theta = 0^{\circ}, \varnothing = 0^{\circ}$
- (d). Operating voltage ----- 9.3V


Note (2) Definition of View Angle

Top – Bottom direction



**Bottom** 

Right -- Left direction



### 6.1 LED ELECTRO-OPTICAL CHARACTERISTIC

Ta = 25°C


Item	Symbol	Condition	Min.	Тур.	Max.	Unit
Forward Voltage	VF	IF = 330mA Yellow Green		4.2	4.6	V
Luminous Intensity	Iv	IF = 330mA Yellow Green	120	180		cd/m <sup>2</sup>
Peak Emission	λР	IF = 330mA Yellow Green		570	-1	nm
Spectrum Radiation	Δλ	IF = 330mA Yellow Green		30	1	nm
Reverse Current	IR	VR = 8V Yellow Green			0.2	mA

Note: Measured at the LED backlight unit.

### 6.2 LED MAXIMUM OPERATING RANGE

Item	Symbol	Yellow Green	Unit
Power Dissipation	Pad	2.3	W
Forward Current	laf	495	mA
Reverse Voltage	VR	8	V

## 6.2.1 LED ARRAY BLOCK DIAGRAM

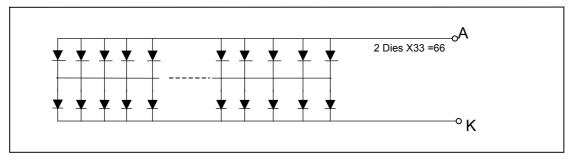


Page: 8 / 21


# 7. TIMING CHARACTERISTICS

### **MPU Interface**

Characteristic	Symbol	Min	Тур	Max	Unit
E Cycle	$t_{\mathrm{C}}$	1000			ns
E High Level Width	$t_{ m WH}$	450			ns
E Low Level Width	$t_{ m WL}$	450			ns
E Rise Time	$t_{\mathrm{R}}$			25	ns
E Fall Time	t <sub>F</sub>			25	ns
Address Set-Up Time	t <sub>ASU</sub>	140			ns
Address Hold Time	t <sub>AH</sub>	10			ns
Data Set-Up Time	$t_{ m SU}$	200			ns
Data Delay Time	t <sub>D</sub>			320	ns
Data Hold Time (Write)	t <sub>DHW</sub>	10			ns
Data Hold Time (Read)	t <sub>DHR</sub>	20			ns

Page: 9 / 21

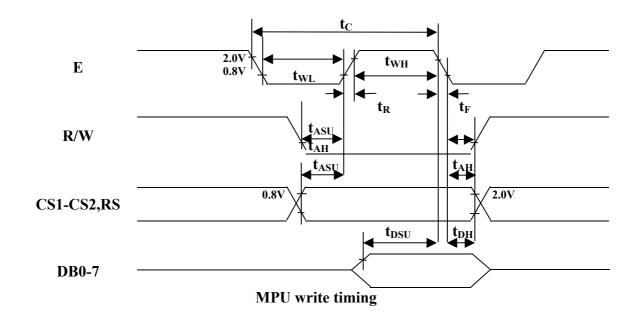

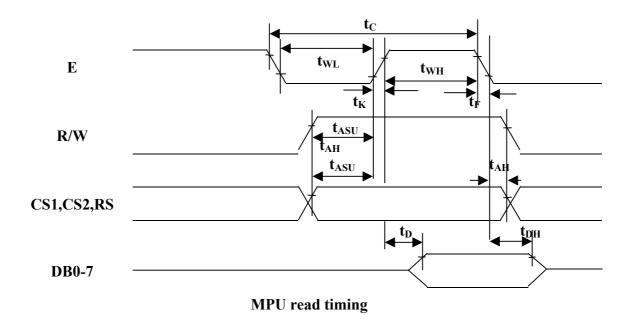


Page: 10 / 21

# 8. PIN CONNECTIONS


No.	Symbol	Function				
1	$V_{SS}$	Ground (0V)				
2	$ m V_{DD}$	+5V				
3	$V_0$	Power Supply For LCD Drive				
4	D/I	$L \rightarrow Instructions \qquad H \rightarrow Data$				
5	D/W	$H \rightarrow Data Read (LCD \rightarrow MPU)$				
3	R/W	$L \rightarrow Data Write (LCD \leftarrow MPU)$				
6	Е	Enable Signal				
7	DB0					
8	DB1					
9	DB2					
10	DB3	Data Bus Line				
11	DB4					
12	DB5					
13	DB6					
14	DB7					
15	CS1	Chip select for IC1, Active high				
16	CS2	Chip select for IC2, Active high				
17	/RST	Reset, Active LOW				
18	$ m V_{EE}$	Negative Voltage Output				
19	LEDK	LED Cathode. Power Supply -				
20	LEDA	LED Anode. Power Supply +				

# 9. POWER SUPPLY

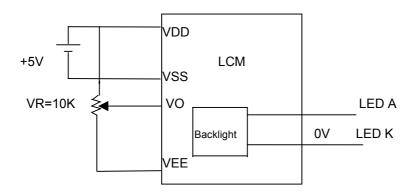

Page: 11 / 21

## 10. BLOCK DIAGRAM

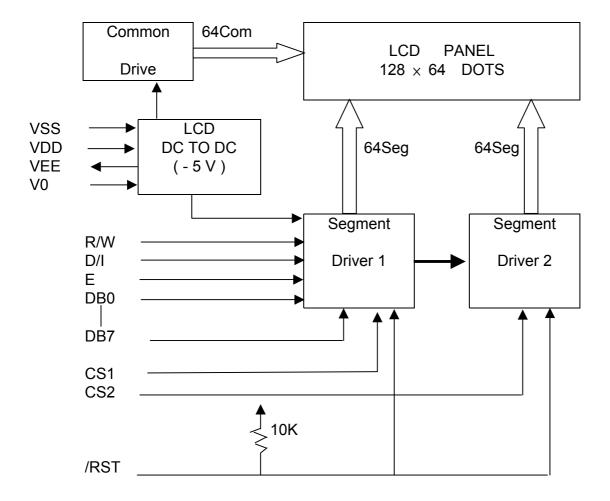

Page: 12 / 21

### DISPLAY CONTROL INSTRUCTION

The display control instructions control the internal state of the KS0108B . Instruction is received from MPU to KS0108B for the display control. The following table shows various instructions.

Instruction	RS	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0	Function	
Display ON/OFF	L	L	L	L	Н	Н	Н	Н	Н	L/H	Controls the display on or off. Internal status and display RAM data is not affected. L: OFF, H: ON	
Set Address	L	L	L	Н		V address (0-63)			Sets the Y address in the Y address counter.			
Set Page (X address)	L	L	Н	L	Н	Н	Н		Page (0-7)		Sets the X address at the X address counter.	
Display Start Line	L	L	Н	Н	Display start line (0-63)				Indicates the display data RAM displayed at the top of the screen			
Status Read	L	Н	B U S Y	L	ON / OFF	R E S E T	L	L	L	L	Read status. BUSY L: Ready H: In operation ON/OFF L: Display ON H: Display OFF RESET L: Normal H: Reset	
Write Display Data	Н	L		Write Data						Writes data (DB0:7)into display data RAM. After writing instruction, Y address is increased by 1 automatically.		
Read Display Data	Н	Н	Read Data					Read data (DB0:7) from display data RAM to the data bus.				

Page: 13 / 21

# 11. QUALITY ASSURANCE

#### 11.1 Test Condition

11.1.1 Temperature and Humidity(Ambient Temperature)

Temperature :  $20 \pm 5^{\circ}$ C Humidity :  $65 \pm 5\%$ 

#### 11.1.2 Operation

Unless specified otherwise, test will be conducted with LCM in operation.

#### 11.1.3 Container

Unless specified otherwise, vibration test will be conducted on module only.

# 11.1.4 Test Frequency Single cycle.

#### 11.1.5 Test Method

No.	Parameter	Conditions	Regulations
1	High Temperature Operating	50 ± 2 °C	Note 3
2	Low Temperature Operating	0 ± 2 °C	Note 3
3	High Temperature Storage	70 ± 2 °C	Note 3
4	Low Temperature Storage	-20 ± 2 °C	Note 3
5	Vibration Test (Non-operation state)	Total fixed amplitude: 1.5mm Vibration Frequency: 10 ~ 55Hz One cycle 60 seconds to 3 directions of X.Y.Z. for each 15 minutes	Note 3
6	Damp Proof Test (Non-operation state)	40°C ± 2°C, 90~95%RH, 96h	Note 1,2
7	Shock Test (Non-operation state)	To be measured after dropping from 60cm high once concrete surface in packing state	Note 3

Note 1: Returned under normal temperature and humidity for 4 hrs.

Note 2: No dew condensation to be observed.


Note 3: No change on display and in operation under the test condition

Page: 14 / 21


## 11.2 Inspection condition

### 11.2.1 Inspection conditions

The LCD shall be inspected under 40W white fluorescent light.



### 11.2.2 Definition of applicable Zones

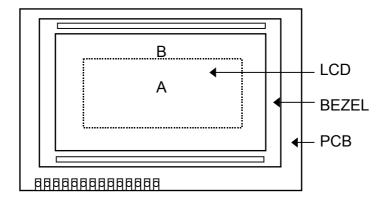


A : Display Area B : Non-Display Area

Page: 15 / 21

## 11.2.3 Inspection Parameters

No.	Parameter	Criteria						
1	Black or White spots	Zone Acceptable number			Class Of	AQL		
		$\begin{array}{c} \text{Dimension} \\ D < 0.15 \\ 0.15 \le D < 0.2 \\ 0.2 \le D \le 0.25 \\ D \le 0.3 \end{array}$	* 4 2 0	8 * 4 2 1	Defects Minor	Level 2.5		
	Countain Contrators	D = (Long + Short) / 2 * : Disregard						
2	Scratch, Substances	Zone  X (mm) Y(mm)  * $0.04 \ge 1$ $3.0 \ge L$ $0.06 \ge 1$ $2.0 \ge L$ $0.08 \ge 1$ - $0.1 < V$	W * W 2	* * 4 4 2 3	Of Defects Minor	AQL Level		
		X : Length Y : Width * : Disregard Total defects should not exceed 4/module						
3	Air Bubbles (between glass & polarizer)							
		Zone		ceptable umber B	Class of Defects	AQL Level		
		D ≤ 0.15 0.15 < D ≤ 0.25 0.25 < D * : Disregard Total defects s	2 0 shall no	*     *     1  ot excess	Minor 3/module.	2.5		
4	Uniformity of Pixel	(1) Pixel shape (with Dent)  0.152						

Page: 16 / 21

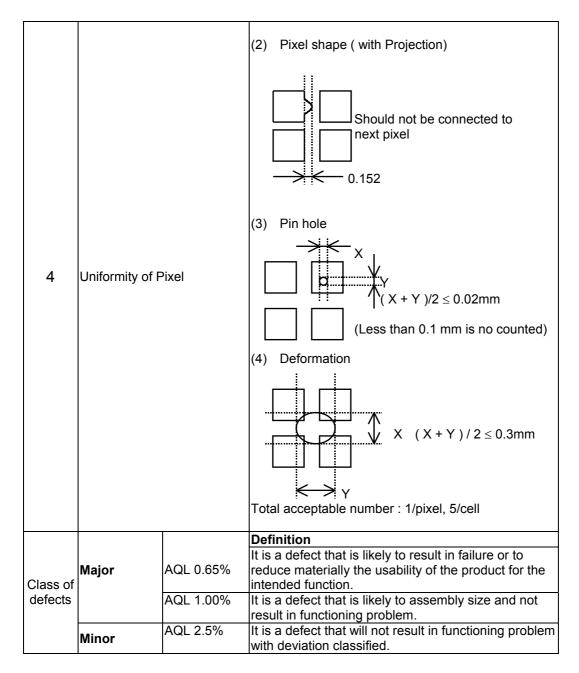

### 11.3 Sampling Condition

Unless otherwise agree in written, the sampling inspection shall be applied to the incoming inspection of customer.

Lot size: Quantity of shipment lot per model.


Sampling type: normal inspection, single sampling

Inspection level: Level II


Sampling table: MIL-STD-105E

Page: 17 / 21

#### 12. LOT NUMBERING SYSTEM

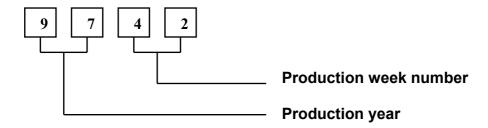

#### 13. LCM NUMBERING SYSTEM

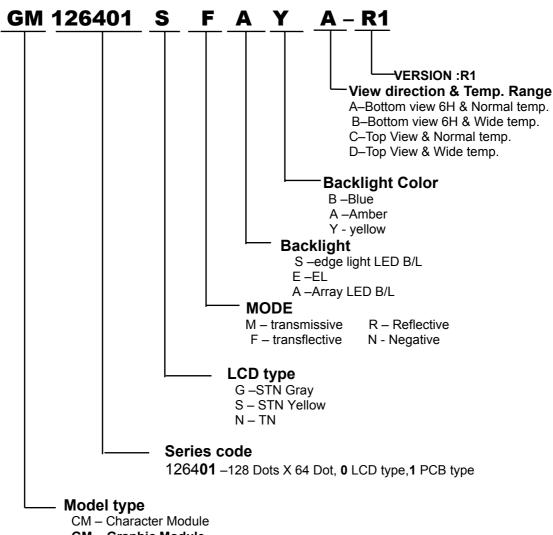

**GM - Graphic Module** 

CX - Custom Character Module

GX - Custom Graphic Module

#### 14. PRECAUTION FOR USING LCM

#### 1. LIQUID CRYSTAL DISPLAY (LCD)

- LCD is made up of glass, organic sealant, organic fluid, and polymer based polarizers. The following precautions should be taken when handing,
- (1). Keep the temperature within range of use and storage. Excessive temperature and humidity could cause polarization degredation, polarizer peel off or bubble.
- (2). Do not contact the exposed polarizers with anything harder than an HB pencil lead. To clean dust off the display surface, wipe gently with cotton, chamois or other soft material soaked in petroleum benzin.
- (3). Wipe off saliva or water drops immediately. Contact with water over a long period of time may cause polarizer deformation or color fading, while an active LCD with water condensation on its surface will cause corrosion of ITO electrodes.
- (4). Glass can be easily chipped or cracked from rough handling, especially at corners and edges.
- (5). Do not drive LCD with DC voltage.

#### 2. Liquid Crystal Display Modules

#### 2.1 Mechanical Considerations

- LCM are assembled and adjusted with a high degree of precision. Avoid excessive shocks and do not make any alterations or modifications. The following should be noted.
- (1). Do not tamper in any way with the tabs on the metal frame.
- (2). Do not modify the PCB by drilling extra holes, changing its outline, moving its components or modifying its pattern.
- (3). Do not touch the elastomer connector, especially insert an backlight panel (for example, EL).
- (4). When mounting a LCM make sure that the PCB is not under any stress such as bending or twisting. Elastomer contacts are very delicate and missing pixels could result from slight dislocation of any of the elements.
- (5). Avoid pressing on the metal bezel, otherwise the elastomer connector could be deformed and lose contact, resulting in missing pixels.

#### 2.2. Static Electricity

LCM contains CMOS LSI's and the same precaution for such devices should apply, namely

- (1). The operator should be grounded whenever he/she comes into contact with the module. Never touch any of the conductive parts such as the LSI pads, the copper leads on the PCB and the interface terminals with any parts of the human body.
- (2). The modules should be kept in antistatic bags or other containers resistant to static for storage.
- (3). Only properly grounded soldering irons should be used
- (4). If an electric screwdriver is used, it should be well grounded and shielded from commutator sparks.

- (5) The normal static prevention measures should be observed for work clothes and working benches; for the latter conductive (rubber) mat is recommended.
- (6). Since dry air is inductive to static, a relative humidity of 50-60% is recommended.

#### 2.3 Soldering

- (1). Solder only to the I/O terminals.
- (2). Use only soldering irons with proper grounding and no leakage.
- (3). Soldering temperature :  $280^{\circ}\text{C} \pm 10^{\circ}\text{C}$
- (4). Soldering time: 3 to 4 sec.
- (5). Use eutectic solder with resin flux fill.
- (6). If flux is used, the LCD surface should be covered to avoid flux spatters. Flux residue should be removed after wards.

#### 2.4 Operation

- (1). The viewing angle can be adjusted by varying the LCD driving voltage V0.
- (2). Driving voltage should be kept within specified range; excess voltage shortens display life.
- (3). Response time increases with decrease in temperature.
- (4). Display may turn black or dark blue at temperatures above its operational range; this is (however not pressing on the viewing area) may cause the segments to appear "fractured".
- (5). Mechanical disturbance during operation (such as pressing on the viewing area) may cause the segments to appear "fractured".

#### 2.5 Storage


If any fluid leaks out of a damaged glass cell, wash off any human part that comes into contact with soap and water. Never swallow the fluid. The toxicity is extremely low but caution should be exercised at all the time.

#### 2.6 Limited Warranty


Unless otherwise agreed between DATA IMAGE and customer, DATA IMAGE will replace or repair any of its LCD and LCM which is found to be defective electrically and visually when inspected in accordance with DATA IMAGE acceptance standards, for a period on one year from date of shipment. Confirmation of such date shall be based on freight documents. The warranty liability of DATA IMAGE is limited to repair and/or replacement on the terms set forth above. DATA IMAGE will not responsible for any subsequent or consequential events.

Page: 19 / 21

#### 15 OUTLINE DRAWING

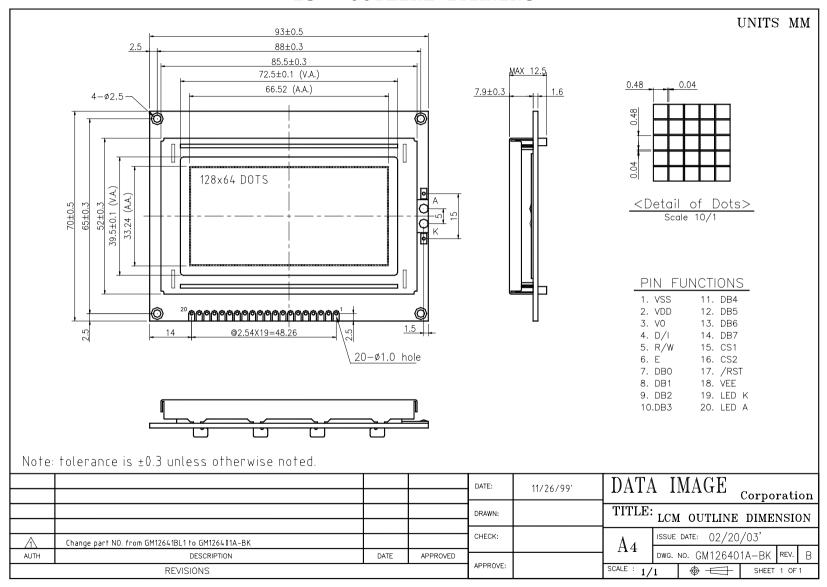

# **16. PACKAGE INFORMATION**

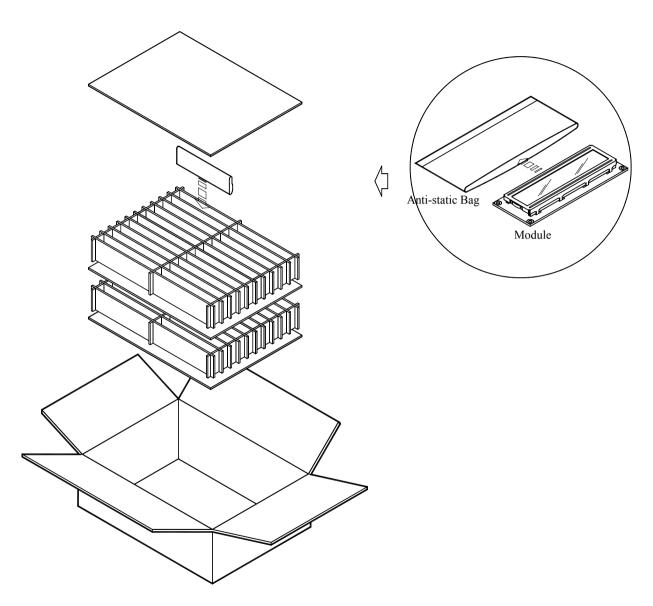

Page: 21 / 21